


DEPARTURE (YPAD -> YSSY): YPAD (Adelaide Intl)

NavData Cycle 2014-10 Expired: Friday, 17 October 2014.

Scale: 1:250000 (1 inch = 3.43 naut mi). Printed on 20 Oct 2014

JEPPESEN

JeppView 3.6.2.0

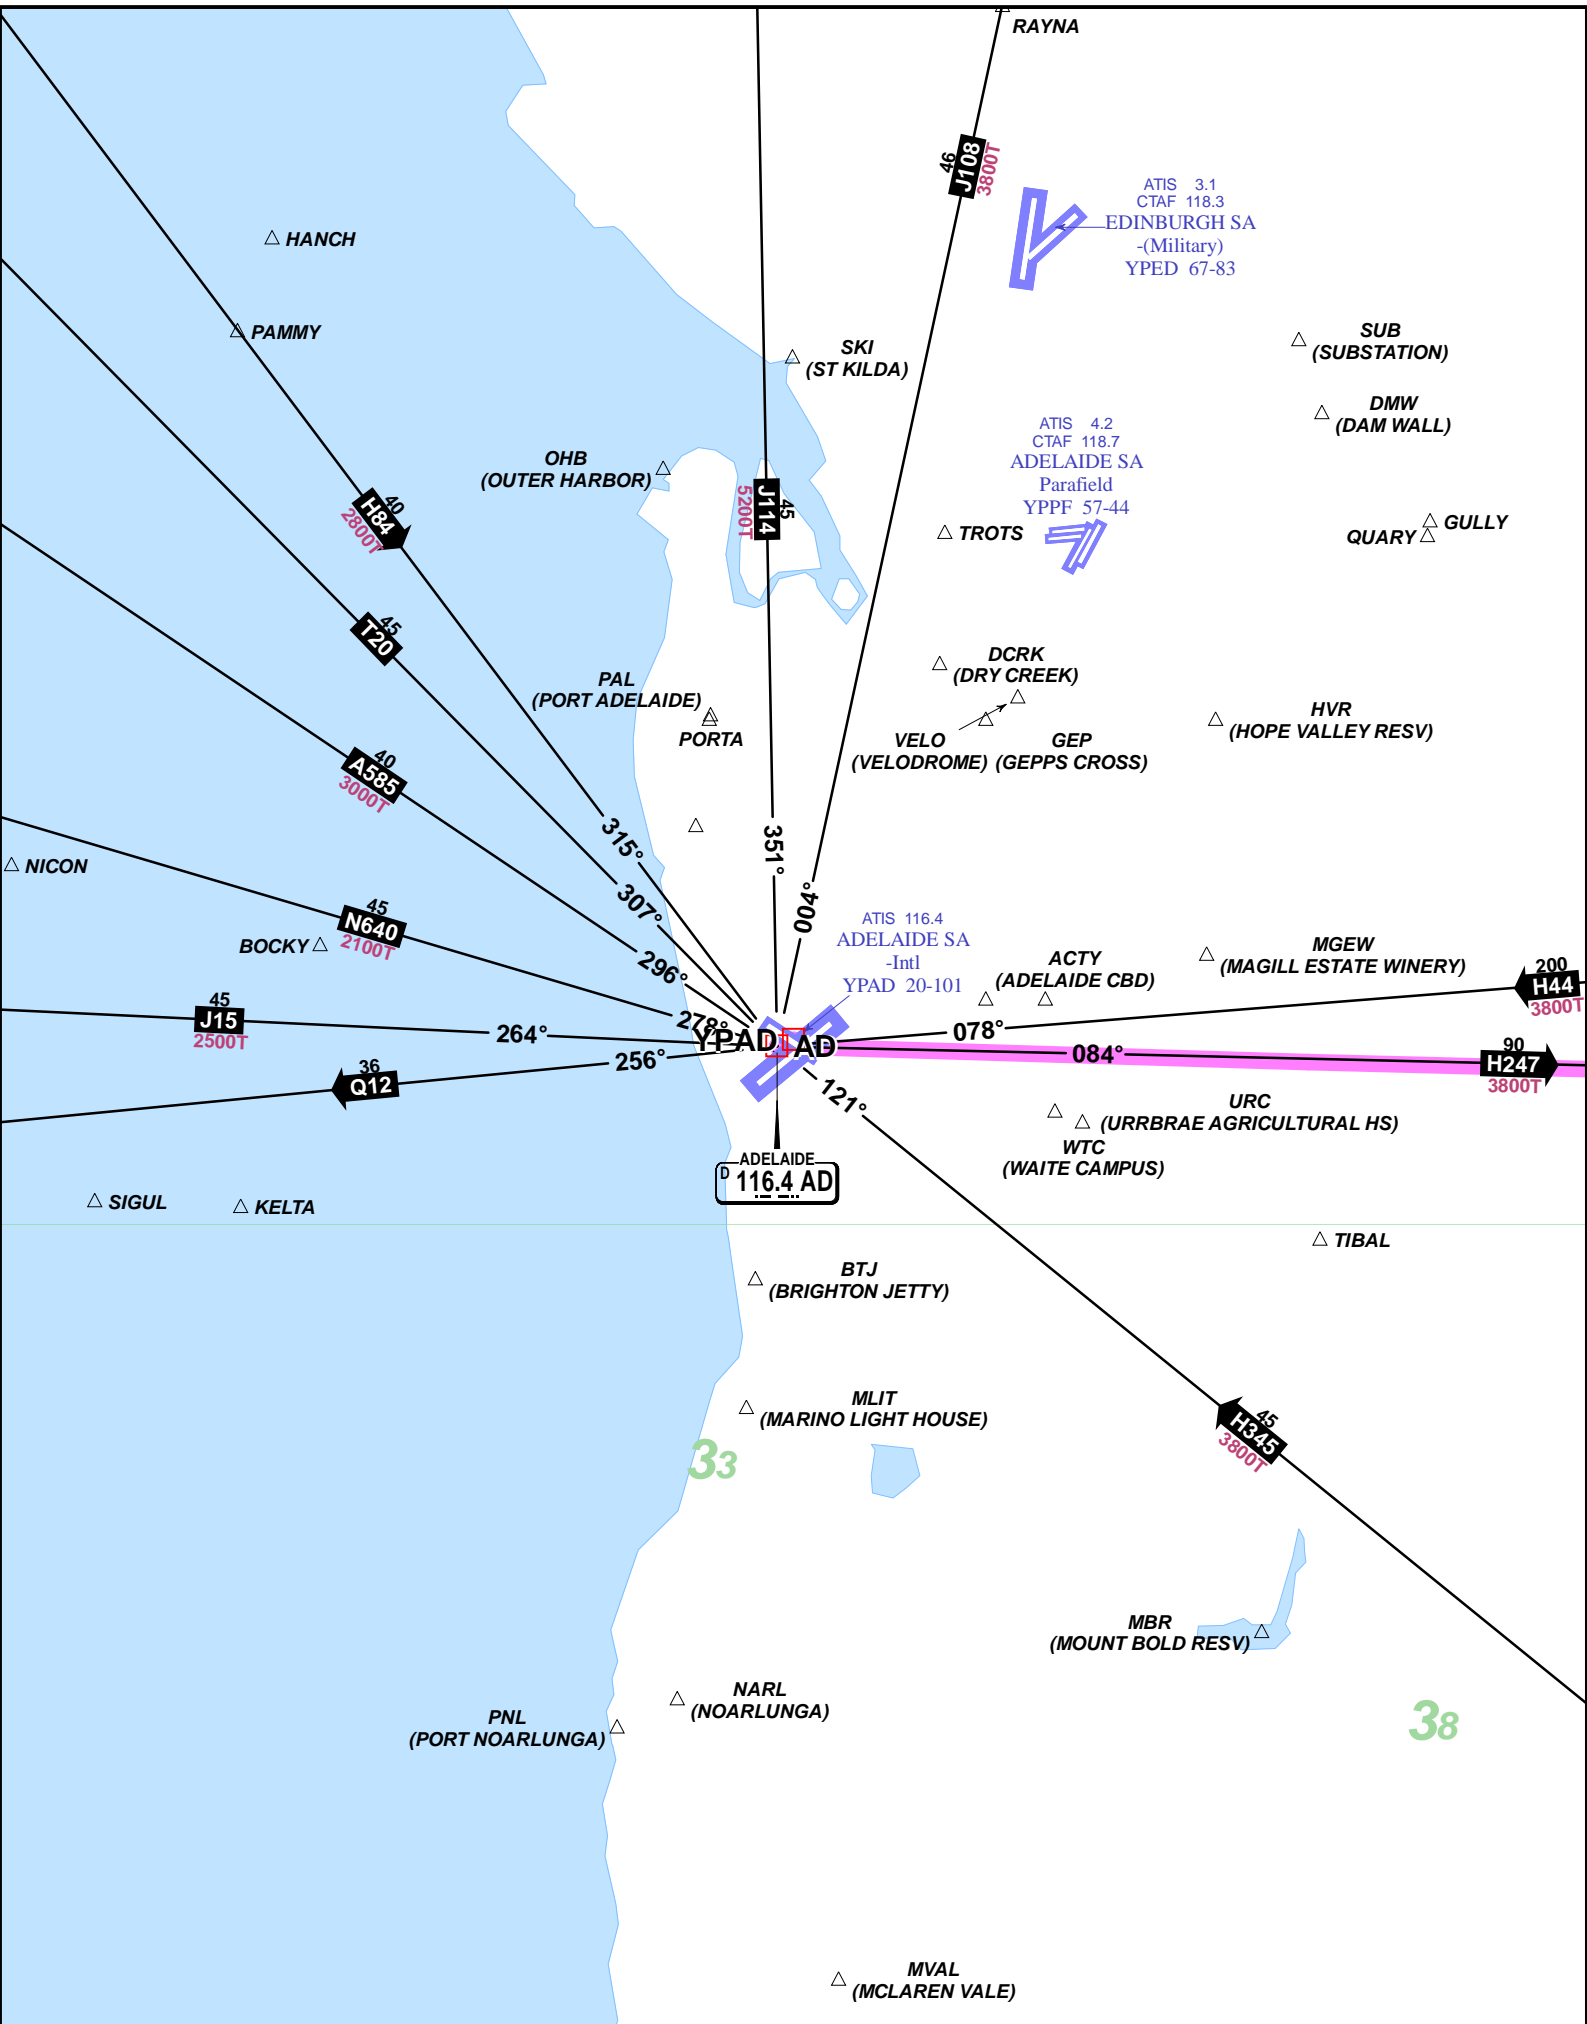


DESTINATION (YPAD -> YSSY): YSSY (Kingsford Smith Intl)


NavData Cycle 2014-10 Expired: Friday, 17 October 2014.

Scale: 1:250000 (1 inch = 3.43 naut mi). Printed on 20 Oct 2014

JEPPESEN

JeppView 3.6.2.0

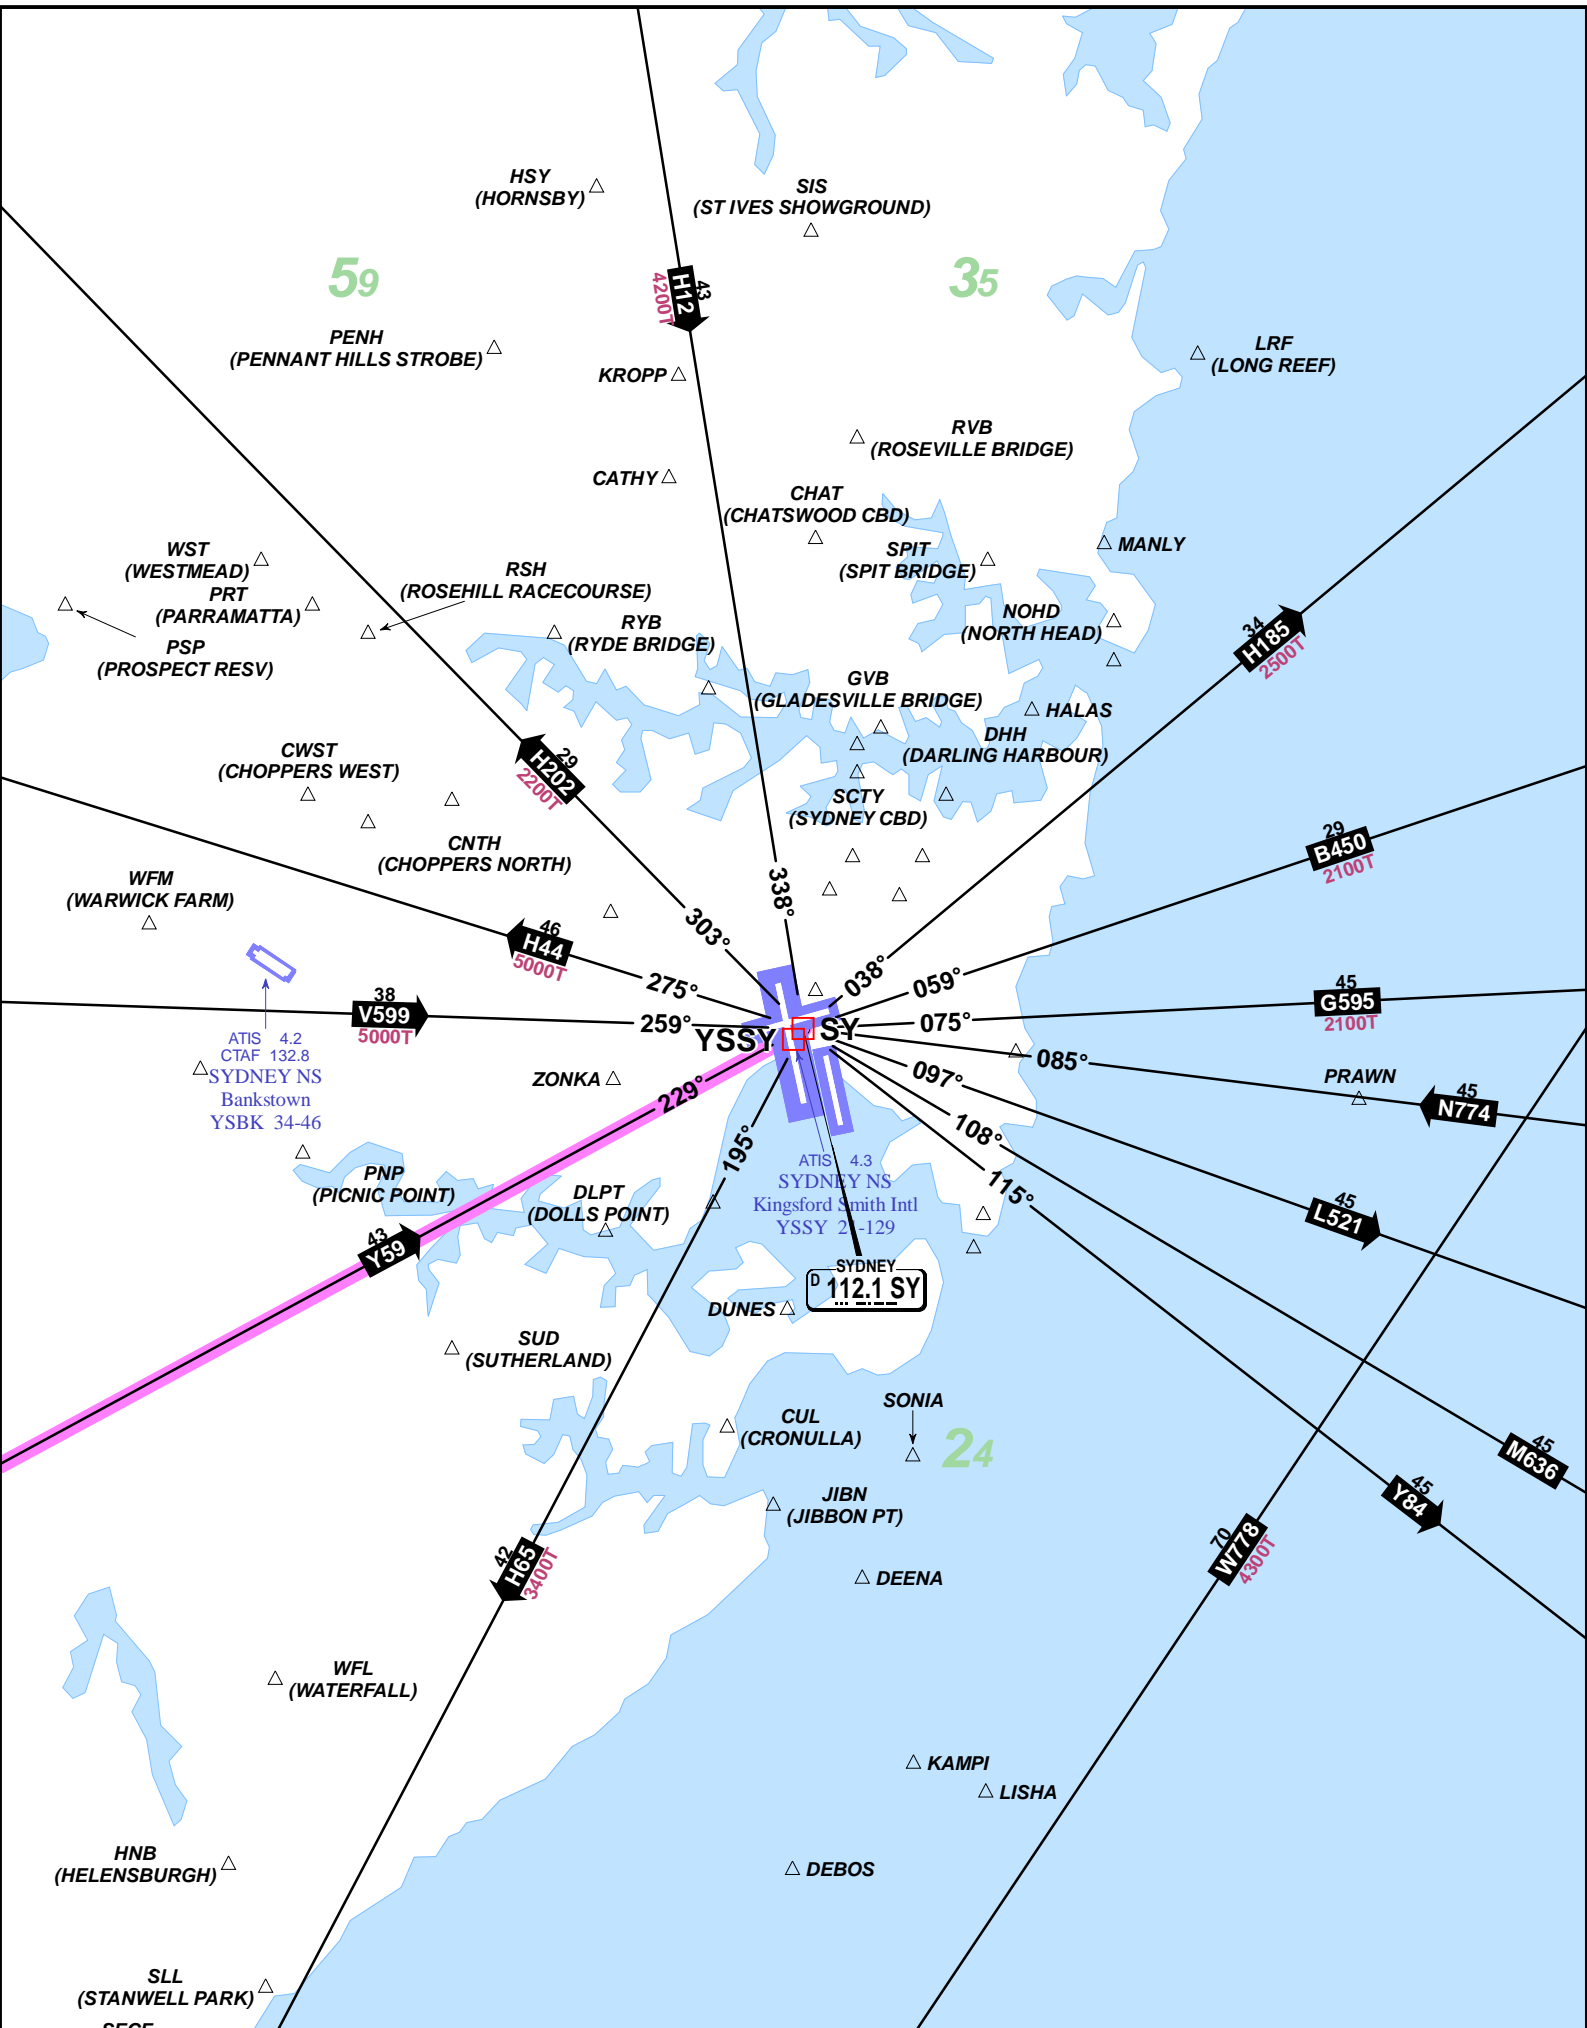

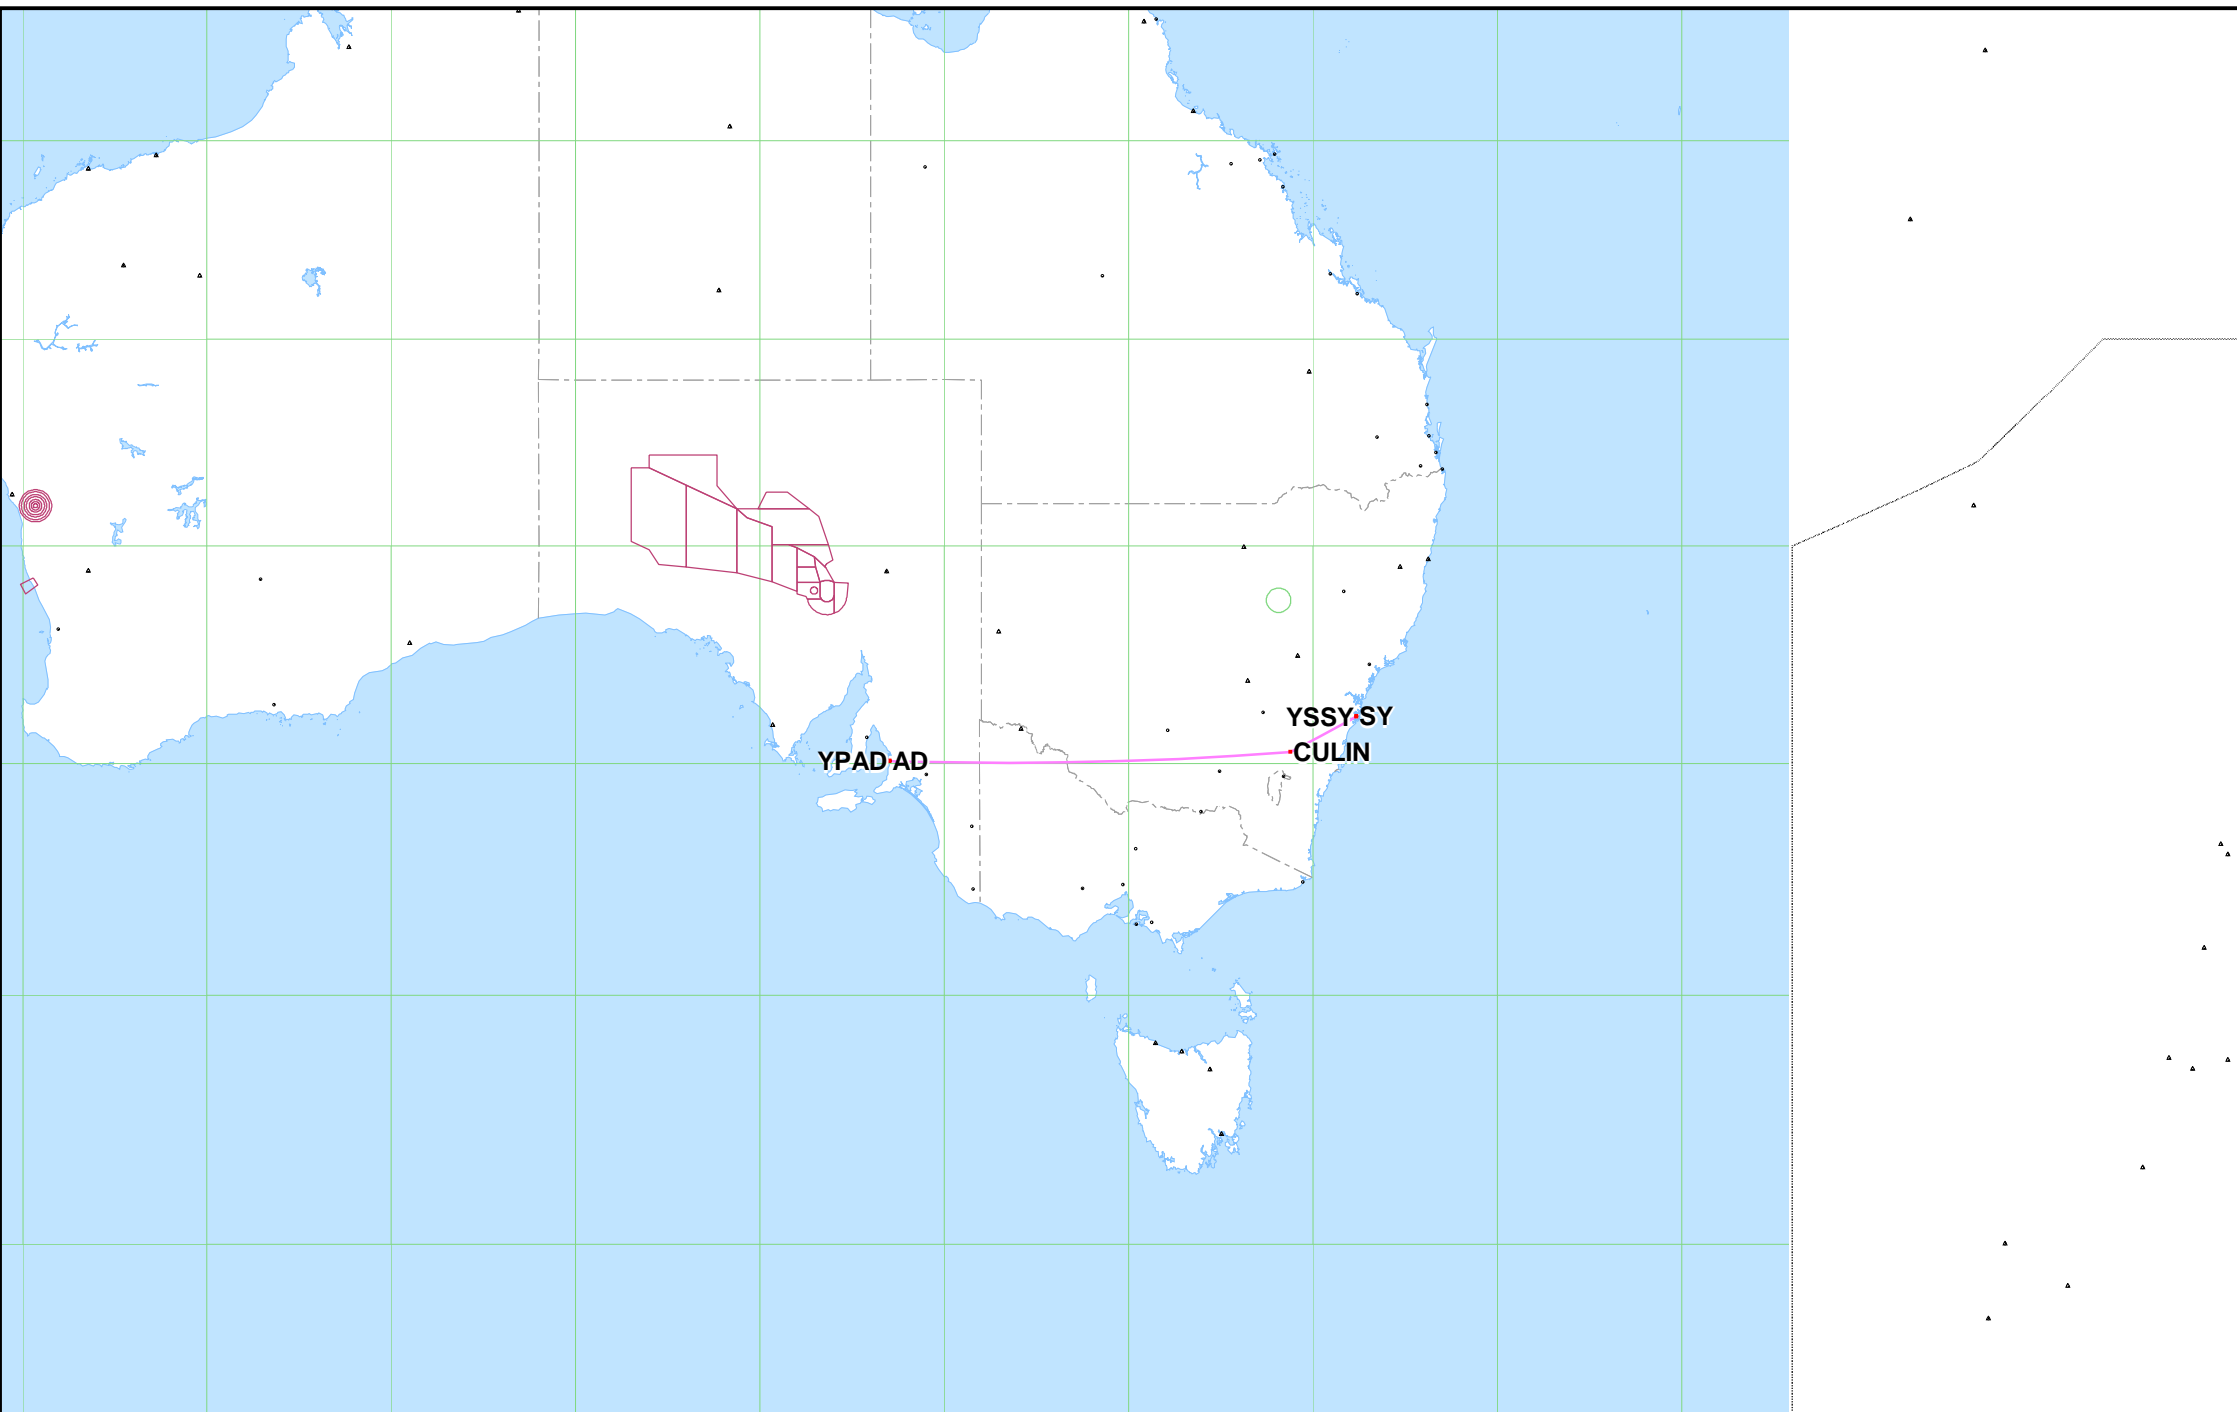

JEPPESEN

9 MAY 14

(10-2)


ATIS 116.4 134.5
ADELAIDE Approach (R) Within 36 NM:
SE of Rwy 05-23 118.2
NW of Rwy 05-23 124.2
ADELAIDE Tower 120.5
Ground 121.7

Alt Set: hPa Trans level: FL 110
Apt Elev: 1 hPa Trans alt: 10000' (9980')

DME or GNSS ARRIVAL
ADELAIDE, SA, AUSTRALIA

ADELAIDE INTL
SECTOR A


MSA
AD VOR
Within 25 NM
3800' Within 10 NM
Apt. Elev 20'




DME USING AD DME
REFERENCE WAYPOINT AD VOR

MBY NDB required
for procedure.

NOT TO SCALE

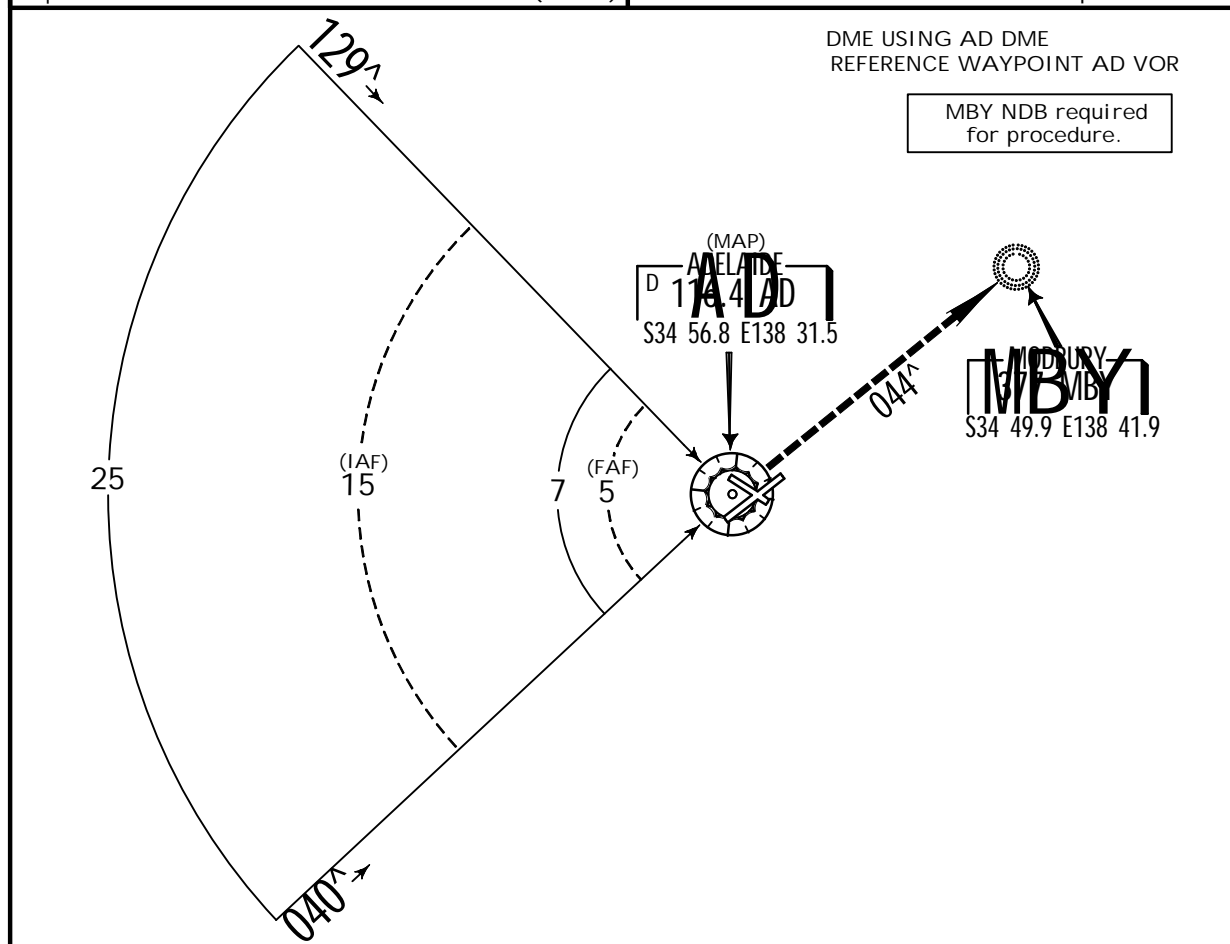


NM to VOR	6.5	6.0	5.0	4.0	3.4	3.3	
ALTITUDE	2000'	1830'	1510'	1190'	1000'	900'	

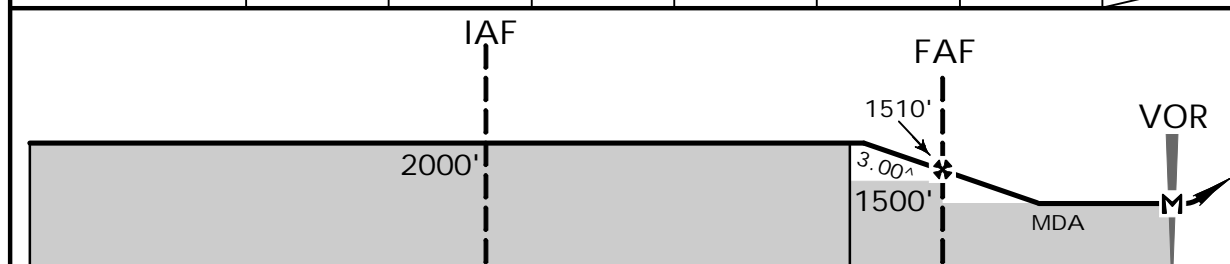

25
MISSED APPROACH: Track 044° to MBY NDB, climb to 3000' or as directed by ATC.

CIRCLE-TO-LAND									
MDA(H)		A, B: 900' (880') C, D: 1000' (980')							
A	2.4 km								
B	4.0 km								
C	5.0 km								
D									
Gnd speed-Kts		70	90	100	120	140	160		
Descent angle 3.00°		372	478	531	637	743	849		



No Circling SOUTH
of Rwy 05-23 beyond
4 DME or beyond 3NM
of threshold of
Rwy 05-23-30.

JEPPESEN

9 MAY 14 (10-2A)

DME or GNSS ARRIVAL
ADELAIDE, SA, AUSTRALIA

ADELAIDE INTL

SECTOR B

ATIS 116.4 134.5

ADELAIDE Approach (R) Within 36 NM:

SE of Rwy 05-23 118.2

NW of Rwy 05-23 124.2

ADELAIDE Tower 120.5


Ground 121.7

Alt Set: hPa

Trans level: FL 110

Apt Elev: 1 hPa

Trans alt: 10000' (9980')




MSA
AD VOR
Within 25 NM
3800' Within 10 NM

VOR 116.1


Apt. Elev 20'

DME USING AD DME
REFERENCE WAYPOINT AD VOR

NOT TO SCALE

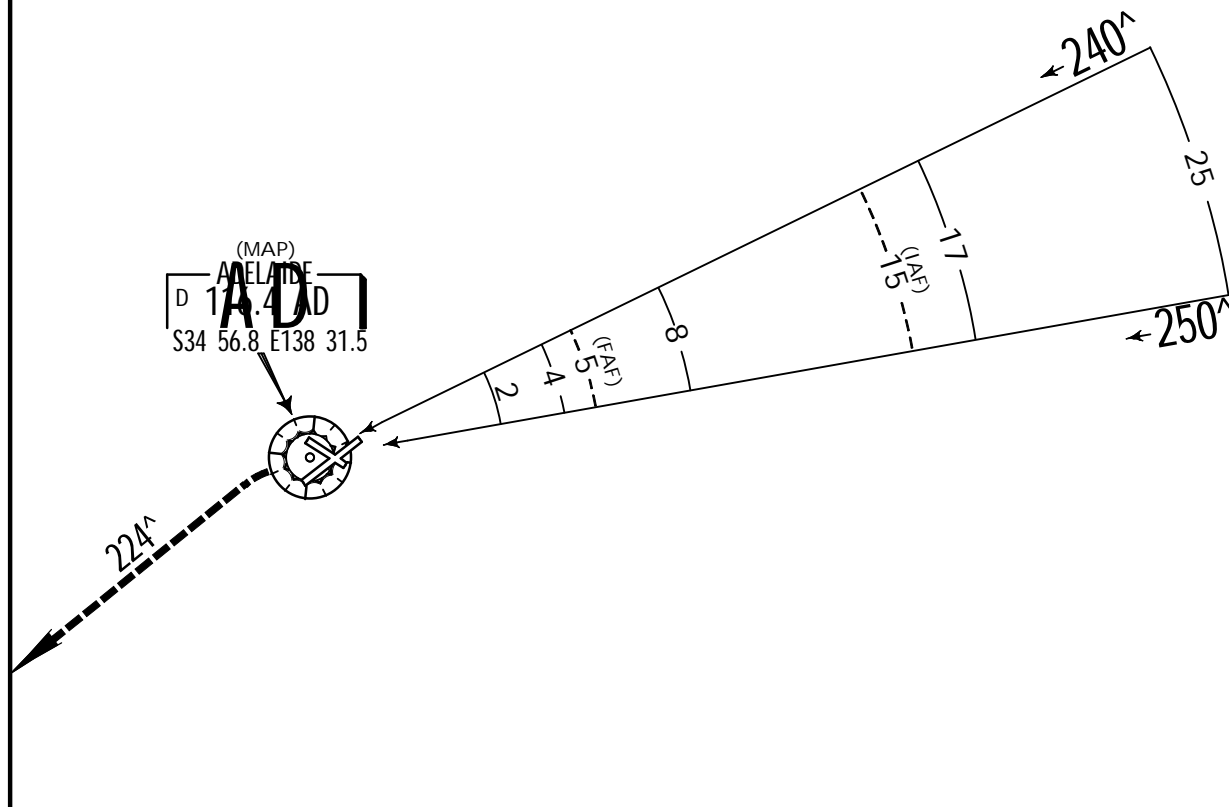

NM to VOR	0.0	1.0	2.0	3.0	4.0	5.0	6.0	6.7
ALTITUDE	1310'	1680'	2050'	2420'	2790'	3160'	3530'	3800'

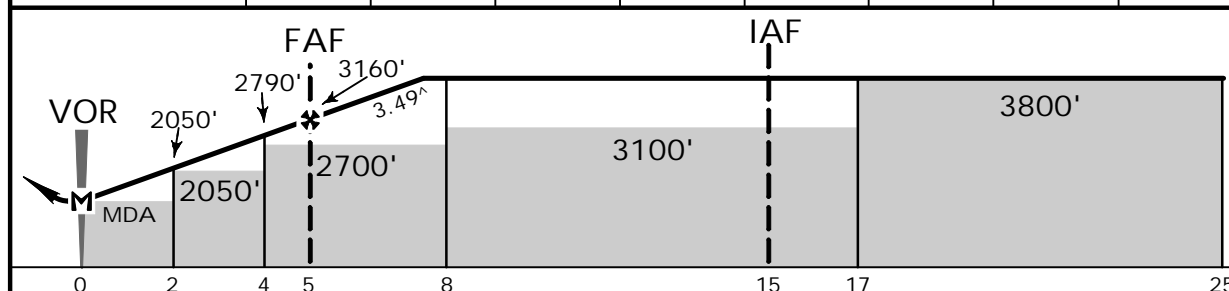


MISSED APPROACH: Turn LEFT, track 224°, climb to 1800' or as directed by ATC..

CIRCLE-TO-LAND

MDA(H) 1310'(1290')

A	2.4 km
B	4.0 km
C	5.0 km
D	

Gnd speed-Kts	70	90	100	120	140	160
Descent angle 3.49°	432	556	618	741	865	988



No Circling SOUTH
of Rwy 05-23 beyond
4 DME or beyond 3NM
of threshold of
Rwy 05-23-30.

JEPPESEN

9 MAY 14

10-2B

DME or GNSS ARRIVAL
ADELAIDE, SA, AUSTRALIA

ADELAIDE INTL

SECTOR C

ATIS 116.4 134.5

ADELAIDE Approach (R) Within 36 NM:

SE of Rwy 05-23 118.2

NW of Rwy 05-23 124.2

ADELAIDE Tower 120.5


Ground 121.7

Alt Set: hPa

Trans level: FL 110

Apt Elev: 1 hPa

Trans alt: 10000' (9980')




MSA
AD VOR
Within 25 NM
3800' Within 10 NM


VOR 116.1
Apt. Elev 20'

NOT TO SCALE

DME USING AD DME
REFERENCE WAYPOINT AD VOR

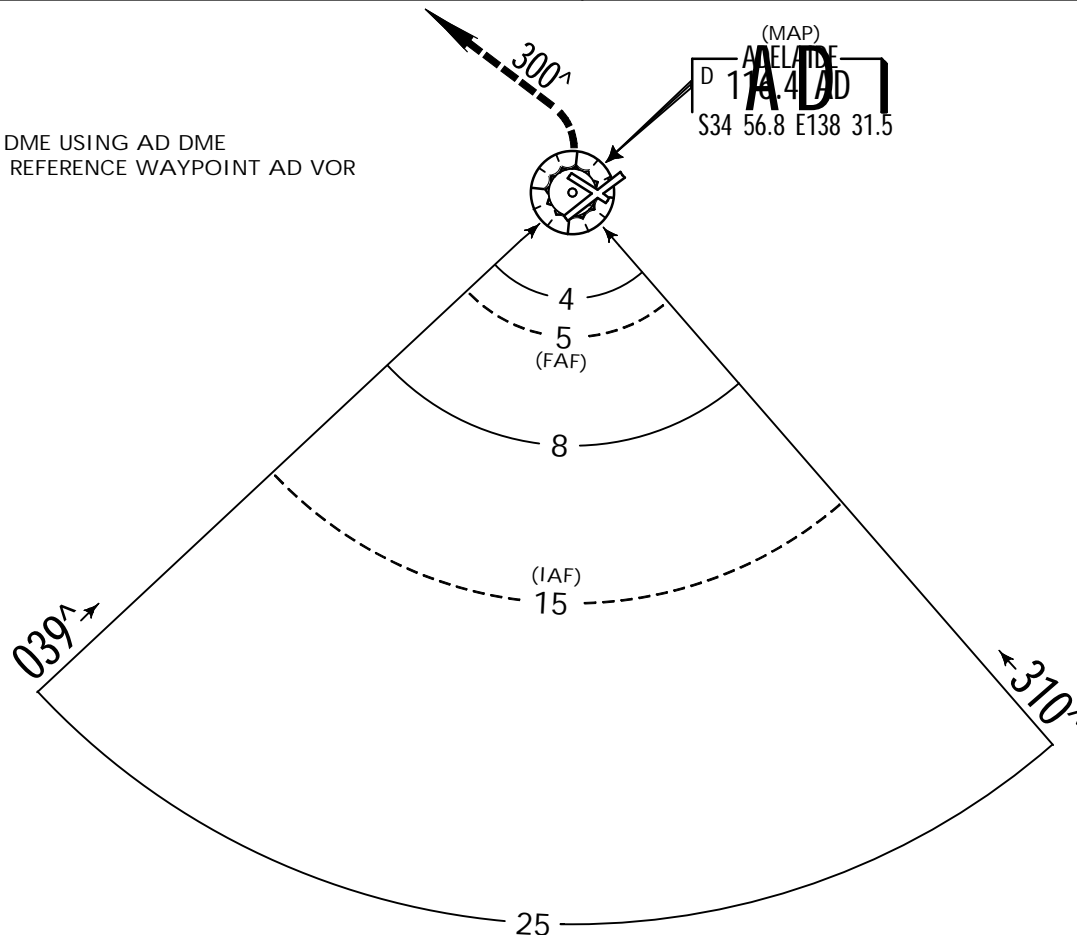

NM to VOR	8.0	7.0	6.0	5.0	4.0	3.0	2.0	1.0	0.4	0.1
ALTITUDE	3800'	3430'	3060'	2690'	2310'	1940'	1570'	1200'	1000'	900'

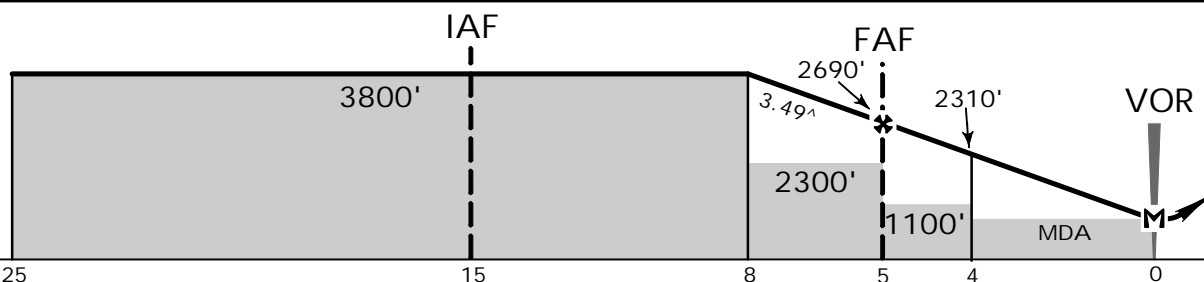

MISSED APPROACH: Turn LEFT, track 300°, climb to 1800' or as directed by ATC.


CIRCLE-TO-LAND

MDA(H) A, B: 900' (880')
C, D: 1000' (980')

A	2.4 km
B	2.4 km
C	4.0 km
D	5.0 km

VS OPS

Gnd speed-Kts	70	90	100	120	140	160
Descent angle 3.49°	432	556	618	741	865	988



No Circling SOUTH
of Rwy 05-23 beyond
4 DME or beyond 3NM
of threshold of
Rwy 05-23-30.

JEPPESEN

9 MAY 14


10-2C

DME or GNSS ARRIVAL.
ADELAIDE, SA, AUSTRALIA

ADELAIDE INTL

ATIS 116.4 134.5
ADELAIDE Approach (R) Within 36 NM:
SE of Rwy 05-23 118.2
NW of Rwy 05-23 124.2
ADELAIDE Tower 120.5
Ground 121.7

Alt Set: hPa Trans level: FL 110
Apt Elev: 1 hPa Trans alt: 10000' (9980')




MSA
AD VOR
Within 25 NM
3800' Within 10 NM

VOR 116.4 AD
Apt. Elev 20'


TBD VOR to AD VOR

DME USING AD DME
REFERENCE WAYPOINT AD VOR

NOT TO SCALE

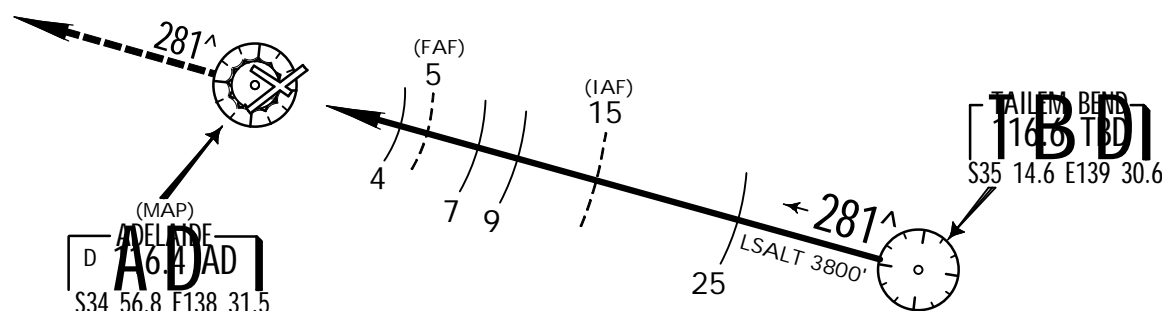

NM to AD VOR	0.0	1.0	2.0	3.0	4.0	5.0	6.0	7.0	8.1
ALTITUDE	900'	1210'	1570'	1940'	2300'	2660'	3020'	3390'	3800'

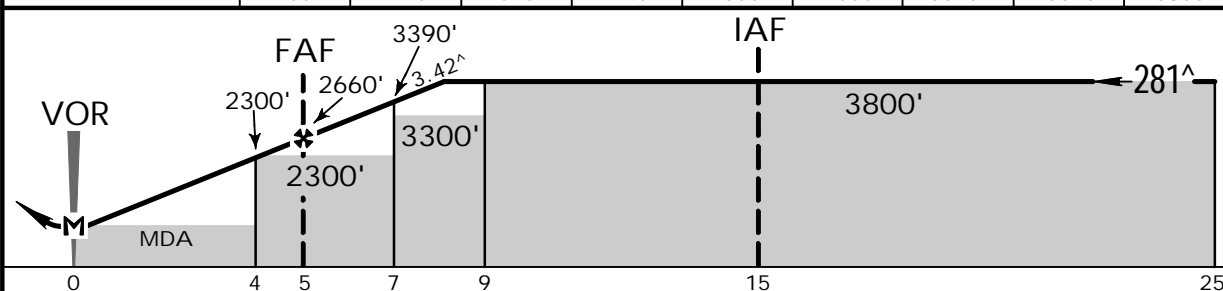


MISSED APPROACH: Track 281°, climb to 1800' or as directed by ATC.

CIRCLE-TO-LAND

MDA(H) A, B: 900' (880')
C, D: 1000' (980')

A	2.4 km
B	2.4 km
C	4.0 km
D	5.0 km

Gnd speed-Kts	70	90	100	120	140	160
Descent angle 3.42°	424	545	605	726	847	968



No Circling SOUTH
of Rwy 05-23 beyond
4 DME or beyond 3NM
of threshold of
Rwy 05-23-30.

VS OPS

JEPPESEN

10-2E

13 SEP 13
.Eff.19.Sep.

.RNAV.STAR.
ADELAIDE, SA, AUSTRALIA

ATIS 116.4 134.5

ADELAIDE Approach (R) Within 36 NM:

SE of Rwy 05-23 118.2

This procedure becomes
effective 18 SEP 1600Z

YPAD ADELAIDE INTL

TRANS LEVEL: FL 110
TRANS ALT: 10000'

JETS & DH8D ONLY

**ALEXI FIVE BRAVO [ALEX5B],
ALEXI FIVE ZULU [ALEX5Z] ARRIVALS**

SPEED: MAX IAS 250 KT BELOW 10000'


TRANSITION

DUKES: From DUKES track 285° to ALEXI.
Then follow arrival instructions.

ARRIVAL


RWY 05 BRAVO: From ALEXI turn
RIGHT, track 306° to LUNGA.
Track via 12.5 DME Arc for VOR
RWY 05.

RWY 05 ZULU: From ALEXI turn
RIGHT, track 306° to PADSD.
Turn RIGHT, track via RNAV-Z
(GNSS) RWY 05.



MSA AD VOR
3800'
within 10 NM

GNSS permitted in lieu of DME
Reference waypoint AD VOR

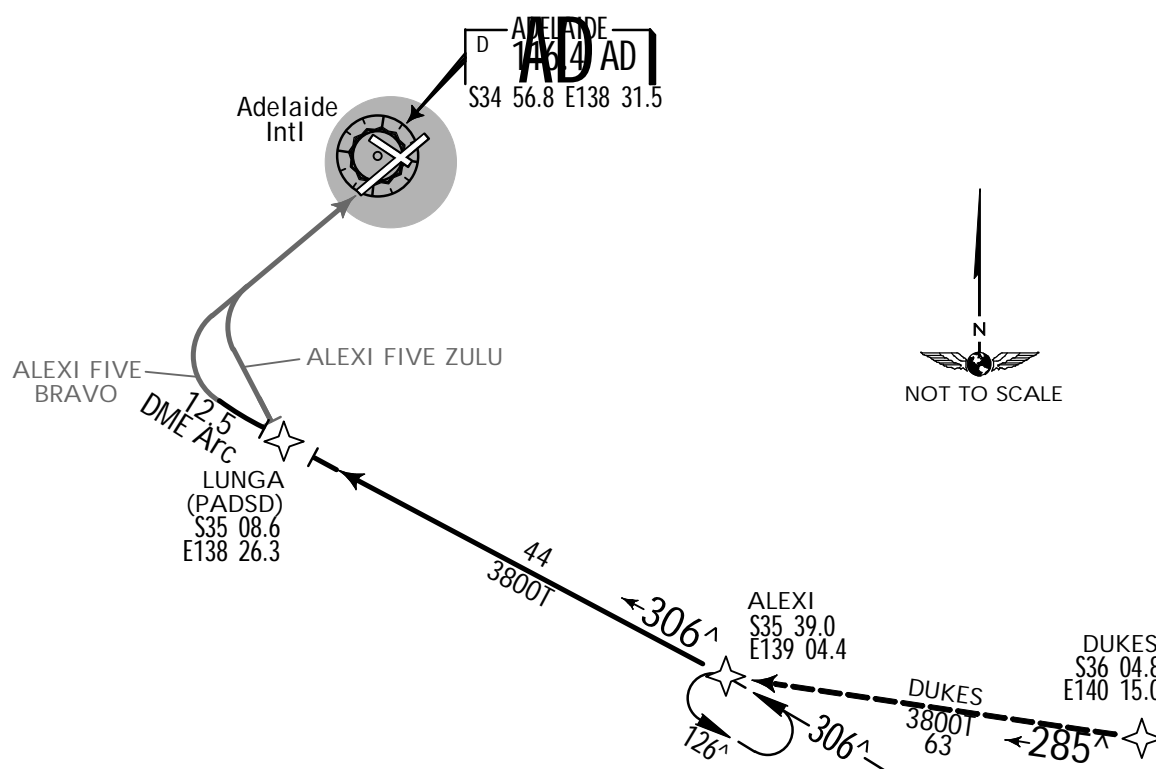

Direct distance to Adelaide Intl from:
LUNGA (PADSD) 13 NM

COMMS ▼ LOST COMMS ▼ LOST COMMS ▼ LOST COMMS ▼ LOST COMMS ▼ LOST COMMS ▼ LOST COMMS ▼ LOST COMMS ▼ LOST COMMS ▼

LOST
COMMS
▼

COMMUNICATIONS FAILURE: PROCEDURE IN IMC
IF ABLE CONTACT ADELAIDE APPROACH ON TELEPHONE: (08) 8238-7992
Squawk 7600.
Comply with vertical navigation requirements, but not below MSA.
Track via the latest STAR clearance to the nominated runway, then fly the most suitable

LOST
COMMS
▼

JEPPESSEN

10-2F

13 SEP 13
.Eff.19.Sep.

.RNAV.STAR.
ADELAIDE, SA, AUSTRALIA

ATIS 116.4 134.5

ADELAIDE Approach (R) Within 36 NM:

SE of Rwy 05-23 118.2

This procedure becomes
effective 18 SEP 1600Z

YPAD ADELAIDE INTL

TRANS LEVEL: FL 110
TRANS ALT: 10000'

JETS ONLY

ALEXI FIVE MIKE ARRIVAL [ALEX5M]


SPEED: MAX IAS 250 KT BELOW 10000'

TRANSITION


DUKES: From DUKES track 285° to ALEXI.
Then follow arrival instructions.

ARRIVAL


RWY 05: From ALEXI turn RIGHT,
track 306° to RIDMA. Track via
RNAV-M (RNP) RWY 05.



MSA AD VOR
3800'
within 10 NM

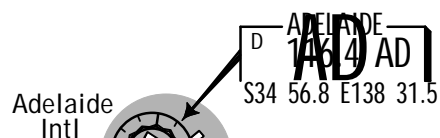

GNSS permitted in lieu of DME
Reference waypoint AD VOR

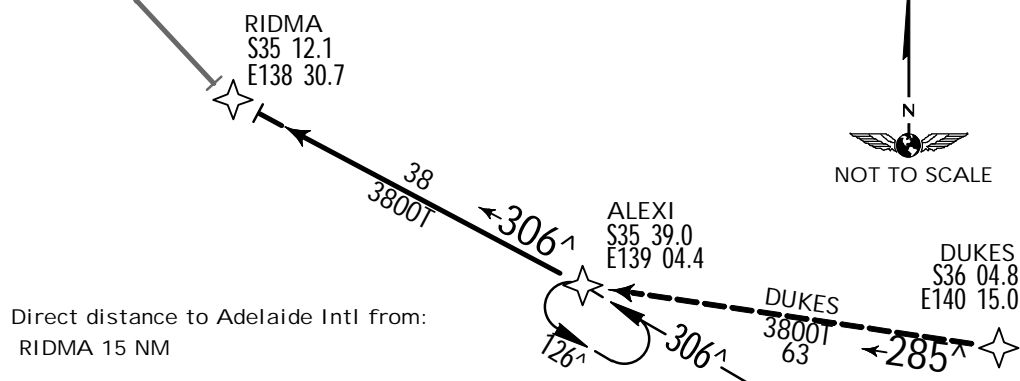

COMMS ▼ LOST COMMS ▼ LOST COMMS ▼ LOST COMMS ▼ LOST COMMS ▼ LOST COMMS ▼ LOST COMMS ▼ LOST COMMS ▼ LOST COMMS ▼

COMMUNICATIONS FAILURE: PROCEDURE IN IMC
IF ABLE CONTACT ADELAIDE APPROACH ON TELEPHONE: (08) 8238-7992

Squawk 7600.
Comply with vertical navigation requirements, but not below MSA.
Track via the latest STAR clearance to the nominated runway, then fly the most suitable


JEPPESSEN

(10-2G)

13 SEP 13
Eff. 19 Sep.

RNAV STAR

JeppView 3.6.2.0

ATIS	116.4	134.5
------	-------	-------

ADELAIDE Approach (R) Within 36 NM:

SE of Rwy 05-23 118.2

This procedure becomes effective 18 SEP 1600Z

YPAD ADELAIDE INTL

TRANS LEVEL: FL 110
TRANS ALT: 10000'

JETS & DH8D ONLY

ALEXI FIVE VICTOR ARRIVAL


[ALEX5V]

SPEED: MAX IAS 250 KT BELOW 10000'

TRANSITION


DUKES: From DUKES track 285^ to ALEXI.
Then follow arrival instructions.

RWY 05: From ALEXI turn RIGHT, track 306° to ANVAC. Turn RIGHT, track 319° to SANAV. Turn RIGHT, track 010° VISUAL to BITON. Turn RIGHT, intercept VISUAL final RWY 05.



MSA AD VOR
3800'
within 10 NM

GNSS permitted in lieu of DME
Reference waypoint AD VOR

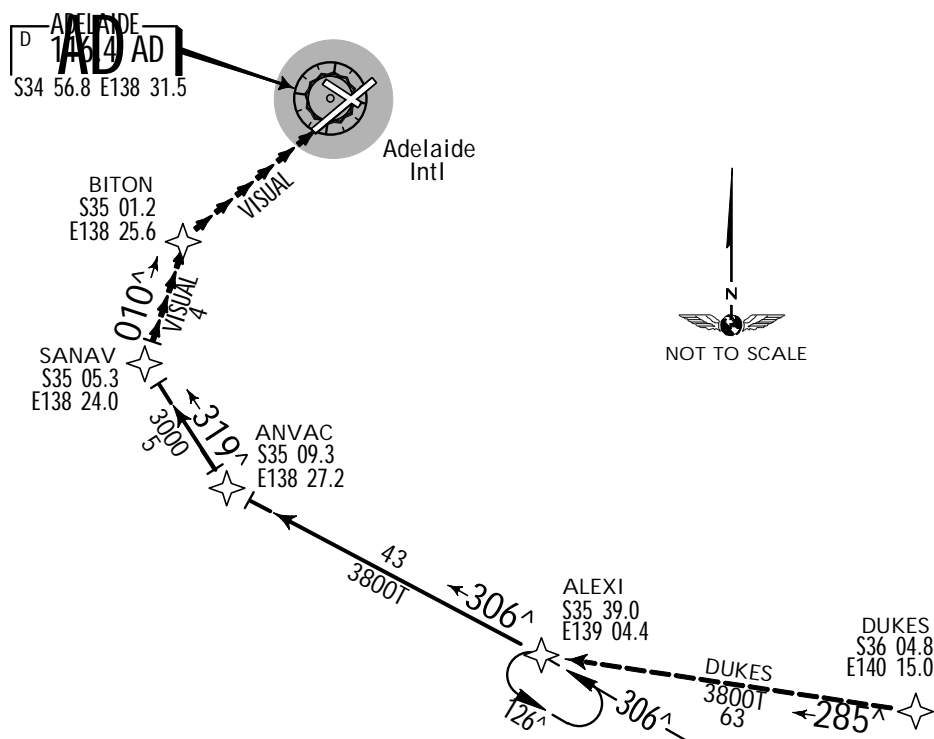

Direct distance to Adelaide Intl from:
BITON 7 NM

COMMS ▼ LOST COMMS ▼ LOST COMMS ▼ LOST COMMS ▼ LOST COMMS ▼ LOST COMMS ▼ LOST COMMS ▼ LOST COMMS ▼ LOST COMMS

COMMUNICATIONS FAILURE: PROCEDURE IN IMC

IF ABLE CONTACT ADELAIDE APPROACH ON TELEPHONE: (08) 8238-7992

Squawk 7600.

Comply with vertical navigation requirements, but not below MSA.

Track via the latest STAR clearance to the nominated runway, then fly the most suitable approach in accordance with EMERGENCY PROCEDURES.

CHANGES: Procedure revised, renumbered, reindexed.

| JEPPESEN, 2013. ALL RIGHTS RESERVED.

JEPPESSEN

(10-2H)

13 SEP 13
 .Eff.19.Sep.

.RNAV.STAR.

ADELAIDE, SA, AUSTRALIA

ATIS	116.4	134.5
------	-------	-------

ADELAIDE Approach (R) Within 36 NM:

SE of Rwy 05-23	118.2
-----------------	-------

YPAD ADELAIDE INTL

TRANS LEVEL: FL 110
TRANS ALT: 10000'

NON-JETS ONLY
ATPIP ONE ARRIVAL
[ATPIP1]

SPEED: MAX IAS 250 KT BELOW 10000'

ARRIVAL


ALL RWYS:

From ATPIP track 319^ to KASBU.


Cross KASBU at or below 5000'.

Track 319^ to AD VOR.

EXPECT RADAR vectors to final approach.



MSA AD VOR
3800'
within 10 NM

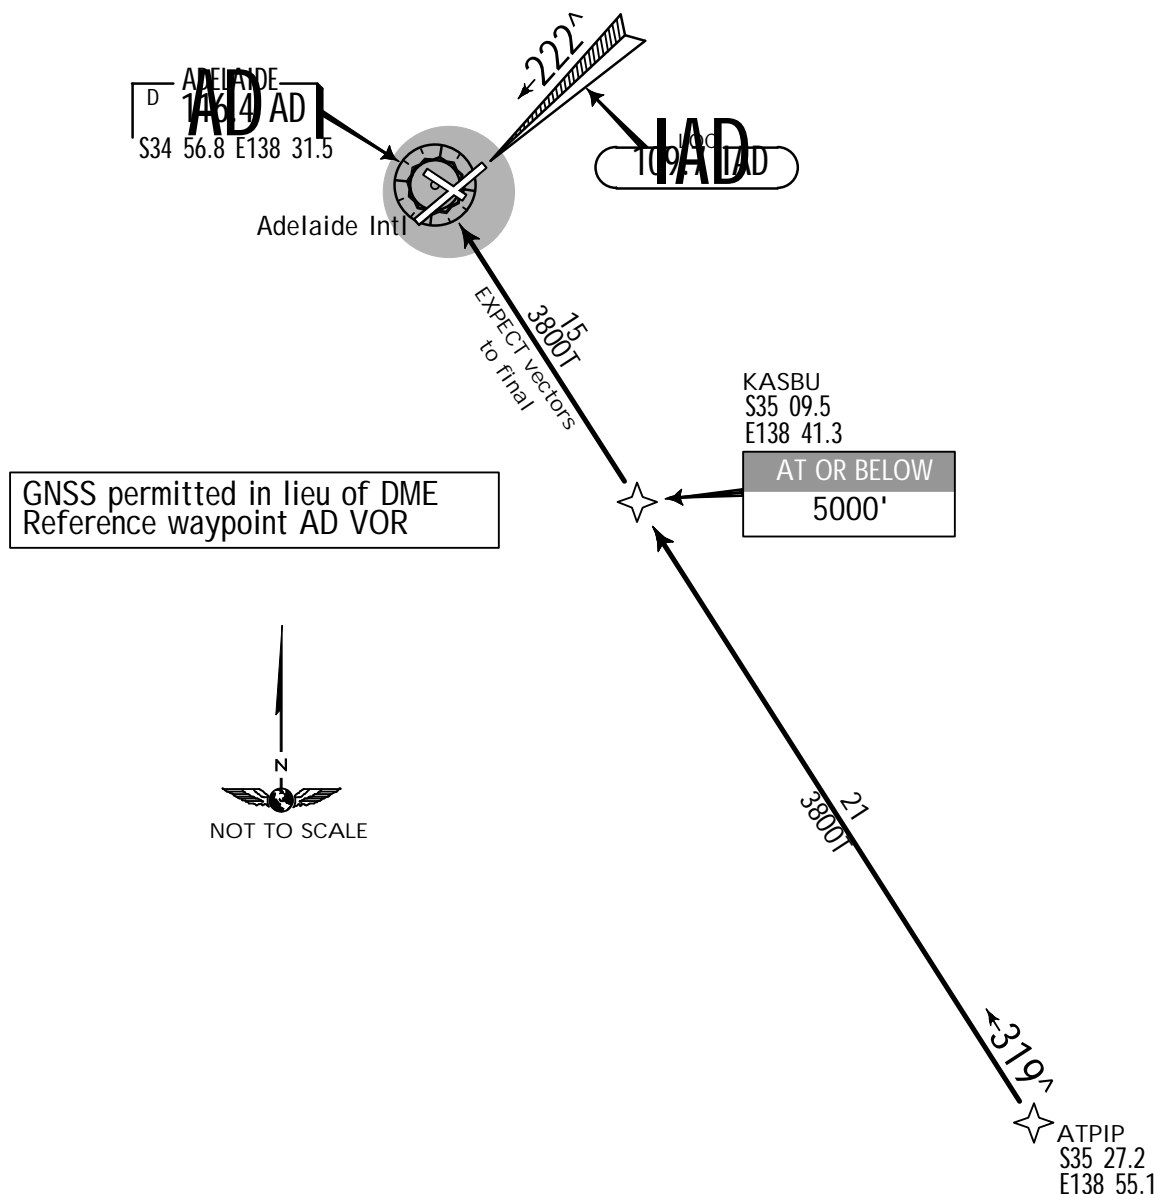

COMMS ▼ LOST COMMS ▼ LOST COMMS ▼ LOST COMMS ▼ LOST COMMS ▼ LOST COMMS ▼ LOST COMMS ▼ LOST COMMS ▼ LOST COMMS

COMMUNICATIONS FAILURE: PROCEDURE IN IMC
IF ABLE CONTACT ADELAIDE APPROACH ON TELEPHONE: (08) 8238-7992

Track via the latest STAR clearance to the nominated runway, then fly the most suitable

JEPPESEN

10-2J

13 SEP 13
Eff. 19 Sep.

.RNAV.STAR.

ADELAIDE, SA, AUSTRALIA

ATIS 116.4 134.5

ADELAIDE Approach (R) Within 36 NM:

SE of Rwy 05-23 118.2

This procedure becomes
effective 18 SEP 1600Z

YPAD ADELAIDE INTL

TRANS LEVEL: FL 110
TRANS ALT: 10000'

JET & DH8D ONLY

**BLACK THREE ALPHA [BLAC3A],
BLACK THREE BRAVO [BLAC3B],
BLACK THREE ZULU [BLAC3Z]
ARRIVALS**

SPEED: MAX IAS 250 KT BELOW 10000'



ARRIVALS

RWY 05 BRAVO: From BLACK track 237° to LUNGA. Turn RIGHT, track via 12.5 DME Arc for VOR RWY 05.

RWY 05 ZULU: From BLACK track 237° to PADSD. Turn RIGHT, track via RNAV-Z (GNSS) RWY 05.

RWY 23 ALPHA: From BLACK track 260° to PLEZN. Cross PLEZN at or below 9000'. Track 260° to KERRS. Cross KERRS at or above 5000'. Track 260° to GULLY. Turn LEFT, track 222° to MBY. Intercept LOC RWY 23.

GNSS permitted in lieu of DME
Reference waypoint AD VOR

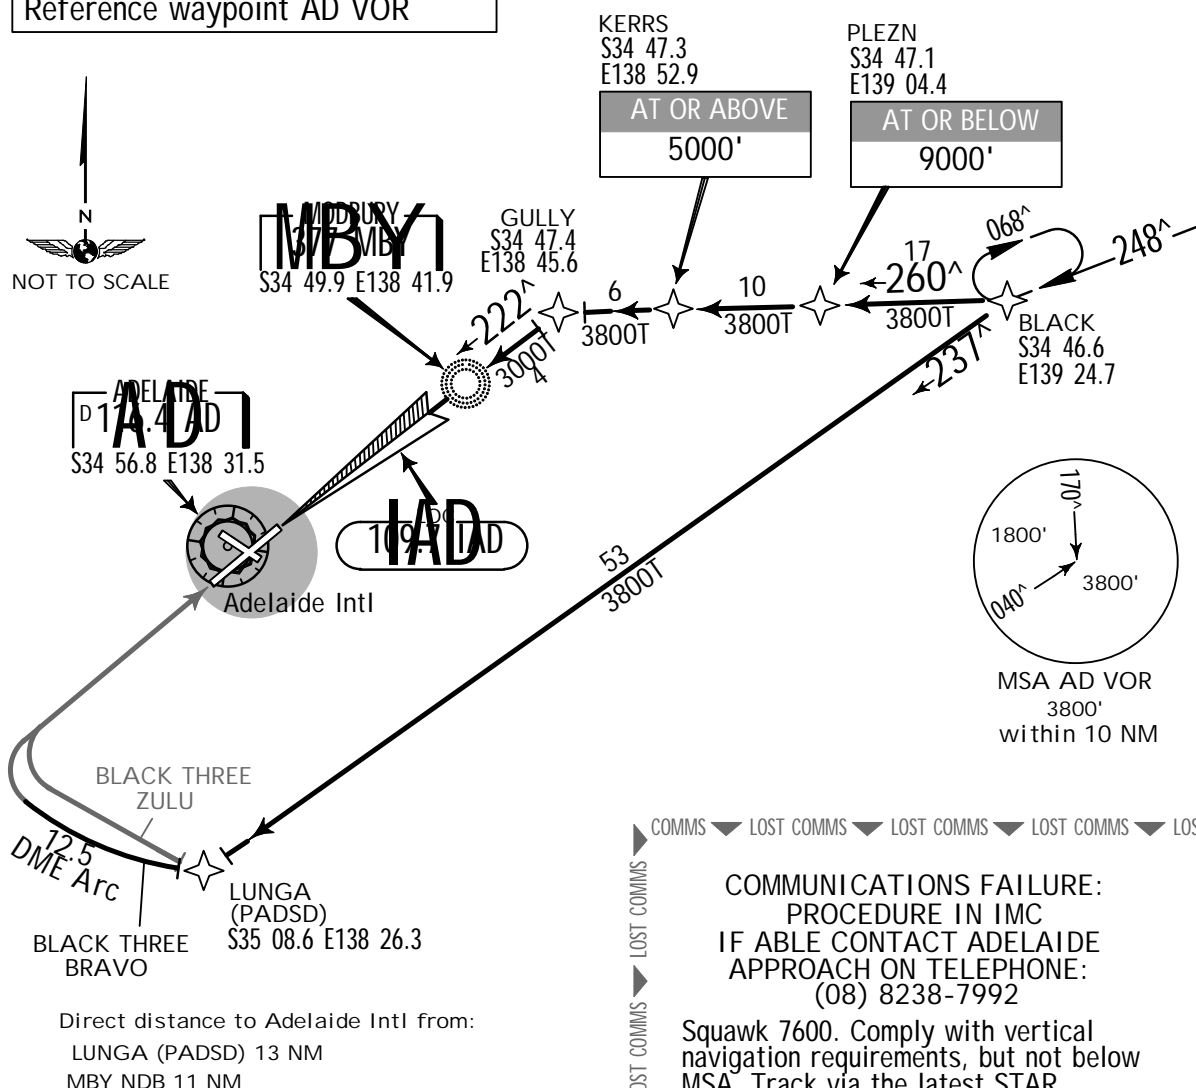

COMMS ▼ LOST COMMS ▼ LOST COMMS ▼ LOST COMMS ▼ LOST

**COMMUNICATIONS FAILURE:
PROCEDURE IN IMC
IF ABLE CONTACT ADELAIDE
APPROACH ON TELEPHONE:
(08) 8238-7992**

Squawk 7600. Comply with vertical
navigation requirements, but not below
MSA. Track via the latest STAR
clearance to the nominated runway,
then fly the most suitable approach in
accordance with EMERGENCY

LOST COMMS ▼ LOST COMMS ▼ LOST COMMS ▼ LOST COMMS ▼ LOST

LOST COMMS ▼ LOST COMMS ▼ LOST COMMS ▼ LOST COMMS ▼ LOST

JEPPESEN

10-2K

13 SEP 13
.Eff. 19.Sep.

.RNAV.STAR.

ATIS 116.4 134.5

ADELAIDE Approach (R) Within 36 NM:

SE of Rwy 05-23 118.2

This procedure becomes
effective 18 SEP 1600Z

ADELAIDE, SA, AUSTRALIA

YPAD ADELAIDE INTL

TRANS LEVEL: FL 110
TRANS ALT: 10000'

JETS ONLY


BLACK THREE MIKE [BLAC3M], BLACK THREE UNIFORM [BLAC3U] ARRIVALS

SPEED: MAX IAS 250 KT BELOW 10000'

ARRIVALS

RWY 05 MIKE: From BLACK track
237° to TAXES. Track via RNAV-M
(RNP) RWY 05.


RWY 23 UNIFORM: From BLACK track
260° to PLEZN. Cross PLEZN at or
below 9000'. Track 260° to KERRS.
Cross KERRS at or above 5000'.
Track 260° to GULLY. Track via
RNAV-U (RNP) RWY 23.



MSA AD VOR
3800'
within 10 NM

GNSS permitted in lieu of DME
Reference waypoint AD VOR

Direct distance to Adelaide Intl from:
GULLY 15 NM
TAXES 9 NM

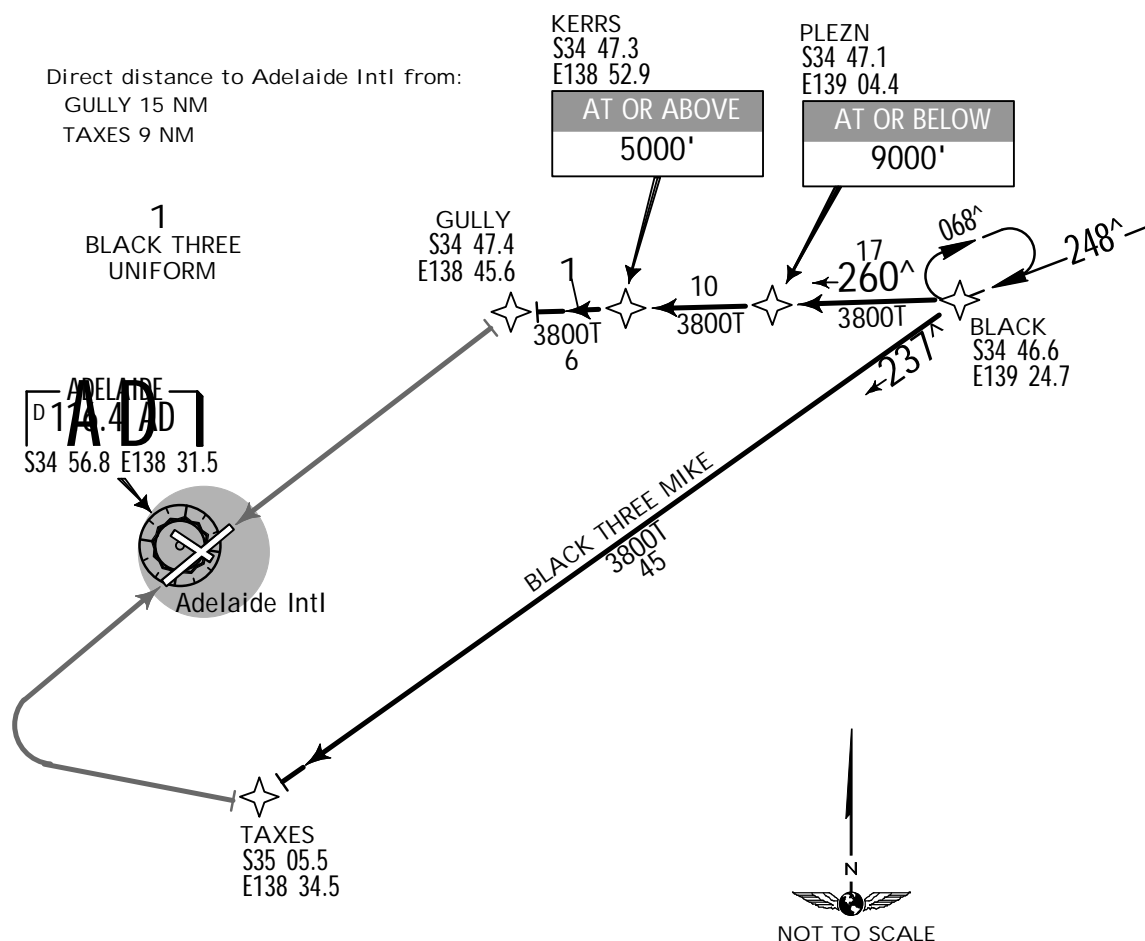

COMMS ▼ LOST COMMS ▼ LOST COMMS ▼ LOST COMMS ▼ LOST COMMS ▼ LOST COMMS ▼ LOST COMMS ▼ LOST COMMS ▼ LOST COMMS ▼ LOST COMMS ▼

LOST
COMMS
▼

COMMUNICATIONS FAILURE: PROCEDURE IN IMC
IF ABLE CONTACT ADELAIDE APPROACH ON TELEPHONE: (08) 8238-7992
Squawk 7600.
Comply with vertical navigation requirements, but not below MSA.
Track via the latest STAR clearance to the nominated runway, then fly the most suitable

LOST
COMMS
▼

JEPPESEN

10-2L

13 SEP 13
.Eff.19.Sep.

.RNAV.STAR.

ATIS 116.4 134.5

ADELAIDE Approach (R) Within 36 NM:

SE of Rwy 05-23 118.2

ADELAIDE, SA, AUSTRALIA

This procedure becomes
effective 18 SEP 1600Z

YPAD ADELAIDE INTL

TRANS LEVEL: FL 110
TRANS ALT: 10000'

JET & DH8D ONLY


BLACK THREE VICTOR ARRIVAL

[BLAC3V]

SPEED: MAX IAS 250 KT BELOW 10000'

ARRIVAL


RWY 05: From BLACK track 237° to STANZ. Turn RIGHT, track 283° to SANAV. Turn RIGHT, track 010° VISUAL to BITON. Turn RIGHT, intercept VISUAL final to RWY 05.



MSA AD VOR
3800'
within 10 NM

GNSS permitted in lieu of DME
Reference waypoint AD VOR

Direct distance to Adelaide Intl from:
BITON 7 NM

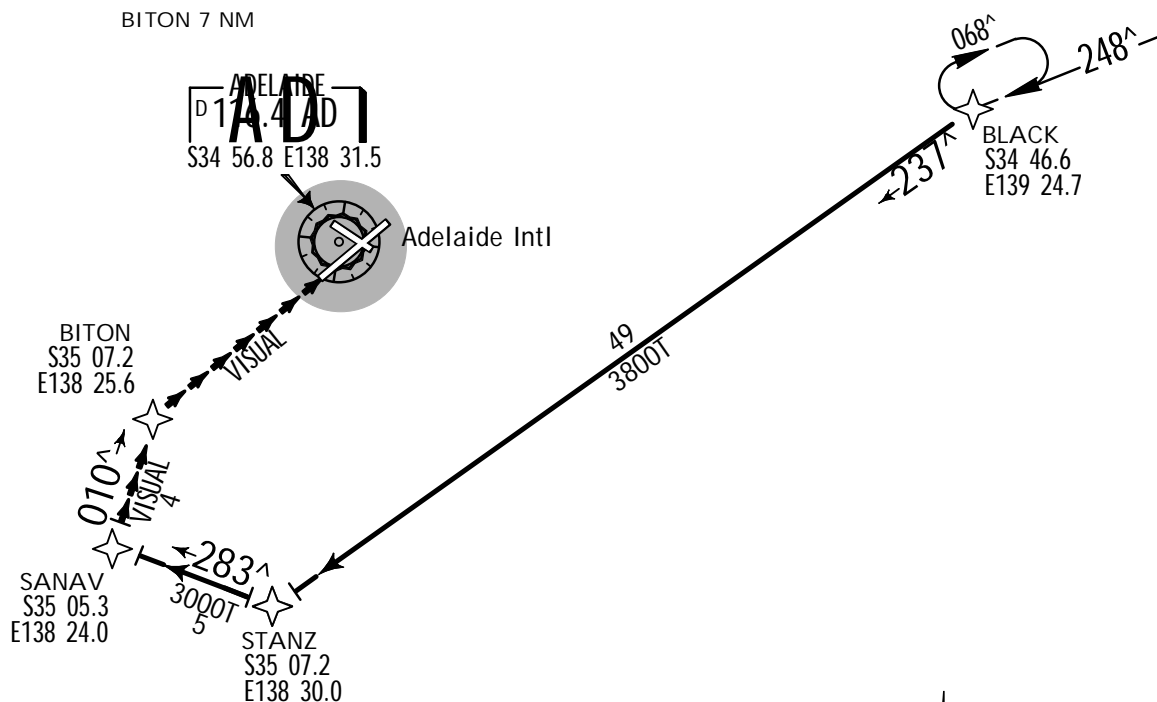

COMMS ▼ LOST COMMS ▼ LOST COMMS ▼ LOST COMMS ▼ LOST COMMS ▼ LOST COMMS ▼ LOST COMMS ▼ LOST COMMS ▼ LOST COMMS ▼

LOST
COMMS
▼

COMMUNICATIONS FAILURE: PROCEDURE IN IMC
IF ABLE CONTACT ADELAIDE APPROACH ON TELEPHONE: (08) 8238-7992
Squawk 7600.
Comply with vertical navigation requirements, but not below MSA.
Track via the latest STAR clearance to the nominated runway, then fly the most suitable

LOST
COMMS
▼

JEPPESEN

10-2M

13 SEP 13
.Eff.19.Sep.

.RNAV.STAR.

ADELAIDE, SA, AUSTRALIA

ATIS 116.4 134.5

ADELAIDE Approach (R) Within 36 NM:

SE of Rwy 05-23 118.2

This procedure becomes
effective 18 SEP 1600Z

YPAD ADELAIDE INTL

TRANS LEVEL: FL 110
TRANS ALT: 10000'


JETS & DH8D ONLY
DRINA FOUR ALPHA ARRIVAL
[DRIN4A]

SPEED: MAX IAS 250 KT BELOW 10000'

ARRIVAL


From DRINA track 331° to COMLY.
Cross COMLY at or below FL130.
Track 331° to DISHA. Turn LEFT,
track 309° to BRAKI. Cross BRAKI
at or below 9000'. Track 309° to
GULLY. Turn LEFT, track 222° to MBY.
Then:

RWY 23: Intercept LOC RWY 23.



MSA AD VOR
3800'
within 10 NM

GNSS permitted in lieu of DME
Reference waypoint AD VOR

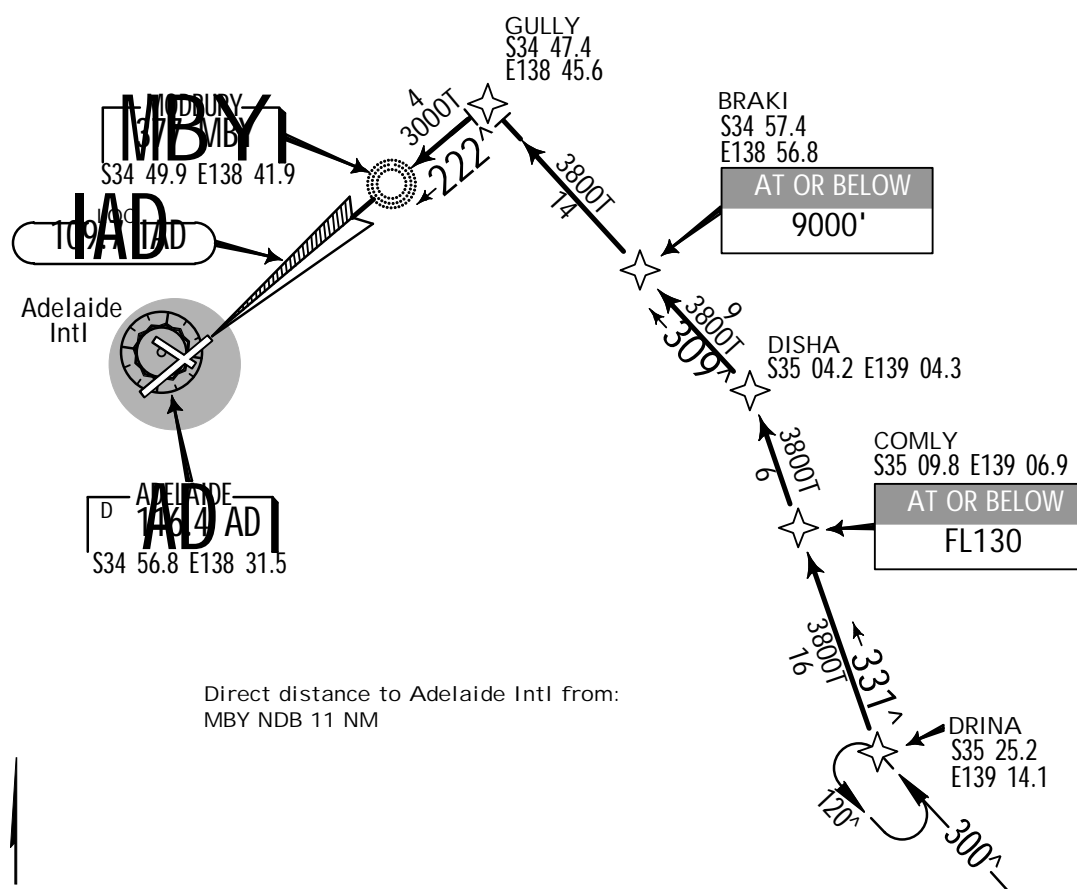

Direct distance to Adelaide Intl from:
MBY NDB 11 NM



COMMS ► LOST COMMS ► LOST COMMS ► LOST COMMS ► LOST COMMS ► LOST COMMS ► LOST COMMS ► LOST COMMS ► LOST COMMS ► LOST COMMS ►

COMMUNICATIONS FAILURE: PROCEDURE IN IMC
IF ABLE CONTACT ADELAIDE APPROACH ON TELEPHONE: (08) 8238-7992
Squawk 7600.
Comply with vertical navigation requirements, but not below MSA.
Track via the latest STAR clearance to the nominated runway, then fly the most suitable

JEPPESEN

10-2N

13 SEP 13
.Eff.19.Sep.

.RNAV.STAR.
ADELAIDE, SA, AUSTRALIA

ATIS 116.4 134.5
ADELAIDE Approach (R) Within 36 NM:
SE of Rwy 05-23 118.2

This procedure becomes
effective 18 SEP 1600Z

YPAD ADELAIDE INTL

TRANS LEVEL: FL 110
TRANS ALT: 10000'

JETS ONLY

DRINA FOUR MIKE [DRIN4M], DRINA FOUR UNIFORM [DRIN4U] ARRIVALS


SPEED: MAX IAS 250 KT BELOW 10000'

ARRIVAL

From DRINA track 331° to COMLY.
Cross COMLY at or below FL130.
Track 331° to DISHA. Turn LEFT,
track 309° to BRAKI. Cross BRAKI
at or below 9000'.


RWY 23 MIKE: Turn LEFT, track 293°
to DALBU. Track RNAV-M (RNP) RWY 23.

RWY 23 UNIFORM: Track 309° to GULLY.
Track via RNAV-U (RNP) RWY 23.



MSA AD VOR
3800'
within 10 NM

GNSS permitted in lieu of DME
Reference waypoint AD VOR

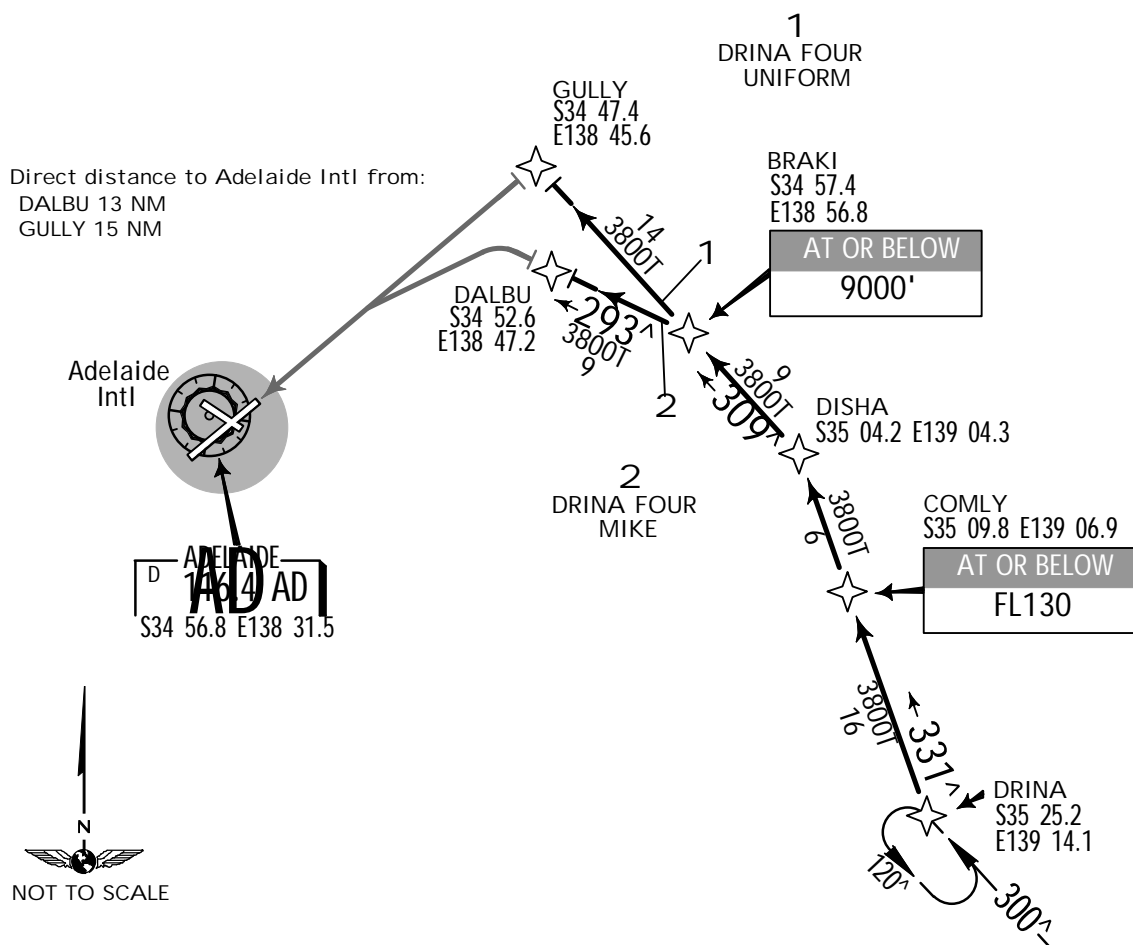

COMMS ► LOST COMMS ► LOST COMMS ► LOST COMMS ► LOST COMMS ► LOST COMMS ► LOST COMMS ► LOST COMMS ► LOST COMMS ► LOST COMMS ►

COMMUNICATIONS FAILURE: PROCEDURE IN IMC
IF ABLE CONTACT ADELAIDE APPROACH ON TELEPHONE: (08) 8238-7992

Squawk 7600.
Comply with vertical navigation requirements, but not below MSA.
Track via the latest STAR clearance to the nominated runway, then fly the most suitable

JEPPESSEN

10-2P

13 SEP 13
.Eff.19.Sep.

.RNAV.STAR.
ADELAIDE, SA, AUSTRALIA

ATIS 116.4 134.5
ADELAIDE Approach (R) Within 36 NM:
SE of Rwy 05-23 118.2

This procedure becomes
effective 18 SEP 1600Z

YPAD ADELAIDE INTL


TRANS LEVEL: FL 110
TRANS ALT: 10000'

JETS & DH8D ONLY
DRINA FOUR VICTOR ARRIVAL
[DRIN4V]

SPEED: MAX IAS 250 KT BELOW 10000'


ARRIVAL

RWY 23: From DRINA track 331° to COMLY. Cross COMLY at or below FL130. Track 331° to DISHA. Turn LEFT, track 309° to BRAKI. Cross BRAKI at or below 9000'. Turn LEFT, track 293° to MBY NDB. Turn LEFT, intercept VISUAL final RWY 23.



MSA AD VOR
3800'
within 10 NM

GNSS permitted in lieu of DME
Reference waypoint AD VOR

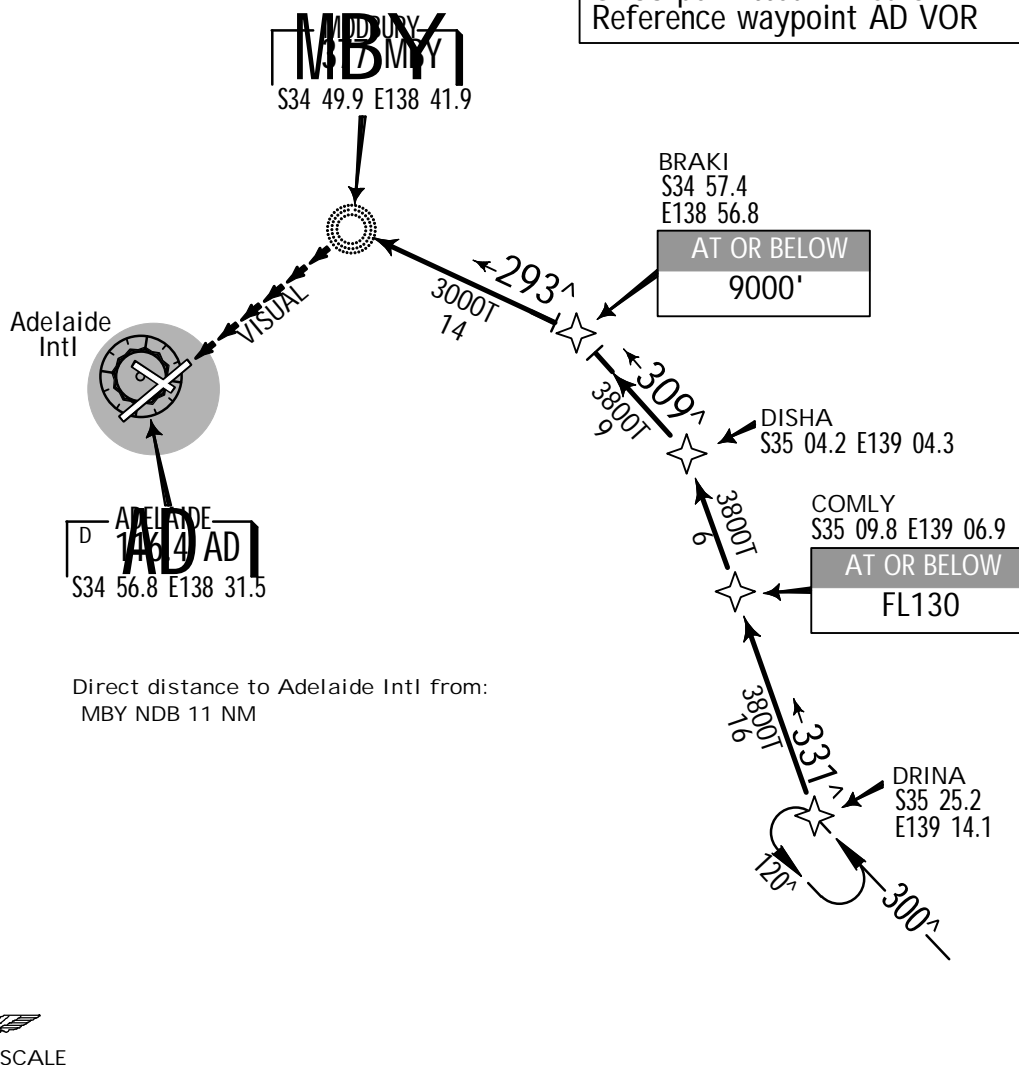

NOT TO SCALE

COMMS ► LOST COMMS ► LOST COMMS ► LOST COMMS ► LOST COMMS ► LOST COMMS ► LOST COMMS ► LOST COMMS ► LOST COMMS ► LOST COMMS ►

COMMUNICATIONS FAILURE: PROCEDURE IN IMC
IF ABLE CONTACT ADELAIDE APPROACH ON TELEPHONE: (08) 8238-7992
Squawk 7600.
Comply with vertical navigation requirements, but not below MSA.
Track via the latest STAR clearance to the nominated runway, then fly the most suitable

JEPPESEN

10-20

13 SEP 13
.Eff.19.Sep.

.RNAV.STAR.
ADELAIDE, SA, AUSTRALIA

ATIS 116.4 134.5
ADELAIDE Approach (R) Within 36 NM:
NW of Rwy 05-23 124.2

YPAD ADELAIDE INTL

TRANS LEVEL: FL 110
TRANS ALT: 10000'

NON-JETS ONLY
ELROX ONE ARRIVAL
[ELROX1]

SPEED: MAX IAS 250 KT BELOW 10000'

ARRIVAL

From ELROX track 042° to TROUB.
Cross TROUB at or above 5000'.
Track 042° to RUDIE.
Cross RUDIE at or below 4000'.

RWY 05 VICTOR:

From RUDIE turn RIGHT, track 085°
to COLPY. Turn LEFT, track 042°
VISUAL for final RWY 05.


RWY 12 VICTOR:

From RUDIE track 038° to MULDR.
Turn RIGHT, track 115° VISUAL for
final RWY 12.

RWY 23 VICTOR:

From RUDIE track 042° to PORTA.
Turn RIGHT, track 132° VISUAL
to intercept final RWY 23.


NOTE: When instrument approach
required, EXPECT RADAR vectors after
RUDIE to IAF for appropriate
instrument approach.



MSA AD VOR
3800'
within 10 NM

Direct distance to Adelaide Intl from:
COLPY 8 NM
PORTA 6 NM

GNSS permitted in lieu of DME
Reference waypoint AD VOR

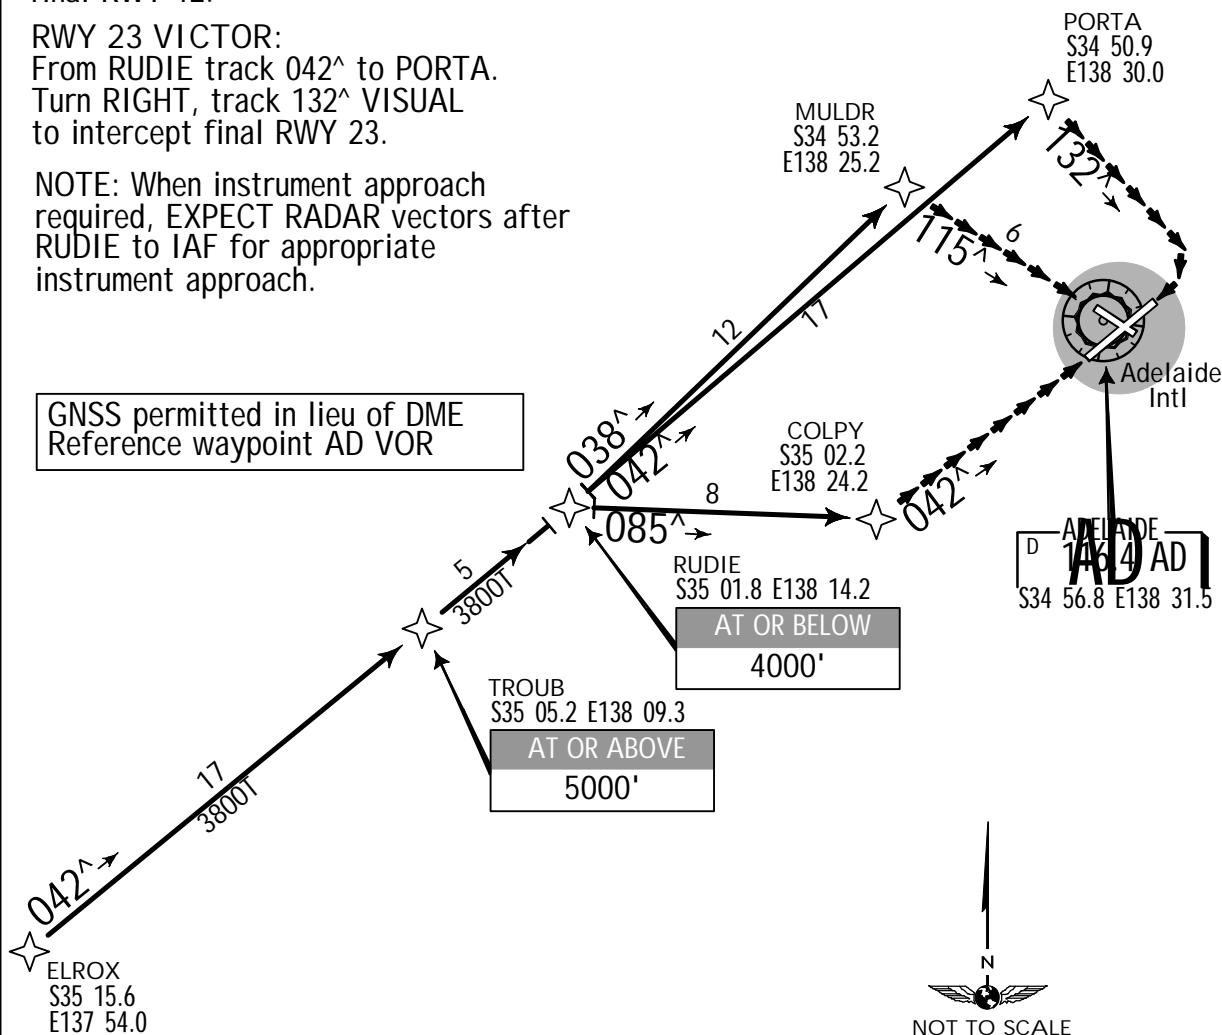

COMMS ▼ LOST COMMS ▼ LOST COMMS ▼ LOST COMMS ▼ LOST COMMS ▼ LOST COMMS ▼ LOST COMMS ▼ LOST COMMS ▼ LOST COMMS ▼

COMMUNICATIONS FAILURE: PROCEDURE IN IMC
IF ABLE CONTACT ADELAIDE APPROACH ON TELEPHONE: (08) 8238-7992
Squawk 7600.
Comply with vertical navigation requirements, but not below MSA.
Track via the latest STAR clearance to the nominated runway, then fly the most suitable

JEPPESEN

10-2S

13 SEP 13
Eff. 19 Sep.

.RNAV.STAR.
ADELAIDE, SA, AUSTRALIA

ATIS 116.4 134.5
ADELAIDE Approach (R) Within 36 NM:
NW of Rwy 05-23 124.2

YPAD ADELAIDE INTL


TRANS LEVEL: FL 110
TRANS ALT: 10000'

NON-JETS ONLY
GULFS FOUR ARRIVAL
[GULFS4]

SPEED: MAX IAS 250 KT BELOW 10000'

TRANSITION

RIKAB: From RIKAB to GULFS:
Track 099° to GULFS.
Then follow arrival instructions.

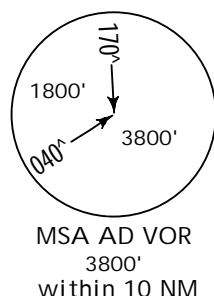

ARRIVAL


Cross GULFS at or below 7000'.

RWY 05 VICTOR:
From GULFS track 109° to VINCN.
Track 109° VISUAL to intercept final
RWY 05.

RWY 12 VICTOR:
From GULFS track 090° to MULDR.
Turn RIGHT, track 115° VISUAL for final
RWY 12.

RWY 23 VICTOR:
From GULFS track 081° to PORTA.
Turn RIGHT, track 132° VISUAL to
intercept final RWY 23.

NOTE: When instrument approach
required, EXPECT RADAR vectors after
GULFS to IAF for appropriate
instrument approach.

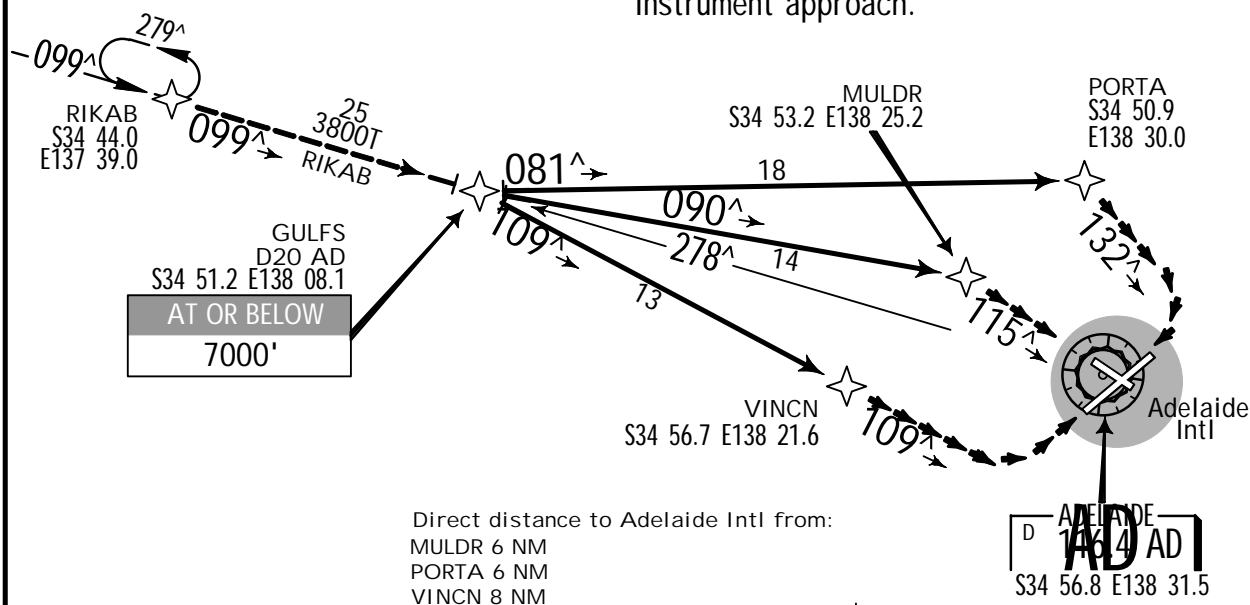

GNSS permitted in lieu of DME
Reference waypoint AD VOR

COMMS LOST COMMS LOST COMMS LOST COMMS LOST COMMS LOST COMMS LOST COMMS LOST COMMS LOST COMMS

COMMUNICATIONS FAILURE: PROCEDURE IN IMC
IF ABLE CONTACT ADELAIDE APPROACH ON TELEPHONE: (08) 8238-7992
Squawk 7600.
Comply with vertical navigation requirements, but not below MSA.
Track via the latest STAR clearance to the nominated runway, then fly the most suitable

JEPPESEN

10-2T

13 SEP 13
.Eff. 19. Sep.

.RNAV.STAR.

ADELAIDE, SA, AUSTRALIA

ATIS 116.4 134.5

ADELAIDE Approach (R) Within 36 NM:

NW of Rwy 05-23 124.2

YPAD ADELAIDE INTL

TRANS LEVEL: FL 110
TRANS ALT: 10000'**NON-JETS ONLY****PAMMY THREE ARRIVAL**
[PAMMY3]**SPEED:** MAX IAS 250 KT BELOW 10000'**TRANSITIONS**

ARDROSSAN (ARS): From ARS VOR to PAMMY: Via ARS R-130 to ROGUE. From ROGUE track 117° to PAMMY. Then follow arrival instructions.

MARGO: From MARGO to PAMMY: Track 135° to PAMMY. Then follow arrival instructions.

ARRIVAL

Cross PAMMY at or below 7000'.

RWY 05 VICTOR:

From PAMMY track 165° to VINCN. Turn LEFT, track 109° VISUAL to intercept final RWY 05.


RWY 12 VICTOR:

From PAMMY track 146° to MULDR. Turn LEFT, track 115° VISUAL for final RWY 12.

RWY 23 VICTOR:

From PAMMY track 121° to PORTA. Turn RIGHT, track 132° VISUAL to intercept final RWY 23.

NOTE: When instrument approach required, EXPECT RADAR vectors after PAMMY to IAF for appropriate instrument approach.

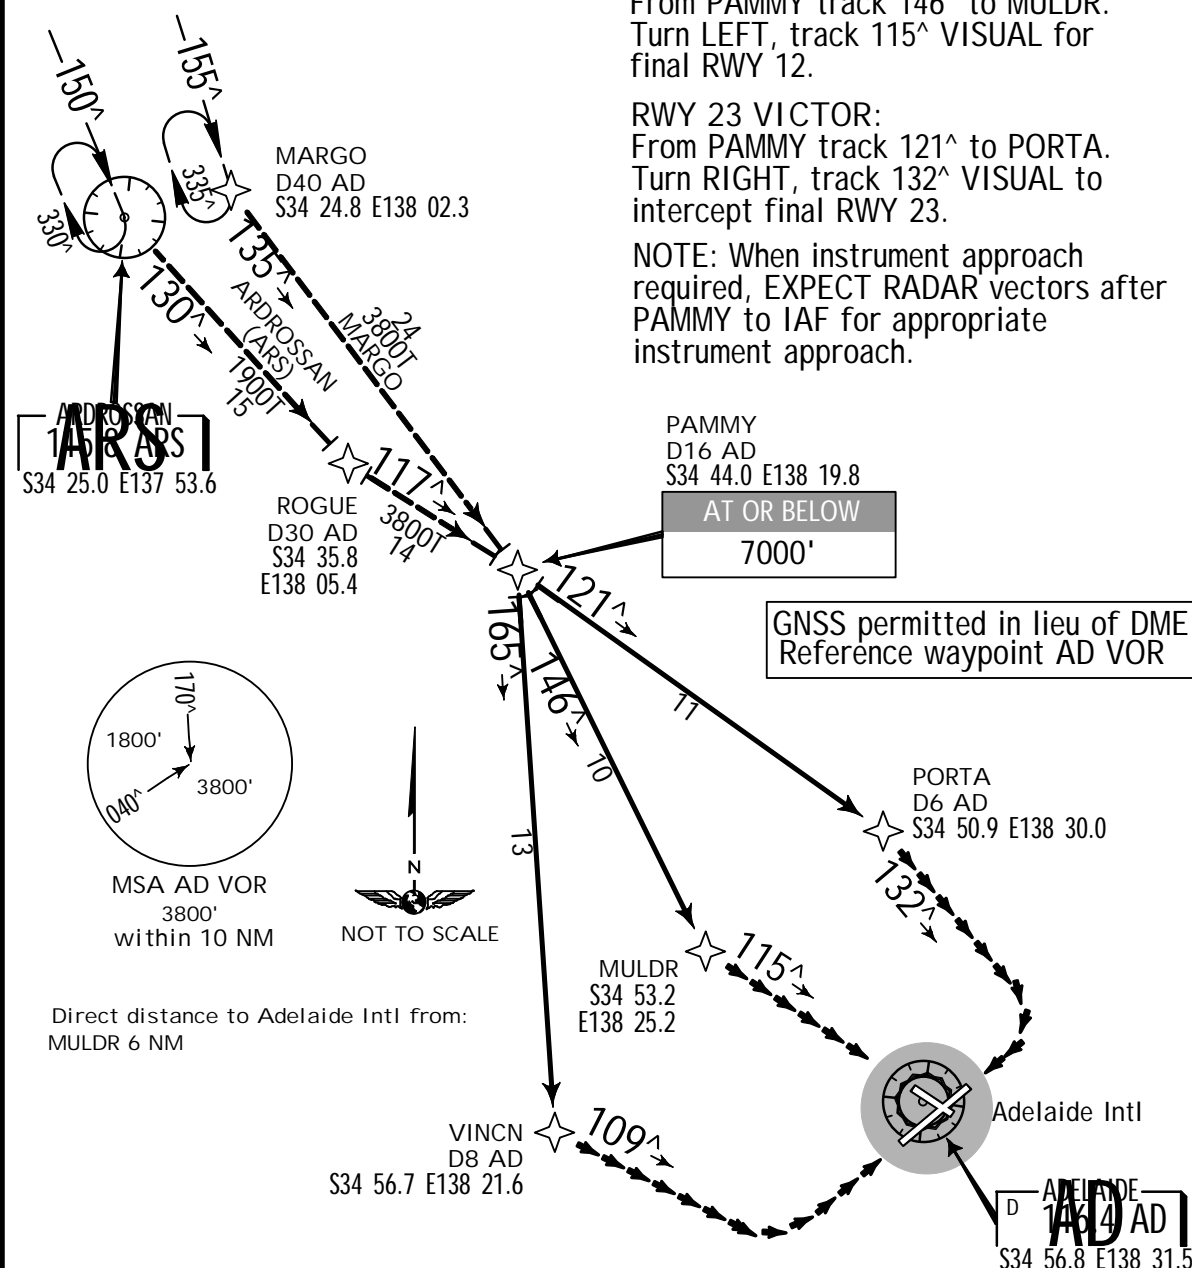

COMMS ▼ LOST COMMS ▼ LOST COMMS ▼ LOST COMMS ▼ LOST COMMS ▼ LOST COMMS ▼ LOST COMMS ▼ LOST COMMS ▼ LOST COMMS ▼ LOST COMMS ▼

COMMUNICATIONS FAILURE: PROCEDURE IN IMC

IF ABLE CONTACT ADELAIDE APPROACH ON TELEPHONE: (08) 8238-7992

Squawk 7600.

Comply with vertical navigation requirements, but not below MSA.

Track via the latest STAR clearance to the nominated runway, then fly the most suitable

JEPPESEN

10-2U

13 SEP 13
Eff. 19 Sep.

ADELAIDE, SA, AUSTRALIA

ATIS 116.4 134.5

ADELAIDE Approach (R) 128.6

YPAD ADELAIDE INTL

TRANS LEVEL: FL 110
TRANS ALT: 10000'

JETS ONLY

RAYNA FOUR ALPHA [RAYN4A], RAYNA FOUR VICTOR [RAYN4V] ARRIVALS

SPEED: MAX IAS 250 KT BELOW 10000'

TRANSITIONS

KLAVA: From KLAVA to RAYNA:
Track 161° to RAYNA. Then follow
arrival instructions.


OJJAY: From OJJAY to RAYNA:
Track 132° to ZIPPY. Turn RIGHT,
track 156° to ERITH. Track 156° to
RAYNA. Then follow arrival
instructions.

ORBUN: From ORBUN to RAYNA:
Track 184° to RAYNA. Then follow
arrival instructions.

ARRIVALS

RWY 23 ALPHA: From RAYNA track
132° to GULLY. Turn RIGHT, track
222° to MBY. Intercept LOC RWY 23.

RWY 23 VICTOR: From RAYNA track
150° to MBY. Turn RIGHT, track
visual for final RWY 23.

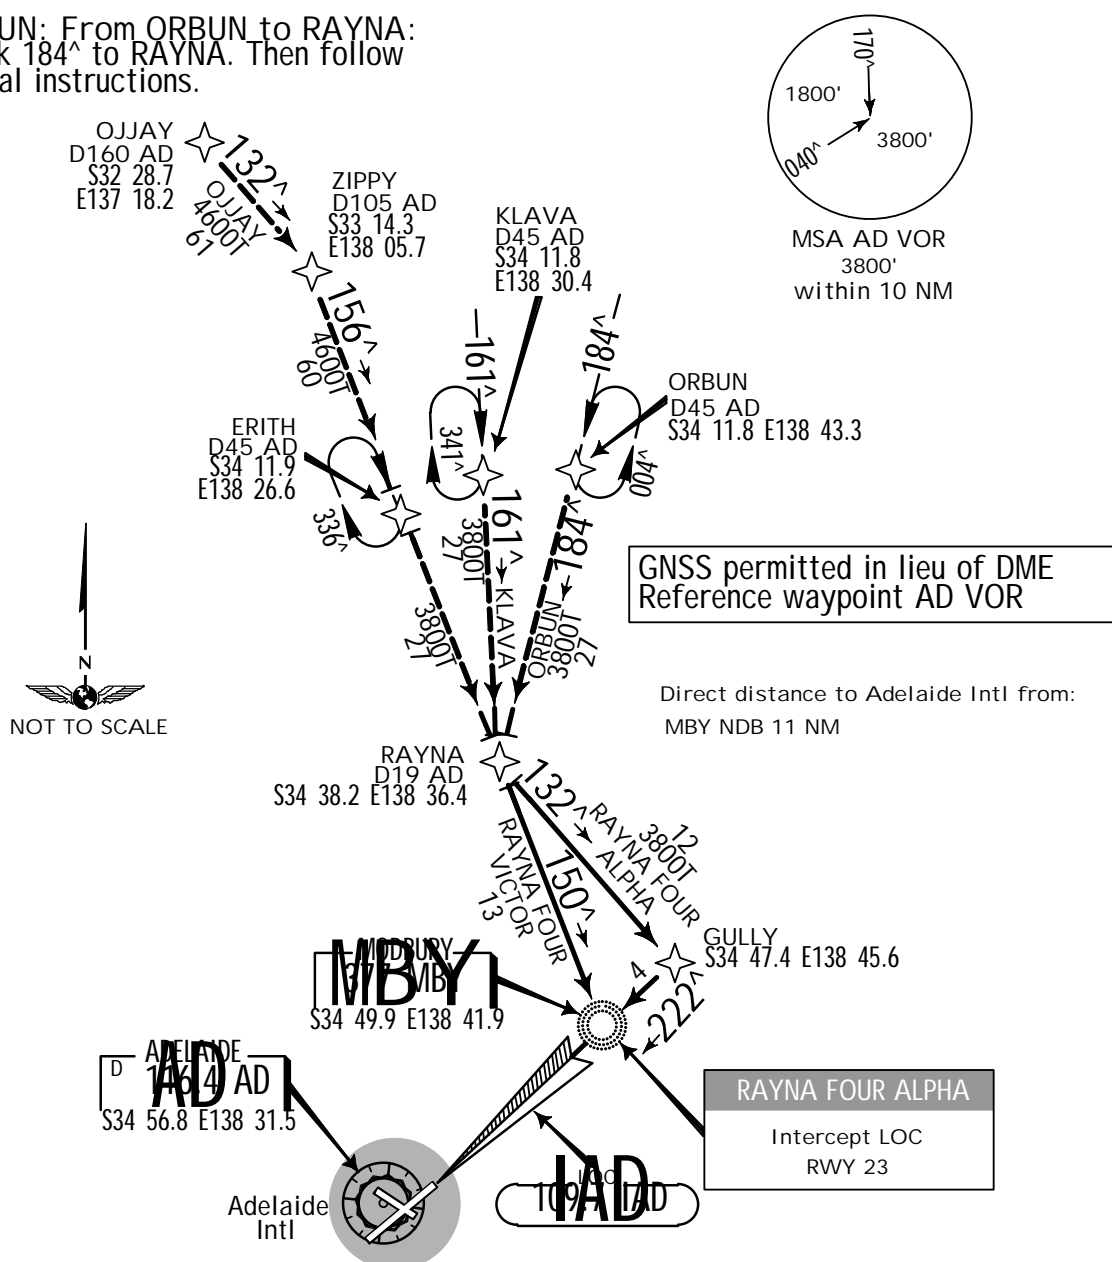

LOST COMMS ▼ LOST COMMS ▼ LOST COMMS ▼ LOST COMMS ▼ LOST COMMS ▼ LOST COMMS ▼ LOST COMMS ▼ LOST COMMS ▼ LOST COMMS ▼

COMMUNICATIONS FAILURE: PROCEDURE IN IMC
IF ABLE CONTACT ADELAIDE APPROACH ON TELEPHONE: (08) 8238-7992
Squawk 7600.
Comply with vertical navigation requirements, but not below MSA.
Track via the latest STAR clearance to the nominated runway, then fly the most suitable

JEPPESSEN

10-2V

13 SEP 13
.Eff.19.Sep.

RNAV STAR
ADELAIDE, SA, AUSTRALIA

YPAD ADELAIDE INTL

ATIS 116.4 134.5

ADELAIDE Approach (R) 128.6

TRANS LEVEL: FL 110

TRANS ALT: 10000'

JETS ONLY

RAYNA FOUR MIKE [RAYN4M], RAYNA FOUR UNIFORM [RAYN4U] ARRIVALS

SPEED: MAX IAS 250 KT BELOW 10000'

TRANSITIONS

KLAVA: From KLAVA to RAYNA:
Track 161° to RAYNA. Then follow
arrival instructions.

OJJAY: From OJJAY to RAYNA:
Track 132° to ZIPPY. Turn RIGHT,
track 156° to ERITH. Track 156° to
RAYNA. Then follow arrival
instructions.


ORBUN: From ORBUN to RAYNA:
Track 184° to RAYNA. Then follow
arrival instructions.

ARRIVALS

RWY 23 MIKE: From RAYNA track
150° to DARGA. Track via RNAV-M
(RNP) RWY 23.

RWY 23 UNIFORM: From RAYNA track
132° to GULLY. Track via RNAV-U
(RNP) RWY 23.

GNSS permitted in lieu of DME
Reference waypoint AD VOR

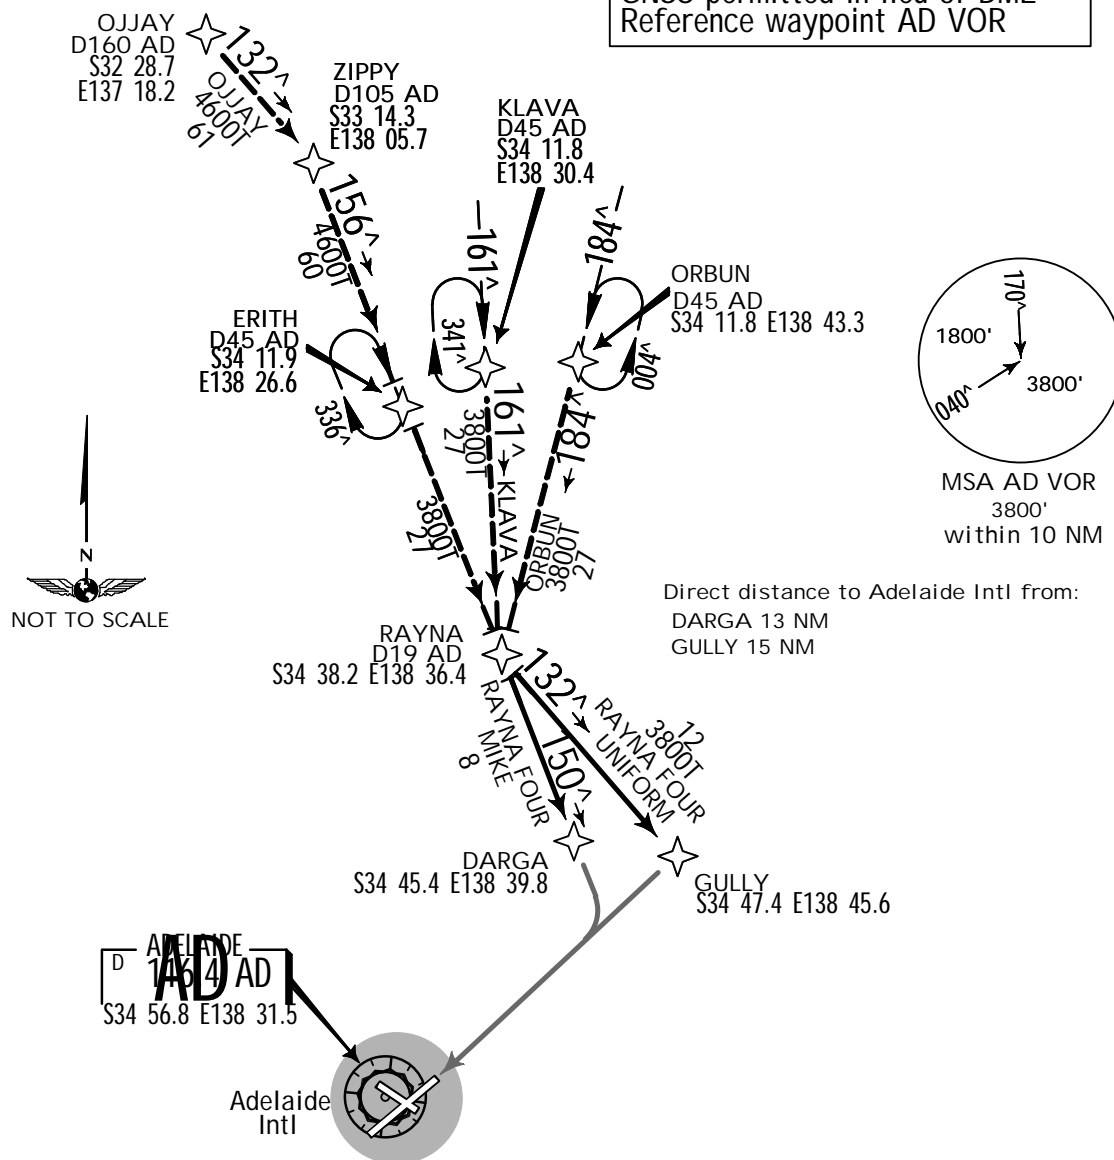

COMMUNICATIONS FAILURE: PROCEDURE IN IMC
IF ABLE CONTACT ADELAIDE APPROACH ON TELEPHONE: (08) 8238-7992
Squawk 7600.
Comply with vertical navigation requirements, but not below MSA.
Track via the latest STAR clearance to the nominated runway, then fly the most suitable

ATIS 116.4 134.5

ADELAIDE Approach (R) Within 36 NM:

NW of Rwy 05-23 124.2

TRANS LEVEL: FL 110
TRANS ALT: 10000'

This procedure becomes
effective 18 SEP 1600Z

13 SEP 13
Eff. 19.Sep.


10-2W YPAD ADELAIDE INTL

RNAV STAR.
ADELAIDE, SA,
AUSTRALIA

JETS ONLY


RIKAB EIGHT ALPHA [RIKA8A],
RIKAB EIGHT BRAVO [RIKA8B],
RIKAB EIGHT ZULU [RIKA8Z] ARRIVALS

SPEED: MAX IAS 250 KT
BELOW 10000'



MSA AD VOR
3800'
within 10 NM

GNSS permitted in lieu of DME
Reference waypoint AD VOR

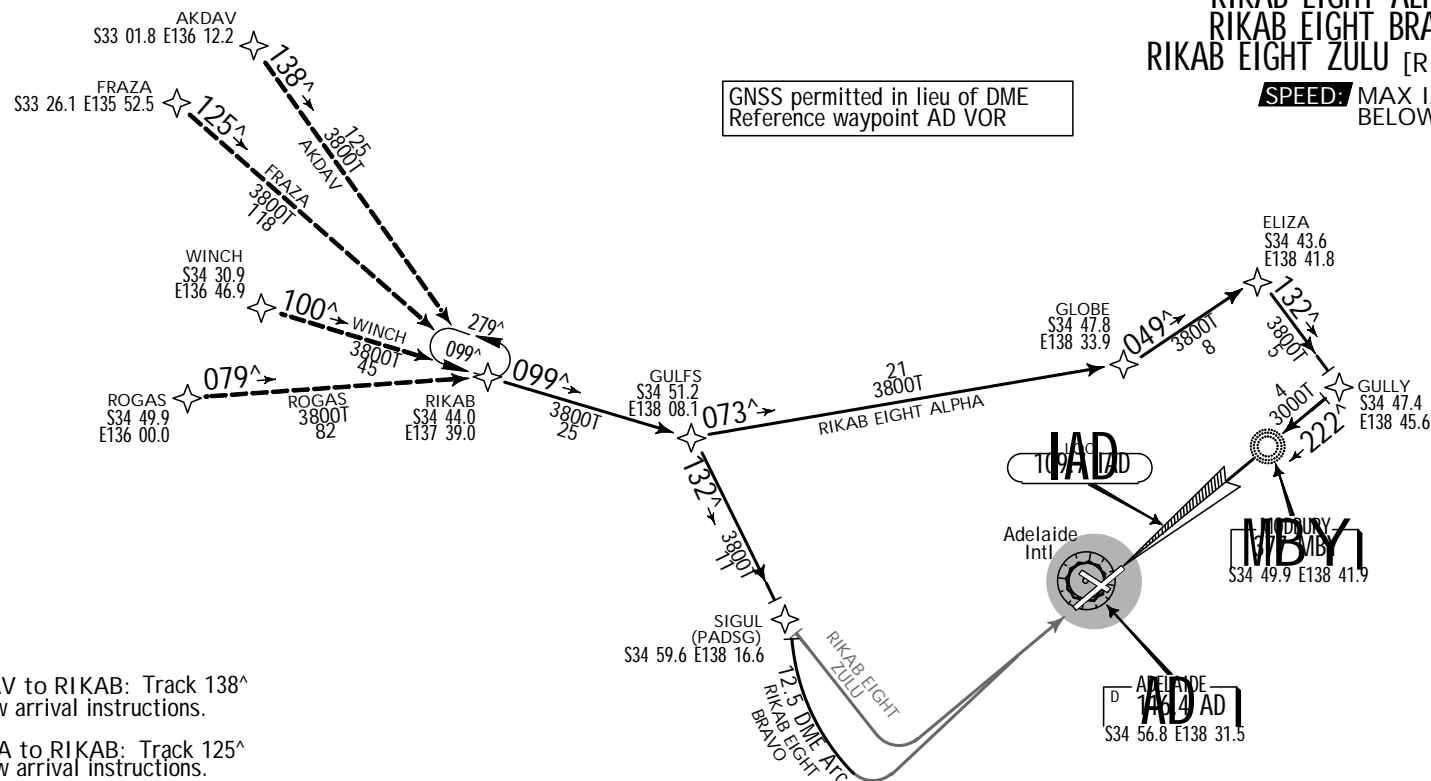

TRANSITIONS

AKDAV: From AKDAV to RIKAB: Track 138°
to RIKAB. Then follow arrival instructions.

FRAZA: From FRAZA to RIKAB: Track 125°
to RIKAB. Then follow arrival instructions.

ROGAS: From ROGAS to RIKAB: Track 079°
to RIKAB. Then follow arrival instructions.

WINCH: From WINCH to RIKAB: Track 100°
to RIKAB. Then follow arrival instructions.

ARRIVAL

Track 099° to GULFS. Then:

RWY 05 BRAVO: From GULFS turn RIGHT, track 132°
to SIGUL. Track via 12.5 DME Arc for VOR RWY 05.

RWY 05 ZULU: From GULFS turn RIGHT. Track 132°
to PADSG. Track via RNAV-Z (GNSS) RWY 05.

RWY 23 ALPHA: From GULFS turn LEFT, track 073°
to GLOBE. Turn LEFT, track 049° to ELIZA. Turn RIGHT,
track 132° to GULLY. Turn RIGHT, track 222° to MBY.
Intercept LOC RWY 23.



Direct distance to Adelaide Intl from:
MBY NDB 11 NM
SIGUL (PADSG) 13 NM

COMMUNICATIONS FAILURE: PROCEDURE IN IMC
IF ABLE CONTACT ADELAIDE APPROACH
ON TELEPHONE: (08) 8238-7992

Squawk 7600.
Comply with vertical navigation requirements, but not
below MSA. Track via the latest STAR clearance to
the nominated runway, then fly the most suitable
approach in accordance with EMERGENCY PROCEDURES.

ADELAIDE, SA, ^{.RNAV.STAR.}AUSTRALIA

YPAD ADELAIDE INTL

COMMUNICATIONS FAILURE: PROCEDURE IN IMC
IF ABLE CONTACT ADELAIDE APPROACH
ON TELEPHONE: (08) 8238-7992

Squawk 7600.

Comply with vertical navigation requirements, but not below MSA. Track via the latest STAR clearance to the nominated runway, then fly the most suitable approach in accordance with EMERGENCY PROCEDURES.

JEPPESEN, 2013. ALL RIGHTS RESERVED.

ADELAIDE, SA, ^{.RNAV.STAR.}AUSTRALIA

YPAD ADELAIDE INTL

COMMUNICATIONS FAILURE: PROCEDURE IN IMC
IF ABLE CONTACT ADELAIDE APPROACH
ON TELEPHONE: (08) 8238-7992

Squawk 7600.

Comply with vertical navigation requirements, but not below MSA. Track via the latest STAR clearance to the nominated runway, then fly the most suitable approach in accordance with EMERGENCY PROCEDURES.

JEPPESEN

10-2Z1

13 SEP 13
.Eff.19.Sep.

.RNAV.STAR.

ADELAIDE, SA, AUSTRALIA

ATIS 116.4 134.5

ADELAIDE Approach (R) Within 36 NM:

SE of Rwy 05-23 118.2

YPAD ADELAIDE INTL

TRANS LEVEL: FL 110
TRANS ALT: 10000'

NON-JETS ONLY
RUSL ONE ARRIVAL
[RUSL1]

SPEED: MAX IAS 250 KT BELOW 10000'


ARRIVAL

ALL RWYS:

From RUSL track 212° to LUFFY.

Track 212° to AD VOR. EXPECT

RADAR vectors to final approach.



MSA AD VOR
3800'
within 10 NM

GNSS permitted in lieu of DME
Reference waypoint AD VOR

RUSL
D50 AD
S34 18.8
E139 11.0

ADELAIDE
AD
S34 56.8 E138 31.5

Adelaide Intl

LUFFY
D20 AD
S34 41.7
E138 47.3

20
3800T
EXPECT vectors
to final



COMMS ▼ LOST COMMS ▼ LOST COMMS ▼ LOST COMMS ▼ LOST COMMS ▼ LOST COMMS ▼ LOST COMMS ▼ LOST COMMS ▼ LOST COMMS ▼

LOST
COMMS

COMMUNICATIONS FAILURE: PROCEDURE IN IMC

IF ABLE CONTACT ADELAIDE APPROACH ON TELEPHONE: (08) 8238-7992

Squawk 7600.

Comply with vertical navigation requirements, but not below MSA.

Track via the latest STAR clearance to the nominated runway, then fly the most suitable


LOST
COMMS

RNAV STAR.
ADELAIDE, SA,
AUSTRALIA

ATIS 116.4 134.5
ADELAIDE Approach (R) Within 36 NM:
NW of Rwy 05-23 124.2


This procedure becomes effective 18 SEP 1600Z 13 SEP 13 . Eff. 19 Sep. 10-2Z2 YPAD ADELAIDE INTL

TRANS LEVEL: FL 110
TRANS ALT: 10000'



MSA AD VOR
3800'
within 10 NM

GNSS permitted in lieu of DME
Reference waypoint AD VOR

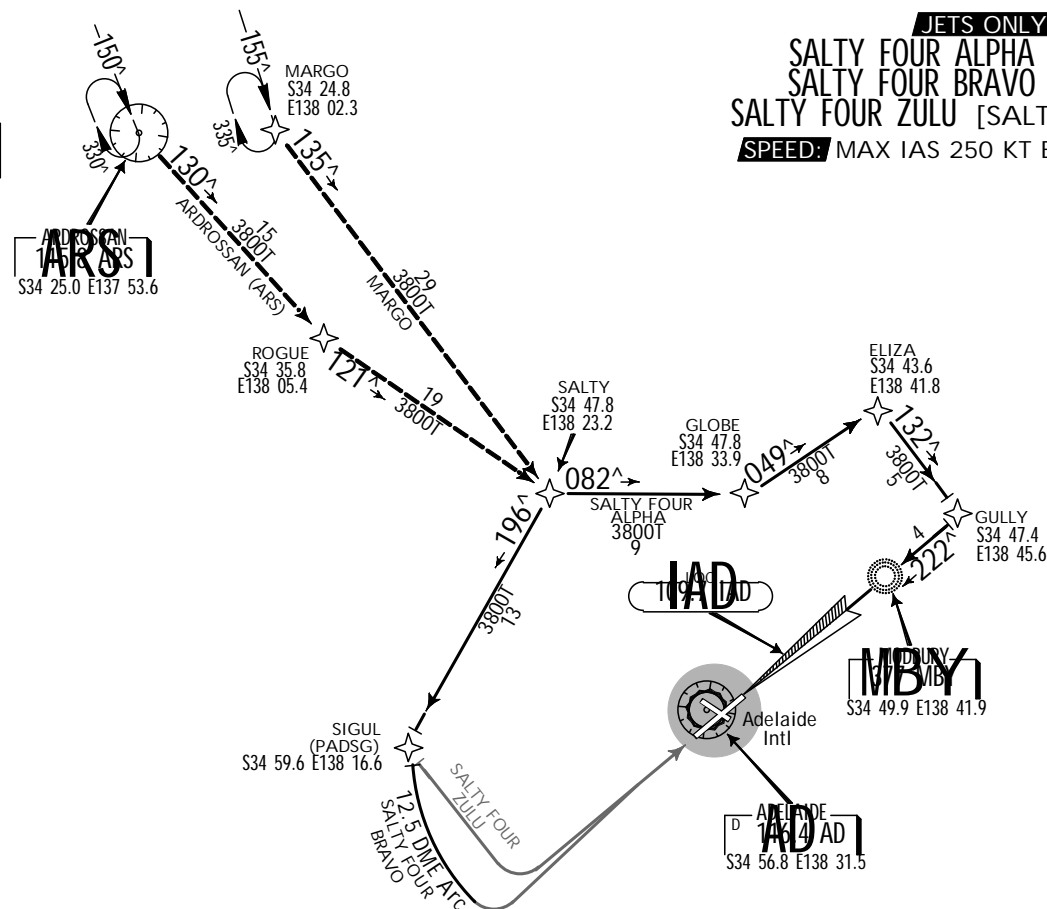

TRANSITIONS

MARGO: From MARGO to SALTY:
Track 135° to SALTY.
Then follow arrival instructions.

ARDROSSAN (ARS): From ARS VOR to SALTY:
Track 130° to ROGUE.
Turn LEFT, track 121° to SALTY. Then
follow arrival instructions.

ARRIVALS

RWY 05 BRAVO: From SALTY turn RIGHT,
track 196° to SIGUL. Track via 12.5 DME Arc
to VOR RWY 05.

RWY 05 ZULU: From SALTY turn RIGHT,
Track 196° to PADSG. Track via RNAV-Z
(GNSS) RWY 05.

RWY 23 ALPHA: From SALTY turn LEFT,
track 082° to GLOBE. Turn LEFT, track 049°
to ELIZA. Turn RIGHT, track 132° to GULLY.
Turn RIGHT track 222° to MBY. Intercept
LOC RWY 23.



NOT TO SCALE

Direct distance to Adelaide Intl from:
MBY NDB 11 NM
SIGUL (PADSG) 13 NM

COMMUNICATIONS FAILURE: PROCEDURE IN IMC
IF ABLE CONTACT ADELAIDE APPROACH ON TELEPHONE: (08) 8238-7992
Squawk 7600.
Comply with vertical navigation requirements, but not below MSA.
Track via the latest STAR clearance to the nominated runway, then fly the most suitable
EMERGENCY PROCEDURES.

ATIS 116.4 134.5

ADELAIDE Approach (R) Within 36 NM:

NW of Rwy 05-23 124.2

TRANS LEVEL: FL 110
TRANS ALT: 10000'

JEPPESEN

RNAV STAR.
ADELAIDE, SA, AUSTRALIA

13 SEP 13
.Eff.19.Sep.

10-2Z3


This procedure becomes
effective 18 SEP 1600Z

YPAD ADELAIDE INTL


JETS ONLY

SALTY FOUR PAPA ARRIVAL
[SALT4P]

SPEED: MAX IAS 250 KT BELOW 10000'



MSA AD VOR
3800'
within 10 NM

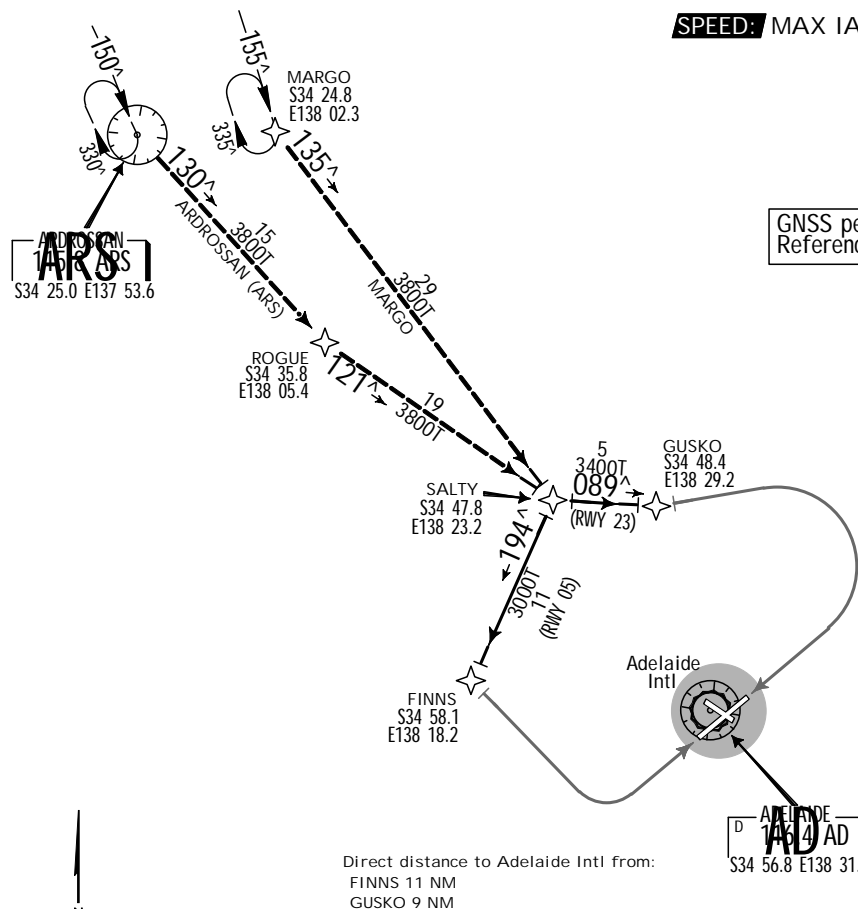

GNSS permitted in lieu of DME
Reference waypoint AD VOR

TRANSITIONS

MARGO: From MARGO to SALTY:
Track 135° to SALTY. Then follow arrival
instructions.

ARDROSSAN (ARS): From ARS VOR to SALTY:
Track 130° to ROGUE. Turn LEFT, track
121° to SALTY. Then follow arrival
instructions.

ARRIVALS

RWY 05: From SALTY turn RIGHT, track
194° to FINNS. Track via RNAV-P (RNP)
RWY 05.

RWY 23: From SALTY turn LEFT, track
089° to GUSKO. Track via RNAV-P (RNP)
RWY 23.



Direct distance to Adelaide Intl from:
FINNS 11 NM
GUSKO 9 NM

COMMUNICATIONS FAILURE: PROCEDURE IN IMC
IF ABLE CONTACT ADELAIDE APPROACH ON TELEPHONE: (08) 8238-7992
Squawk 7600.
Comply with vertical navigation requirements, but not below MSA.
Track via the latest STAR clearance to the nominated runway, then fly the most suitable
EMERGENCY PROCEDURES.

13 SEP 13
Eff. 19. Sep. 10-2Z4

RNAV.STAR.
ADELAIDE, SA,
AUSTRALIA

YPAD ADELAIDE INTL

JETS ONLY
SALTY FOUR UNIFORM ARRIVAL
[SALT4U]

SPEED: MAX IAS 250 KT BELOW 10000'



SPEED: MAX IAS 250 KT BELOW 10000

of DME VOR

Adelaide (ARS)
S34 25.0 E137 53.6

MARGO
S34 24.8 E138 02.3

ANDROSSAN (ARS)
S34 25.0 E137 53.6

ROGUE
S34 35.8 E138 05.4

SALTY
S34 47.8 E138 23.2

GLOBE
S34 47.8 E138 33.9

ELIZA
S34 43.6 E138 41.8

GULLY
S34 47.4 E138 45.6

Adelaide Intl

Adelaide (ARS)
S34 25.0 E137 53.6

RWY 23: From SALTY turn LEFT, track 082[^] to GLOBE. Turn LEFT, track 049[^] to ELIZA. Turn RIGHT, track 132[^] to GULLY. Track via RNAV-U (RNP) RWY 23.

COMMUNICATIONS FAILURE: PROCEDURE IN IMC
IF ABLE CONTACT ADELAIDE APPROACH ON TELEPHONE: (08) 8238-7992
Squawk 7600.
Comply with vertical navigation requirements, but not below MSA.
Track via the latest STAR clearance to the nominated runway, then fly the most suitable EMERGENCY PROCEDURES.

ATIS	116.4	134.5
------	-------	-------

ADELAIDE Approach (R) Within 36 NM:

NW of Rwy 05-23 124.2

This procedure becomes effective 18 SEP 1600Z

ADELAIDE, SA, AUSTRALIA

YPAD ADELAIDE INTL

TRANS LEVEL: FL 110
TRANS ALT: 10000'

JETS ONLY

SALTY FOUR VICTOR ARRIVAL
[SALT4V]

SPEED: MAX IAS 250 KT BELOW 10000'

TRANSITIONS


MARGO: From MARGO to SALTY:
Track 135^ to SALTY. Then follow
arrival instructions.

ARDROSSAN (ARS): From ARS VOR
to SALTY:
Track 130° to ROGUE. Turn LEFT,
track 121° to SALTY. Then follow
arrival instructions.

ARRIVAL

RWY 05: From SALTY turn RIGHT, track 194^ to FINNS. Turn LEFT, track 122^ to IGLAS. Turn LEFT, track 096^ VISUAL to BITON. Turn LEFT, intercept VISUAL final RWY 05.

RWY 23: From SALTY turn LEFT, track 080° to MALIK. Turn RIGHT, track 132° VISUAL to OKTON. Turn RIGHT, intercept VISUAL final RWY 23.

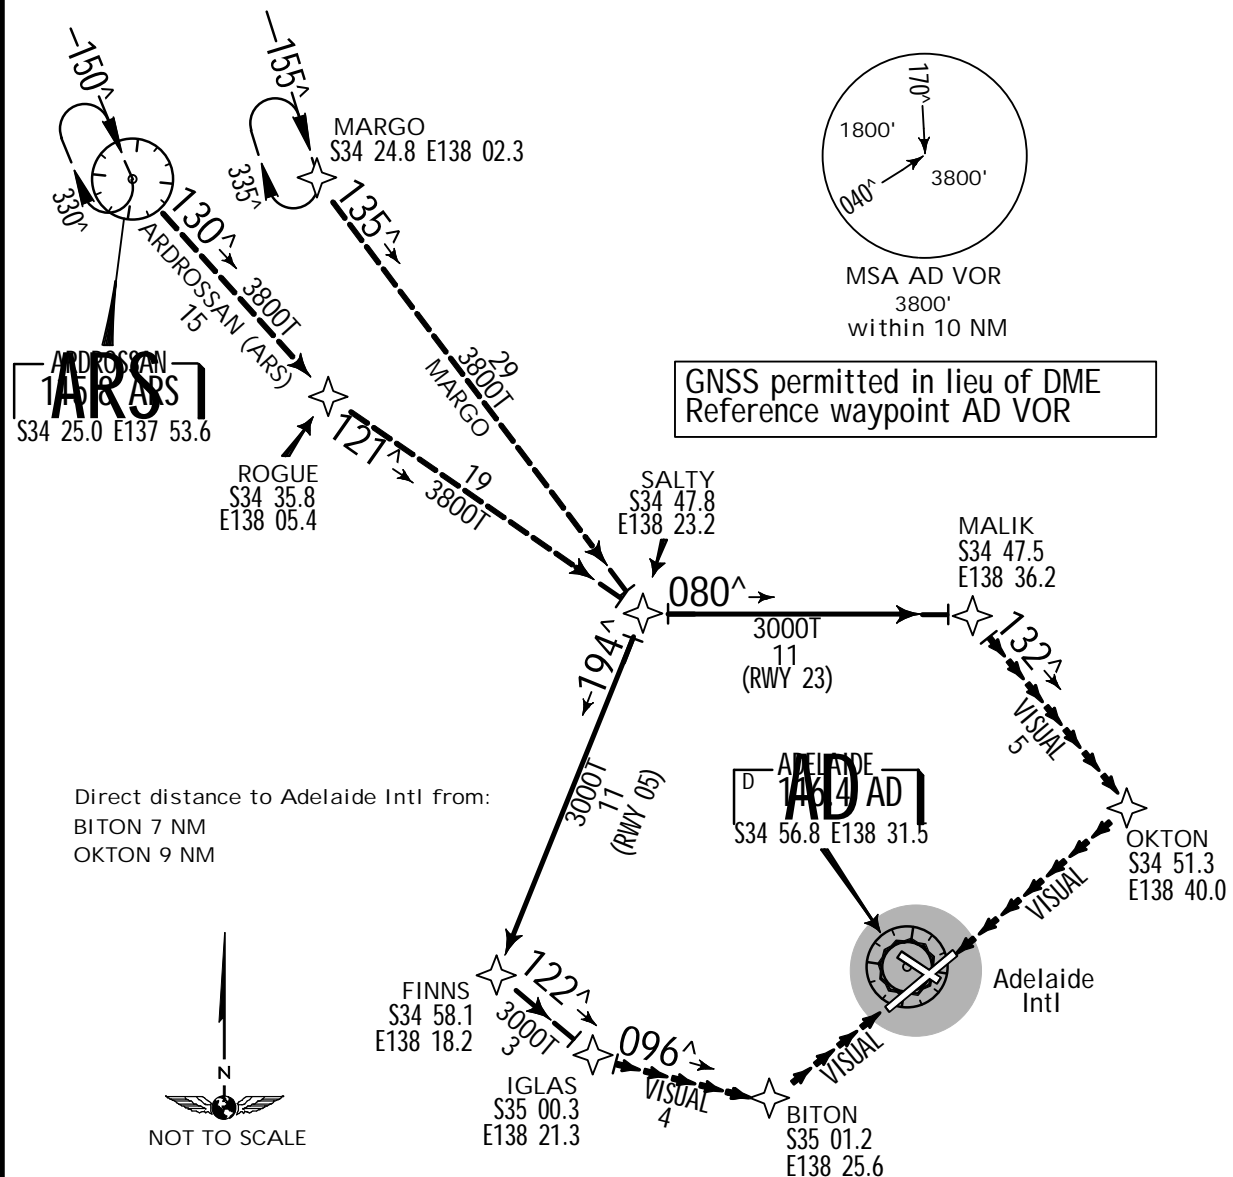

COMMS ▼ LOST COMMS ▼ LOST COMMS ▼ LOST COMMS ▼ LOST COMMS ▼ LOST COMMS ▼ LOST COMMS ▼ LOST COMMS ▼ LOST COMMS

COMMUNICATIONS FAILURE: PROCEDURE IN IMC
IF ABLE CONTACT ADELAIDE APPROACH ON TELEPHONE: (08) 8238-7992

Squawk 7600.
Comply with vertical navigation requirements, but not below MSA.
Track via the latest STAR clearance to the nominated runway, then fly the most suitable

JEPPESEN

10-276

13 SEP 13
.Eff.19.Sep.

.RNAV.STAR.

ADELAIDE, SA, AUSTRALIA

ATIS 116.4 134.5

ADELAIDE Approach (R) Within 36 NM:

SE of Rwy 05-23 118.2

YPAD ADELAIDE INTL

TRANS LEVEL: FL 110

TRANS ALT: 10000'

NON-JETS ONLY
SURGN ONE ARRIVAL
[SURGN1]

SPEED: MAX IAS 250 KT BELOW 10000'


TRANSITION

BLACK: From BLACK track 248^ to SURGN. Cross SURGN at or below FL110. Then follow arrival instructions.


ARRIVAL

ALL RWYS:
From SURGN track 248^ to GRIGS.
Track 249^ to AD VOR. EXPECT
RADAR vectors to final approach.

GNSS permitted in lieu of DME
Reference waypoint AD VOR



MSA AD VOR
3800'
within 10 NM

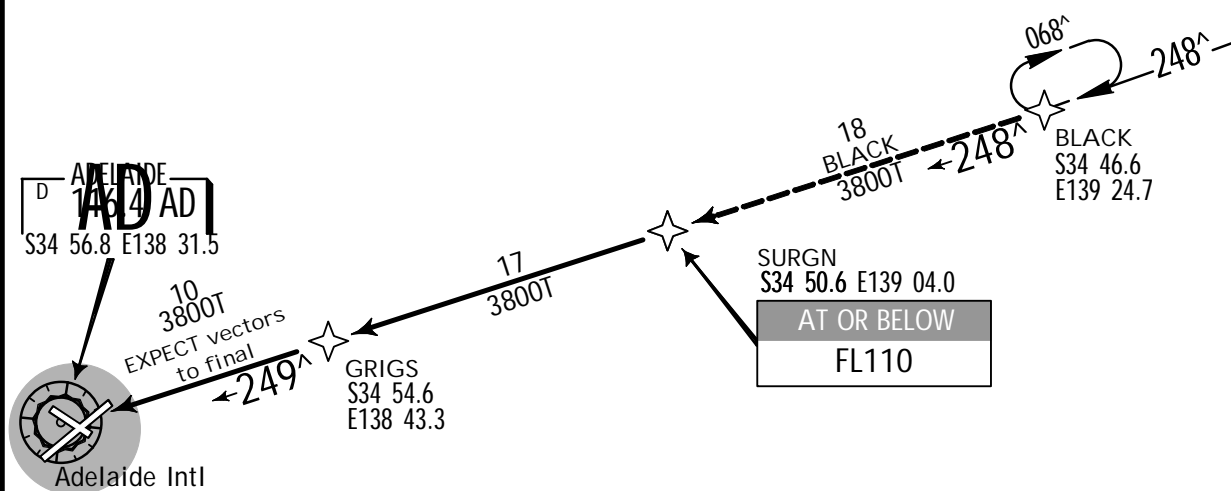

COMMS ▼ LOST COMMS ▼ LOST COMMS ▼ LOST COMMS ▼ LOST COMMS ▼ LOST COMMS ▼ LOST COMMS ▼ LOST COMMS ▼ LOST COMMS

LOST
COMMS
▼

COMMUNICATIONS FAILURE: PROCEDURE IN IMC
IF ABLE CONTACT ADELAIDE APPROACH ON TELEPHONE: (08) 8238-7992
Squawk 7600.
Comply with vertical navigation requirements, but not below MSA.
Track via the latest STAR clearance to the nominated runway, then fly the most suitable

LOST
COMMS
▲

JEPPESEN 15 AUG 14 (10-3)

.Eff.21.Aug.

ADELAIDE Clearance 126.1
Approach (R) (DEP) Within 36 NM:
NW of Rwy 05-23 124.2
SE of Rwy 05-23 118.2

STANDARD INSTRUMENT DEPARTURE (RADAR) **SID(R).**
ADELAIDE, SA, AUSTRALIA
YPAD ADELAIDE INTL

TRANS LEVEL: FL 110
TRANS ALT: 10000'

ADELAIDE THREE DEPARTURE (RADAR) ALL RUNWAYS [AD3]

Minimum required climb gradients:

Rwy 05: (EAST of Rwy centerline) 5.7% to 3300'.
Rwy 05: (On and WEST of Rwy centerline) 4.4% to 900'.
Rwy 12: 4.7% to 1500'.
Rwys 23/30: 4.7% to 3300'.

Gnd speed-Kts	75	100	150	200	250	300
4.4% V/V (fpm)	334	446	668	891	1114	1337
4.7% V/V (fpm)	357	476	714	952	1190	1428
5.7% V/V (fpm)	433	577	866	1155	1443	1732

NOTES:

- For Rwy 05 departures, aircraft with flight plan tracks in the sector 042° through WEST to 219° can EXPECT a LEFT turn.
- Jets departing from Rwys 23/30 for tracks to the EAST of Adelaide can EXPECT to be at or above 5000' by crossing AD R-185, or the coast EASTBOUND.
- When AD DME not available, upon pilot request approach will advise passing DME distances based on RADAR observation.


RWY 05 (Departures EAST of RWY centerline)
Track 042°. At or above 1700' and after passing AD 2 DME, turn to assigned heading. RIGHT turns below 1700' not available.

RWY 05 (Departures on and WEST of RWY centerline)
Track 042°. At or above 900', turn LEFT to assigned heading (Heading 042° also available).

RWY 12 (MAX IAS 175 KT until tracking 180°). Track 115°. At or above 500' and between AD 1 DME and AD 2 DME turn RIGHT track 180°. At or above 3300' turn to assigned heading.

RWY 23
Track 222°. At or above 600' and after passing AD 1 DME SOUTHWEST, turn to assigned heading.

RWY 30
Track 295°. At or above 500' and after passing AD 1 DME NORTHWEST, turn to assigned heading.

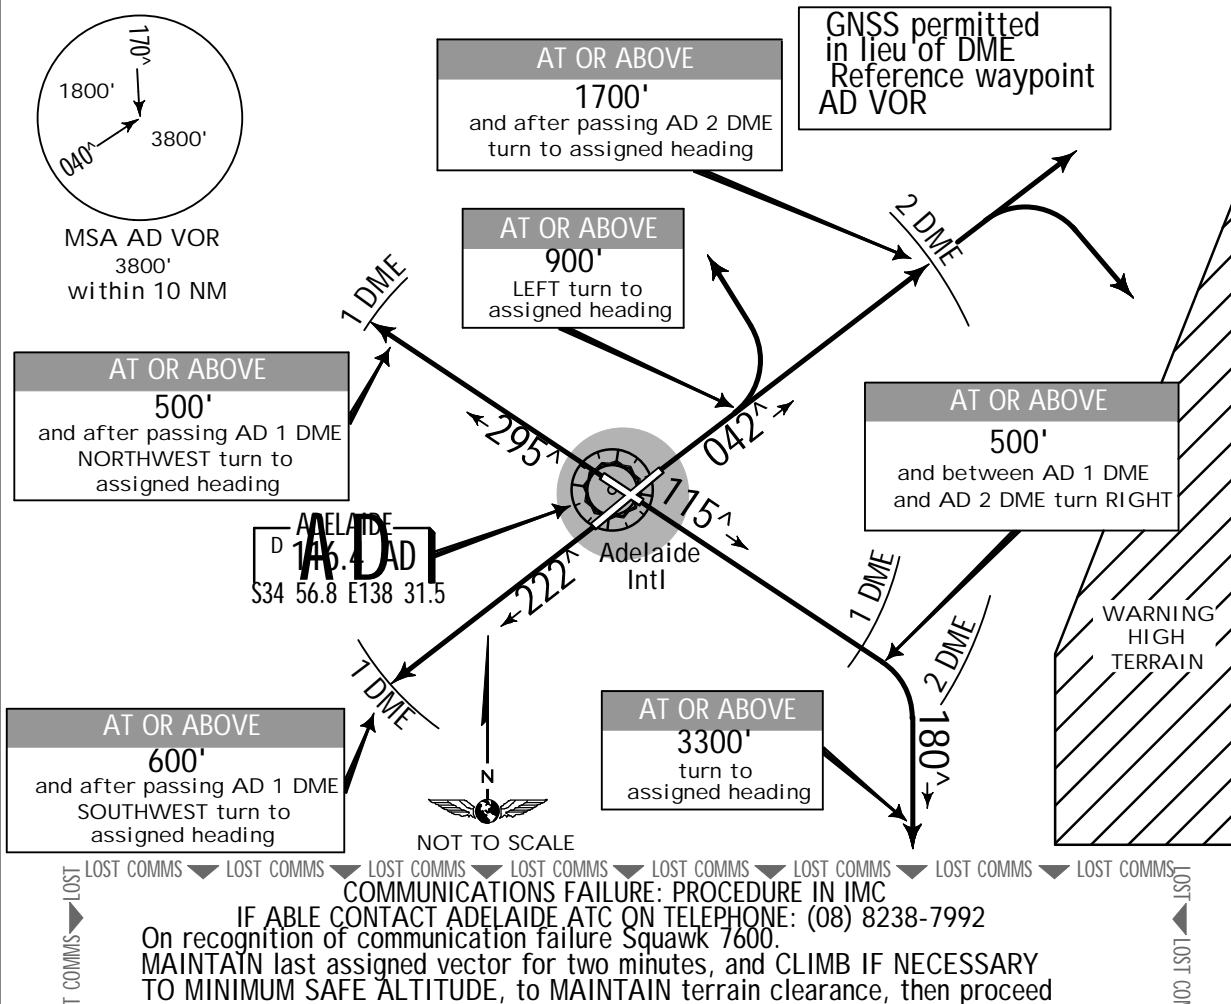

JEPPESSEN 15 AUG 14 (10-3A) .Eff.21.Aug.

.RNAV.SID.
ADELAIDE, SA, AUSTRALIA

YPAD ADELAIDE INTL

ADELAIDE Clearance 126.1
Approach (R) (DEP) Within 36 NM:
NW of Rwy 05-23 124.2

TRANS LEVEL: FL 110
TRANS ALT: 10000'

JETS ONLY


RUNWAYS WEST

GILES TWO DEPARTURE [GILES2], HAWKY THREE DEPARTURE [HAWKY3]

SPEED: MAX IAS 250 KT BELOW 10000'

Minimum required climb gradient:
Rwy 05: 4.1% to 800'.

Gnd speed-Kts	75	100	150	200	250	300
4.1% V/V (fpm)	311	415	623	830	1038	1246



MSA AD VOR
3800'
within 10 NM

RWY 05
Track 042° to MBY NDB. Cross
MBY NDB at or above 5000'. Turn
LEFT track 312° to SALIS. Cross
SALIS at or above 7000'. Turn
LEFT, track 234° to PARKA.
Cross PARKA at or above 10000'.

For GILES:
Track 234° to DERWY. Turn
RIGHT track 256° to GILES,
thence as cleared.


For HAWKY:
Turn RIGHT, track 279° to BIGAL.
Turn RIGHT track 296° to HAWKY,
thence as cleared.

RWY 23
Track 222° to CORNS. Cross CORNS
at or above 5000'. Turn RIGHT
track 312° to KEEFO. Cross KEEFO
at or above 8000'.

For GILES:
Turn LEFT track 256° to DERWY.
Track 256° to GILES,
thence as cleared.

For HAWKY:
Turn RIGHT track 332° to BIGAL.
Turn LEFT track 296° to HAWKY,
thence as cleared.

GNSS permitted in lieu of DME
Reference waypoint AD VOR

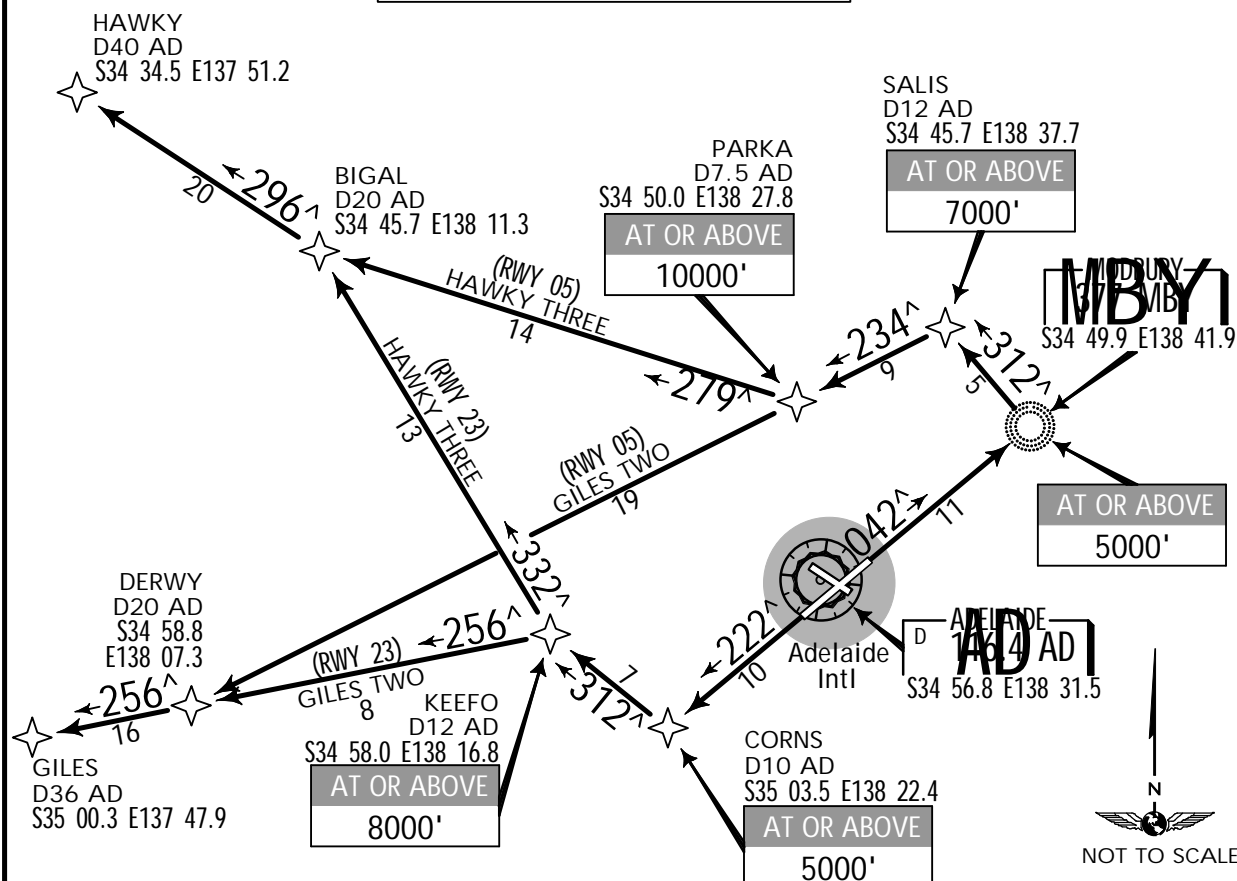

JEPPESEN

10-3B

24 MAY 13
.Eff.30.May.

.RNAV.SID.
ADELAIDE, SA, AUSTRALIA

ADELAIDE Clearance 126.1

Approach (R) (DEP) Within 36 NM:

NW of Rwy 05-23 124.2

YPAD ADELAIDE INTL

TRANS LEVEL: FL 110
TRANS ALT: 10000'

JETS ONLY

ORBUN THREE DEPARTURE [ORBUN3]

SPEED: MAX IAS 250 KT BELOW 10000'


Minimum required climb gradient:
4.1% to 800'.

Gnd speed-Kts	75	100	150	200	250	300
4.1% V/V (fpm)	311	415	623	830	1038	1246

RWY 05


Track 042° to MBY NDB. Cross MBY NDB
at or above 5000'. Turn LEFT track 354°
to ORBUN, then as cleared.

GNSS permitted in lieu of DME
Reference waypoint AD VOR



MSA AD VOR
3800'
within 10 NM

Adelaide Intl



ADELAIDE
D 146.4 AD
S34 56.8 E138 31.5

ORBUN
D46 AD
S34 11.8 E138 43.3

38

354°

MBY
S34 49.9 E138 41.9

AT OR ABOVE
5000'



NOT TO SCALE

JEPPESSEN

10-3C

24 MAY 13
Eff. 30 May.

.RNAV.SID.

ADELAIDE, SA, AUSTRALIA

YPAD ADELAIDE INTL

ADELAIDE Clearance 126.1
Approach (R) (DEP) Within 36 NM:
SE of Rwy 05-23 118.2

TRANS LEVEL: FL 110
TRANS ALT: 10000'

RUNWAYS EAST

JETS ONLY

PANKI TWO [PANKI2], TAILEM BEND (TBD) SEVEN [TBD7] DEPARTURES

SPEED: MAX IAS 250 KT BELOW 10000'

JETS ONLY

PANKI TWO [PANKI2],
TAILEM BEND (TBD) SEVEN [TBD7] DEPARTURES
SPEED: MAX IAS 250 KT BELOW 10000'

RWY 23
Track 222° to COLPY. Cross COLPY at or above 2500'. Turn LEFT, track 134° to SULLY. Cross SULLY at at or above 5000'. Turn LEFT, track 077° to MORPH. Cross MORPH at or above 6000'. Track 077° to CLARY. Track 077° to BARKA. Cross BARKA at or above FL 140. Track 077° to MURRY.

Minimum required climb gradient:
Rwy 05: 5.7% to 3300'.

Gnd speed-Kts	75	100	150	200	250	300
5.7% V/V (fpm)	433	577	866	1155	1443	1732



RWY 05
Track 042°. After passing KNOBL and 1700', turn RIGHT. Track direct to ROGGS.

For PANKI:
From ROGGS turn LEFT track 078° to PANKI, then as cleared.

For TBD:
From ROGGS turn as required, track 102° to TBD, then as cleared.

For PANKI:
From MURRY track 077° to PANKI, then as cleared.

For TBD:
From MURRY turn RIGHT track 119° to TBD, then as cleared.



MSA AD VOR
3800'
within 10 NM

KNOBL
S34 55.8 E138 33.6
TURN RIGHT
After passing KNOBL and 1700'

ADELAIDE
AD
S34 56.8 E138 31.5
AT OR ABOVE 2500'

COLPY
D7 AD
S5 02.2 E138 24.2
AT OR ABOVE 2500'

MORPH
S35 06.2 E138 32.8
AT OR ABOVE 6000'

SULLY
S35 06.5 E138 28.3
AT OR ABOVE 5000'

CLARY
S35 06.0 E138 36.4

BARKA
S35 04.7 E138 55.9
AT OR ABOVE FL 140

ROGGS
S35 03.7 E138 54.4

PANKI TWO
(RWY 05)

MURRY
S35 03.6 E139 12.8

PANKI TWO
S34 58.6 E140 21.0

TAILEM BEND (TBD) SEVEN
(RWY 23)

TAILEM BEND (TBD) SEVEN
(RWY 23)

GNSS permitted in lieu of DME
Reference waypoint AD VOR

JEPPESEN

10-3D

16 AUG 13
Eff. 22 Aug.

.RNAV.SID.

ADELAIDE, SA, AUSTRALIA

YPAD ADELAIDE INTL

ADELAIDE Clearance 126.1
Approach (R) (DEP) Within 36 NM:
SE of Rwy 05-23 118.2

TRANS LEVEL: FL 110
TRANS ALT: 10000'

JETS ONLY

SEDAN NINE DEPARTURE

[SEDAN9]

SPEED: MAX IAS 250 KT BELOW 10000'

Minimum required climb gradient:
Rwy 05: 4.1% to 800'.

Gnd speed-Kts	75	100	150	200	250	300
4.1% V/V (fpm)	311	415	623	830	1038	1246


RWY 05

Track 042° to MBY NDB. Cross MBY NDB at or above 5000'. Track 043° to GULLY. Turn RIGHT track 056° to SEDAN, then as cleared.


RWY 23

Track 222° to COLPY. Cross COLPY at or above 2500'. Turn LEFT track 134° to SULLY. Cross SULLY at or above 5000'. Turn LEFT track 077° to MORPH. Cross MORPH at or above 6000'. Track 077° to CLARY. Turn LEFT, track 039° to URADA. Cross URADA at or above FL120. Track 039° to SEDAN, then as cleared.

GNSS permitted in lieu of DME
Reference waypoint AD VOR



MSA AD VOR
3800'
within 10 NM

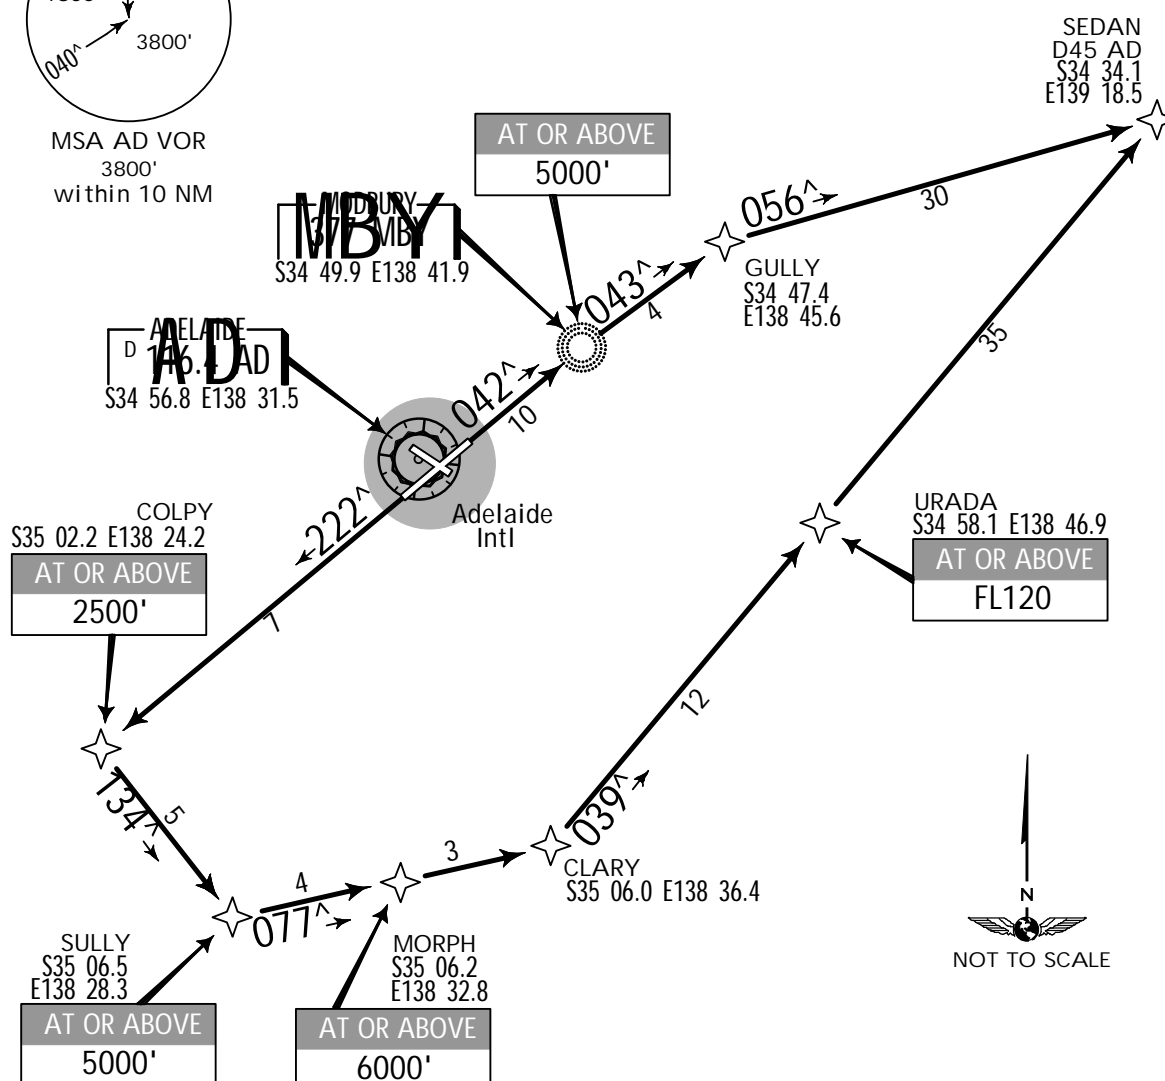

YPAD/ADL


JEPPESEN
 22 NOV 13 (10-4)

ADELAIDE, SA, AUSTRALIA
 ADELAIDE INTL

NOISE

NOISE ABATEMENT PROCEDURES

SUMMER (Oct-Mar):	Local Time minus	10 1/2 HOURS	= UTC
WINTER:	Local Time minus	9 1/2 HOURS	= UTC

Noise Abatement Procedures shall apply to all aircraft except where specifically exempted in the following paragraphs.

PREFERRED RUNWAYS

a. Between the hours of 0600 - 2300 LT, the preferred runways are:

1. Runway 23
2. Runway 05

When Runway 23 is the duty runway, aircraft may land Runway 05. When Runway 05 is the duty Runway, aircraft may take-off Runway 23.

In the event of the non-availability of Runway 05/23, the preferred runways are:

1. Runway 30
2. Runway 12

When Runway 30 is the duty runway, aircraft may land Runway 12. When Runway 12 is the duty Runway, aircraft may take-off Runway 30.

Jet noise abatement climb procedures apply on Runways 05, 12 and 30.

b. During the hours of 0600 - 0700 LT and 2100 - 2300 LT, shoulder periods exist.

1. When Runway 23 is the duty runway, non-jet aircraft below 25,000kg (55,116 lbs) MTOW may land on runways other than Runway 23.
2. When Runway 05 is the duty runway, non-jet aircraft below 25,000kg (55,116 lbs) MTOW may take-off on runways other than Runway 05.

c. Between 0700 - 2100 LT, preferred runways may be waived for non-jet aircraft below 25,000kg (55,116 lbs) MTOW.

YPAD/ADL


JEPPESEN
22 NOV 13 (10-4A)

NOISE.
ADELAIDE, SA, AUSTRALIA
ADELAIDE INTL

NOISE ABATEMENT PROCEDURES

PREFERRED FLIGHT PATHS

Preferred flight paths do not apply to single engine aircraft less than 1750kg (3858 lbs) MTOW. Preferred flight paths may be waived for non-jet aircraft less than 25,000kg (55,116 lbs) MTOW, between 0700 - 2100 LT.

a. Arriving Aircraft

Via a STAR where available otherwise in compliance with the following provisions:

Landing Runway 23

From the east - Intercept the Runway 23 localizer at or beyond the Modbury (MBY) NDB, or the R047 (Rwy 23 VOR) at or beyond 10 NM. Aircraft shall not be cleared below 3000 ft until passing MBY or 10 NM.

From the west - Right circuit/base.

Landing Runway 05

From the east - Track via LUNGA to intercept runway centerline at or beyond 5 NM for jet aircraft and 3 NM for non-jets (AD R215 for VOR Rwy 05 approach). Descent below 3000 ft is not available until west of the coast.

From the west - Intercept runway centerline at, or beyond, 5 NM for jets and 3 NM for non-jets (AD R215 for VOR Rwy 05 approach).

Landing Runway 12

From the east - Intercept the AD 10 DME arc, thence intercept the runway centerline at, or beyond, 5 NM for jets and 3 NM for non-jets (AD R304 for instrument approach). Descent below 3000 ft is not available until west of the coast.

From the west - Intercept runway centerline at, or beyond, 5 NM for jets and 3 NM for non-jets (AD R304 for instrument approach).

Landing Runway 30

From the east - Intercept the runway centerline at, or beyond, 10 NM (AD R110 for instrument approach).

From the west - As determined by traffic management requirements.

b. Departing Aircraft

Runway 23 - East: Jets maintain runway heading/track until at least 6 NM then via SULLY. Non-jets maintain runway heading/track until at least 3 NM, then seawards of the coast and then via SULLY. West: Maintain runway heading/track until at least 3 NM.

Runway 30 - Maintain runway heading/track until at least 3 NM.

Runway 05 and 12 - No requirements.

Aircraft departing Runway 23 or 30 for tracks to the east of the coastline will be required to be at or above 3000 ft for non-jets or 5000 ft for jets before crossing the coastline eastbound.

YPAD/ADL


JEPPESEN
15 FEB 13 (10-4B)

ADELAIDE, SA, AUSTRALIA
ADELAIDE INTL

NOISE ABATEMENT PROCEDURES

TRAINING FLIGHTS

a. AWK TRNG involving instrument approach procedures is only permitted during designated periods between 0700 and 2300 local. Preferred RWY and preferred flight paths may be waived. A single practice instrument approach by ARR ACFT, other than AWK TRNG flights, may be approved at any time during this period. Requests should be made as early as possible, preferably at the flight planning stage.

b. AWK TRNG flights conducting approaches to a RWY, including touch and go, bailed, circling and missed approach maneuvers in Adelaide CTR and VFR AWK training traffic within the lateral limits of the Adelaide CTR below A060, shall be scheduled as follows:

1. MON-FRI 0830-0930 and 1700-1900 local: NOT TO BE PLANNED;
2. MON-FRI 0700-0830, 0930-1100, 1600-1700 and 1900-2100 local normally limited to 1 ACFT at any one time.
3. Remaining AVBL AWK TRNG times: normally no more than 2 ACFT may conduct approaches at any one time.

Note: MON-FRI 1000-1700 local, up to 2 ACFT at any one time may conduct AWK TRNG at Edinburgh in addition to the number of ACFT specified in para (2) and (3) ABV, SUBJ MIL TFC.

- c. Training flights involving an approach to the reciprocal end of the runway nominated for departures are not permitted.
- d. NAVID tacking TRNG and IFR AWK TRNG involving other than published YPAD/IAL procedures is not permitted within the lateral limits of Adelaide CTR.
- e. Circuit training is permitted at Adelaide only BTN 0700-0830, 0930-1700 and 1900-2100 local (extended to 2200 local Daylight Saving). Preferred RWY and preferred flight paths may be waived.

CURFEW 2300-0600 LT

a. Application

1. The Adelaide Airport Curfew Act and Regulations commenced on 27 August 2000. From that time, the curfew provides that between 2300 and 0600 local time no landing or takeoffs are permitted at Adelaide Intl except for the following under paragraphs a., 2., 3., 4., 5., e., f., and g.
2. A maximum of 8 international aircraft (refer to definitions in paragraph h.) landings during curfew shoulder periods (2300-2400 and 0500-0600) may be permitted. Prior approval through the Department of Infrastructure and Transport (DIT) is required for operations in this category; and
3. A maximum of 25 landings and 15 takeoffs each week by low noise heavy freight aircraft (refer paragraph h.) may be permitted. Prior approval through DIT is required; and
4. Propeller driven aircraft with a maximum takeoff weight (MTOW) of 34,000 kg (74,957 lbs) or less, that meet specified ICAO noise standards; and
5. The following types of jet aircraft with a maximum takeoff weight (MTOW) of 34,000 kg (74,957 lbs) or less:

BAe 125-800B	Gulfstream IV
BAe 125-1000	HS125-700B
Beech 400A	Learjet 31A/35/36/45/60
Canadair Challenger 601/604	Mitsubishi MU-300
Cessna Citation 500/525/550/560/650/750	Westwind 1124
Falcon 10/50EX/200/900/200	

These aircraft meet ICAO Chapter 3 noise certification requirements, and comply with the 90-95 noise level rule.

YPAD/ADL


JEPPESEN
 15 FEB 13 **10-4C**
NOISE.
ADELAIDE, SA, AUSTRALIA
 ADELAIDE INTL

NOISE ABATEMENT PROCEDURES

b. Runway Selection

1. Landings by approved international aircraft (refer to para. h.) during the curfew shoulder periods should be on Runway 05, unless meteorological conditions require the aircraft to land on another runway, and aircraft should not use reverse thrust greater than idle reverse thrust.
2. Movements to approved low noise heavy freight aircraft (refer to para. h.) during curfew periods, in relation to
 - (a) takeoffs - must be from Runway 23, and
 - (b) landings - should be on Runway 05 unless the meteorological conditions require the aircraft to land on another runway. Aircraft should not use reverse thrust greater than idle reverse thrust.
3. Where an approved international aircraft (refer to para. h.) or an approved low noise heavy freight aircraft (refer to para. h.) lands on a runway other than Runway 05, the operator of the aircraft must, within 7 days after the landing, give to Airservices Australia a return that states:
 - (a) the date and time of the landing; and
 - (b) the runway on which the landing occurred; and
 - (c) the aircraft's registration mark, its operator, and its type; and
 - (d) the reason for landing on a runway other than Runway 05, including wind conditions at the time; and
 - (e) the down wind limits for landing specified in the aircraft's flight manual.
4. For aircraft other than approved international aircraft and approved low noise heavy freight aircraft, the preferred runways are:
 - Runway 23 for takeoffs; and
 - Runway 05 for landings.
5. When Runway 23 is the duty runway for landing, non-jet aircraft less than 25,000 kg (55,116 lbs) MTOW may land on Runway 12.
6. When Runway 05 is the duty runway for takeoff, non-jet aircraft less than 25,000 kg (55,116 lbs) MTOW may takeoff on Runway 30.
7. In the event of the unavailability of Runway 05/23, the preferred runways are:
 - Runway 30 for takeoffs; and
 - Runway 12 for landings.

c. Preferred Flight Paths

During the curfew, the preferred flight paths described earlier in this document will apply to all arriving and departing aircraft, except single engine aircraft of less than 1750 kg (3858 lbs) MTOW.

d. Takeoff When Taxi Clearance Received Before Start of Curfew Period

An aircraft may takeoff during a curfew period if it received taxi clearance before the start of the curfew period.

e. Use of Adelaide Intl as an Alternate

1. Adelaide Intl may be nominated and used as a planned or unplanned alternate airport during the curfew. In the case of international operations, landings and subsequent takeoffs are permitted during the curfew. For domestic operations, only landings during the curfew are permitted.
2. The use of Adelaide Intl as an alternate during the curfew relates to situations where there is an urgent need for an aircraft to land. If an aircraft uses Adelaide Intl as an alternate, wherever possible, the Noise Abatement Procedures for Adelaide Intl set out in this document should be followed.

YPAD/ADL



15 FEB 13

10-4D

ADELAIDE, SA, AUSTRALIA
ADELAIDE INTL

NOISE ABATEMENT PROCEDURES

f. Exemptions

Curfew restrictions do not apply to an aircraft under the following circumstances, and prior approval from DIT is not required:

1. the aircraft is being used for, or in connection with:
 - (a) a search and rescue operation; or
 - (b) a medical emergency; or
 - (c) a natural disaster; or
2. the pilot of the aircraft has declared an in-flight emergency; or
3. the aircraft has insufficient fuel to be diverted to another airport; or
4. there is an urgent need for the aircraft to land or take off:
 - (a) to ensure the safety or security of the aircraft or any person; or
 - (b) to avoid damage to property.

An aircraft, having landed subject to the above conditions (i.e. dispensation not required), may resume its flight once the emergency has been resolved.

g. Dispensations

1. A dispensation may be granted authorizing an aircraft to land at, or takeoff from, Adelaide Intl in exceptional circumstances. Prior approval from DIT is required.
2. An operator may apply to the Department of Infrastructure and Transport for a dispensation to land at, or takeoff from, Adelaide Airport during the curfew. All dispensation requests should be made through telephone number 1300 307288 (24 hours), or by email to: transport.security@infrastructure.gov.au

h. Definitions

1. An aircraft is an international aircraft if:
 - (a) the aircraft is being used for an international air service to carry passengers or freight (or both) for hire or reward, to or from the airport, and
 - (b) one of the following applies:
 - (i) the operator of the aircraft has an international airline license granted under section 12 of the Air Navigation Act 1920; or
 - (ii) the operator of the aircraft has a permission under section 15D of that Act; or
 - (iii) the operator of the flight in question is covered by a permission under section 17 of that Act; or
 - (iv) the flight in question is covered by a determination under subsection 17 (1B) of that Act; and
 - (c) the aircraft complies with the maximum noise levels specified in Chapter 3 of the Annex that are applicable to the maximum takeoff weight of the aircraft (whether or not the Chapter is expressed to apply to the aircraft); and
 - (d) if the aircraft is being used solely for the purpose of carrying freight - the aircraft is not a low noise heavy freight aircraft; and
 - (e) for a takeoff from Adelaide Airport - the first or second port of call of the aircraft taking off from Adelaide Airport is outside Australia; or
 - (f) for a landing at Adelaide Airport - the last or second last port of call of the aircraft before landing at Adelaide Airport was outside Australia.
2. An aircraft is a low noise heavy freight aircraft if it is a jet aircraft that:
 - (a) has a maximum takeoff weight that is 34,000kg (74,957 lbs) or more; and
 - (b) is being used solely for the purpose of carrying freight; and
 - (c) complies with the maximum noise levels specified in Chapter 3 of the Annex that are applicable to the aircraft (whether or not the Chapter is expressed to the aircraft); and
 - (d) complies with the 90-95 noise level rule.

YPAD/ADL

 **JEPPESEN**
15 FEB 13 (10-4E)

NOISE.
ADELAIDE, SA, AUSTRALIA
ADELAIDE INTL

NOISE ABATEMENT PROCEDURES

i. Further Information

Any inquiries relating to Adelaide Airport curfew arrangements should be directed to the Department of Infrastructure and Transport on telephone number 1300 307 288 during normal office hours.

YPAD/ADL

Apt Elev 20
S34 56.7 E138 31.8

29 AUG 14 (10-9)




ADELAIDE, SA, AUSTRALIA

ADELAIDE INTL

ATIS		ADELAIDE Clearance	Ground	Tower
116.4	134.5	126.1	121.7	120.5

ADELAIDE Approach (Dep) (R) within 36 NM:	
NW of Rwy 05-23	SE of Rwy 05-23
124.2	118.2

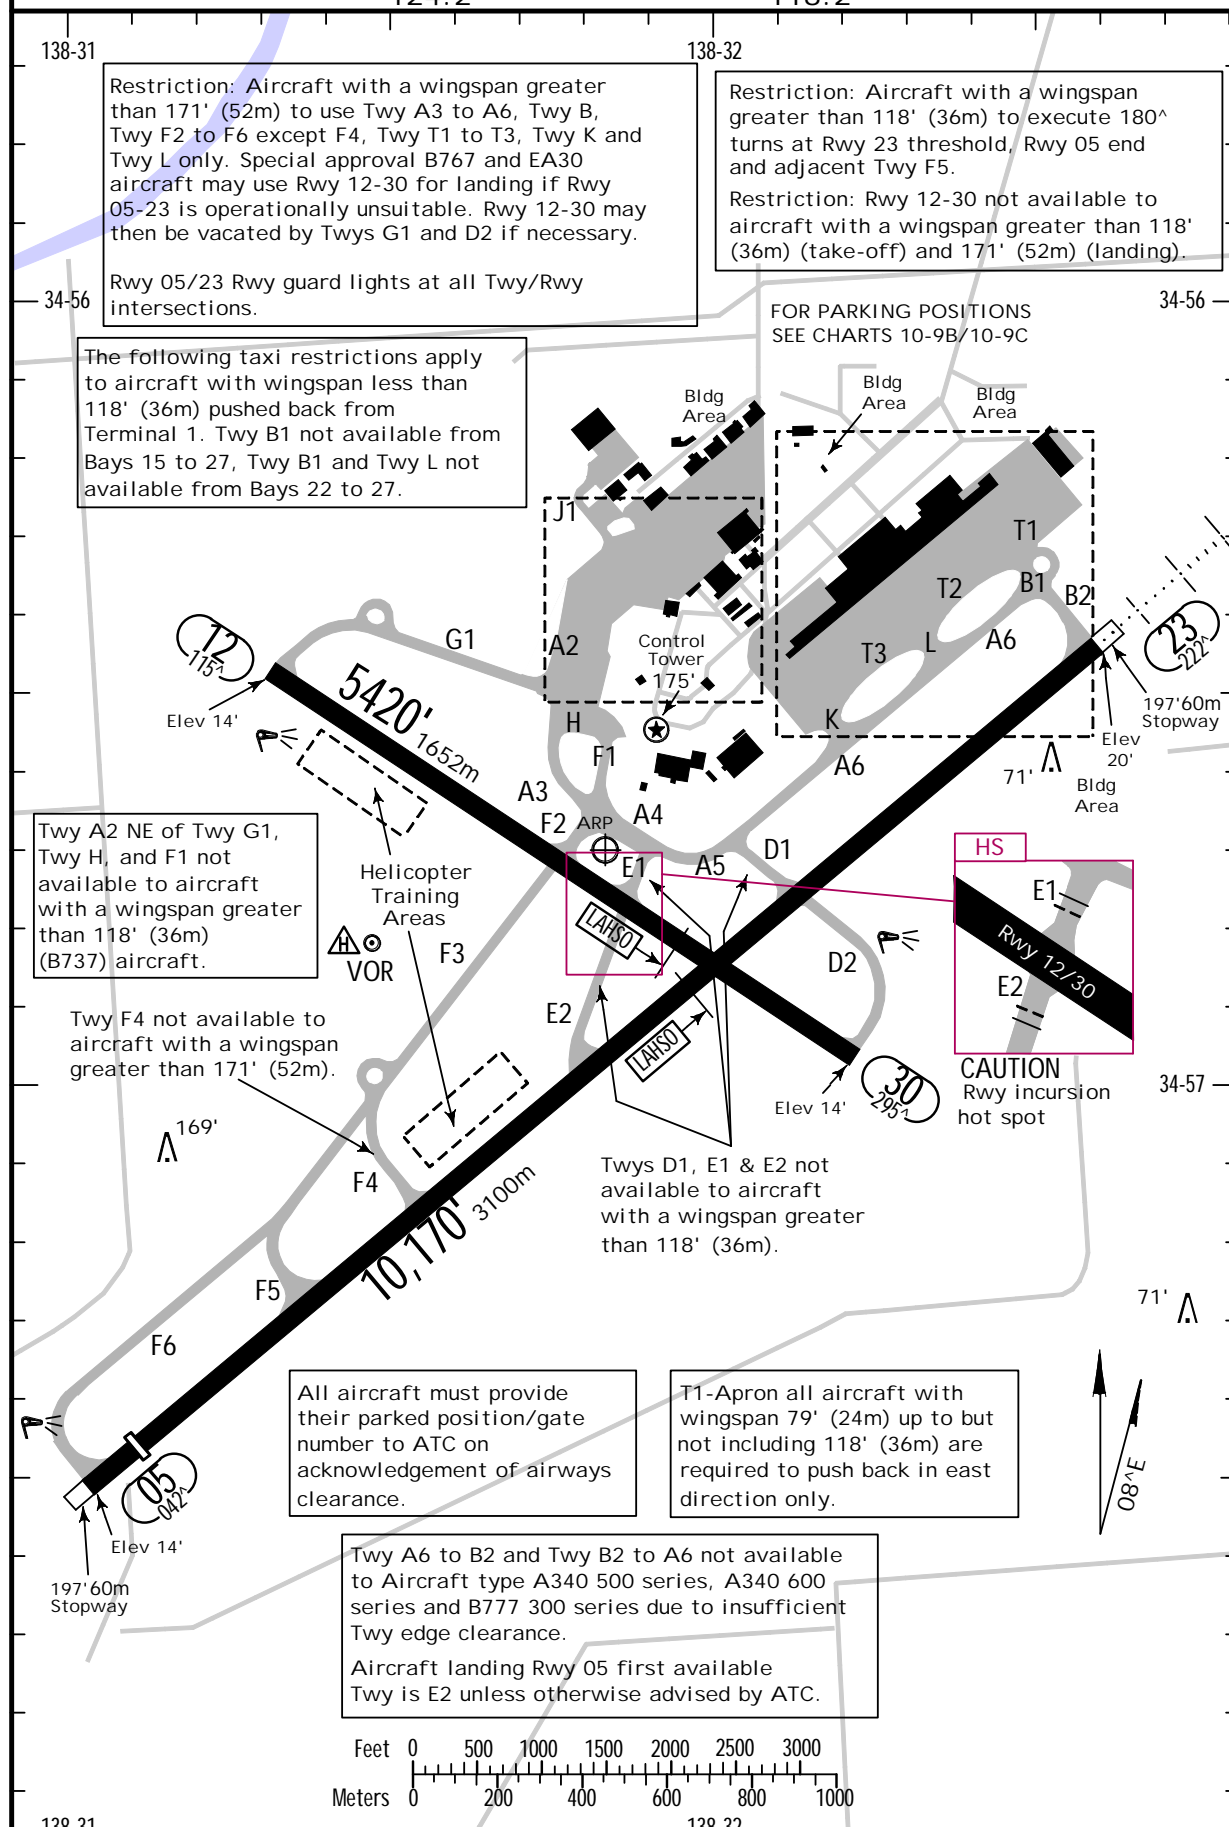

YPAD/ADL



ADELAIDE, SA, AUSTRALIA

29 AUG 14

10-9A

ADELAIDE INTL

GENERAL

Birds in vicinity of airport.

Jet aircraft curfew 2300-0600LT.

Engine start involving use of more than idle power requires ATC clearance.

ADDITIONAL RUNWAY INFORMATION

RWY		USABLE LENGTHS			TAKE-OFF	WIDTH
		LANDING BEYOND		LAHSO		
		Threshold	Glide Slope	Distance		
05 1	3 HIRL 3 PAPI (angle 3.0°, MEHT 61')	9678' 2950m		12/30 5492' 1674m		148'
2						45m
23	3 HIRL HIALS (non-std) 3 4 PAPI		9122' 2780m			

1 Hold short lights Rwy 05.

2 Grooved.

3 Standby power available.

4 Angle 3.0°, MEHT 59'

12 5	6 MIRL 6 7 PAPI	grooved		05/23 3727' 1136m		148'
30						45m

5 Hold short lights Rwy 12.

6 Standby power available.

7 Angle 3.0°, MEHT 51'

TAKE-OFF

All Rwy's

STANDARD

With RL & either CL or RCLM

Other

1 Eng	300' - 2 km	
2, 3 & 4 Eng	Single pilot acft without auto-feathering. Acft not above 5700 kg & not capable of Engine out climb gradient of 1.9%. 300' - 2 km	
2, 3 & 4 Eng	550m	800m

FOR FILING AS ALTERNATE

Special		ILS or LOC Rwy 23	RNAV-Z (GNSS) Rwy 05
		VOR Rwy 05	RNAV-Z (GNSS) Rwy 12
		VOR Rwy 12	RNAV-Z (GNSS) Rwy 23
		VOR Rwy 30	RNAV-Z (GNSS) Rwy 30
		VOR Rwy 05	
		VOR Rwy 12	
		VOR Rwy 23	
		VOR Rwy 30	
A	850' - 4.0 km	1380' - 4.4 km	
		1480' - 6.0 km	
		1480' - 7.0 km	

1 Aircraft capable of 3.6% missed approach procedure only.

YPAD/ADL




JEPPESEN

ADELAIDE, SA, AUSTRALIA

17 AUG 12 (10-9B) .Eff.23.Aug.

ADELAIDE INTL

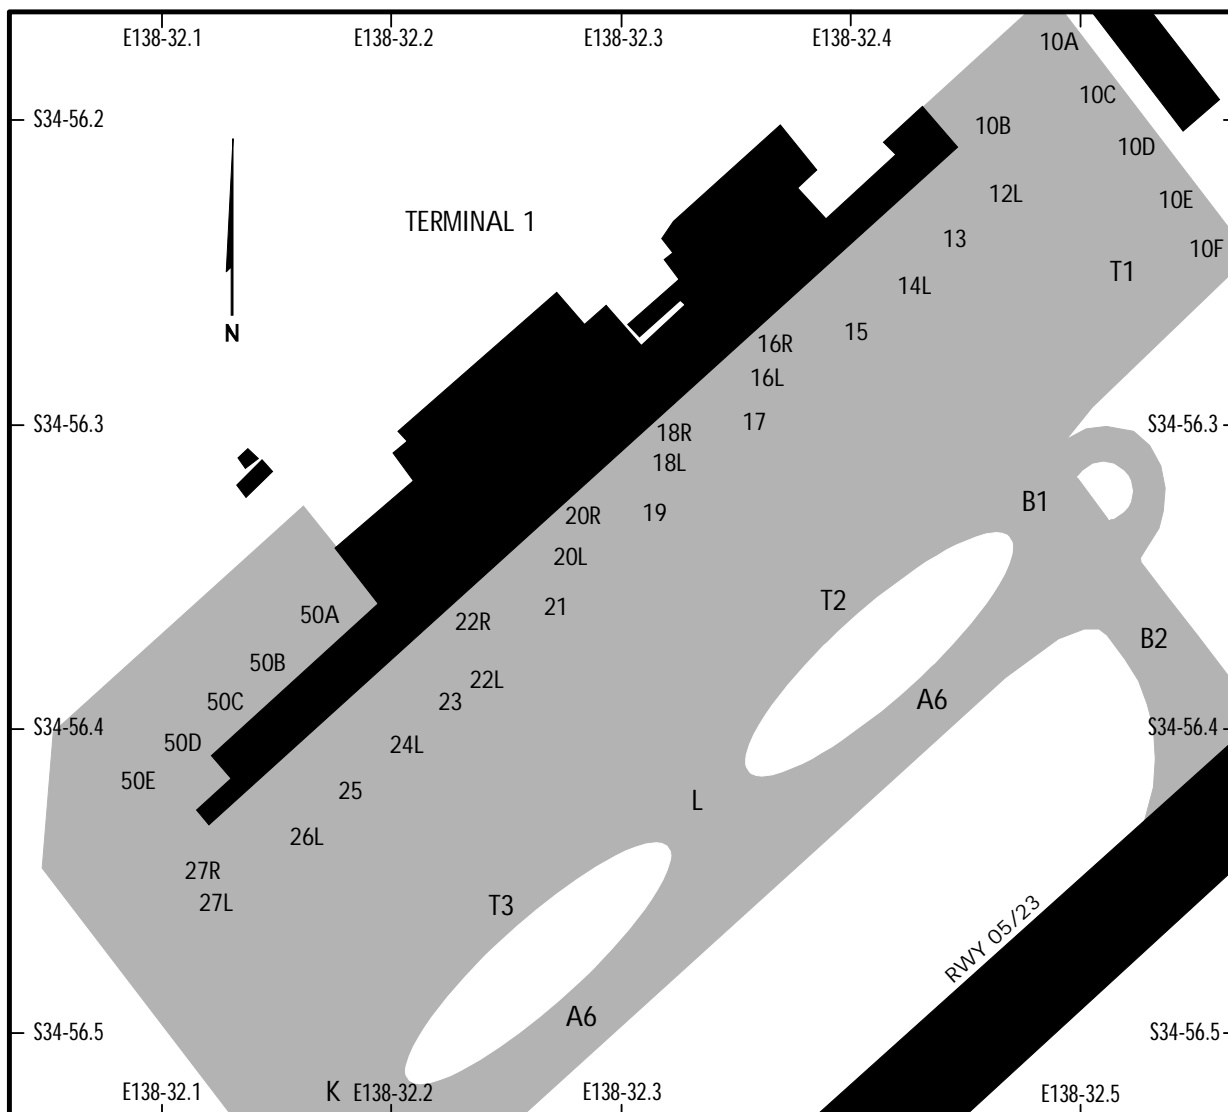

PARKING POSITION INFORMATION

STAND No.	COORDINATES	ELEV	STAND No.	COORDINATES	ELEV
10A thru 10C	S34 56.2 E138 32.5	20	18L	S34 56.3 E138 32.3	19
10D, 10E	S34 56.2 E138 32.5	19	19	S34 56.4 E138 32.3	19
10F	S34 56.3 E138 32.5	19	20R	S34 56.4 E138 32.3	20
12L	S34 56.2 E138 32.5	19	20L	S34 56.4 E138 32.3	19
13 thru 15	S34 56.3 E138 32.4	19	21	S34 56.4 E138 32.3	19
16R	S34 56.3 E138 32.4	20	22R	S34 56.4 E138 32.2	20
16L	S34 56.3 E138 32.4	19	22L	S34 56.4 E138 32.2	19
17	S34 56.3 E138 32.3	19	23 thru 25	S34 56.4 E138 32.2	19
18R	S34 56.3 E138 32.3	20	26L	S34 56.5 E138 32.1	19
			27R	S34 56.5 E138 32.1	20
			27L	S34 56.5 E138 32.1	19
			50A	S34 56.4 E138 32.2	18
			50B thru 50E	S34 56.4 E138 32.1	18

YPAD/ADL



JEPPESEN


ADELAIDE, SA, AUSTRALIA

17 AUG 12

10-9C

.Eff.23.Aug.

ADELAIDE INTL

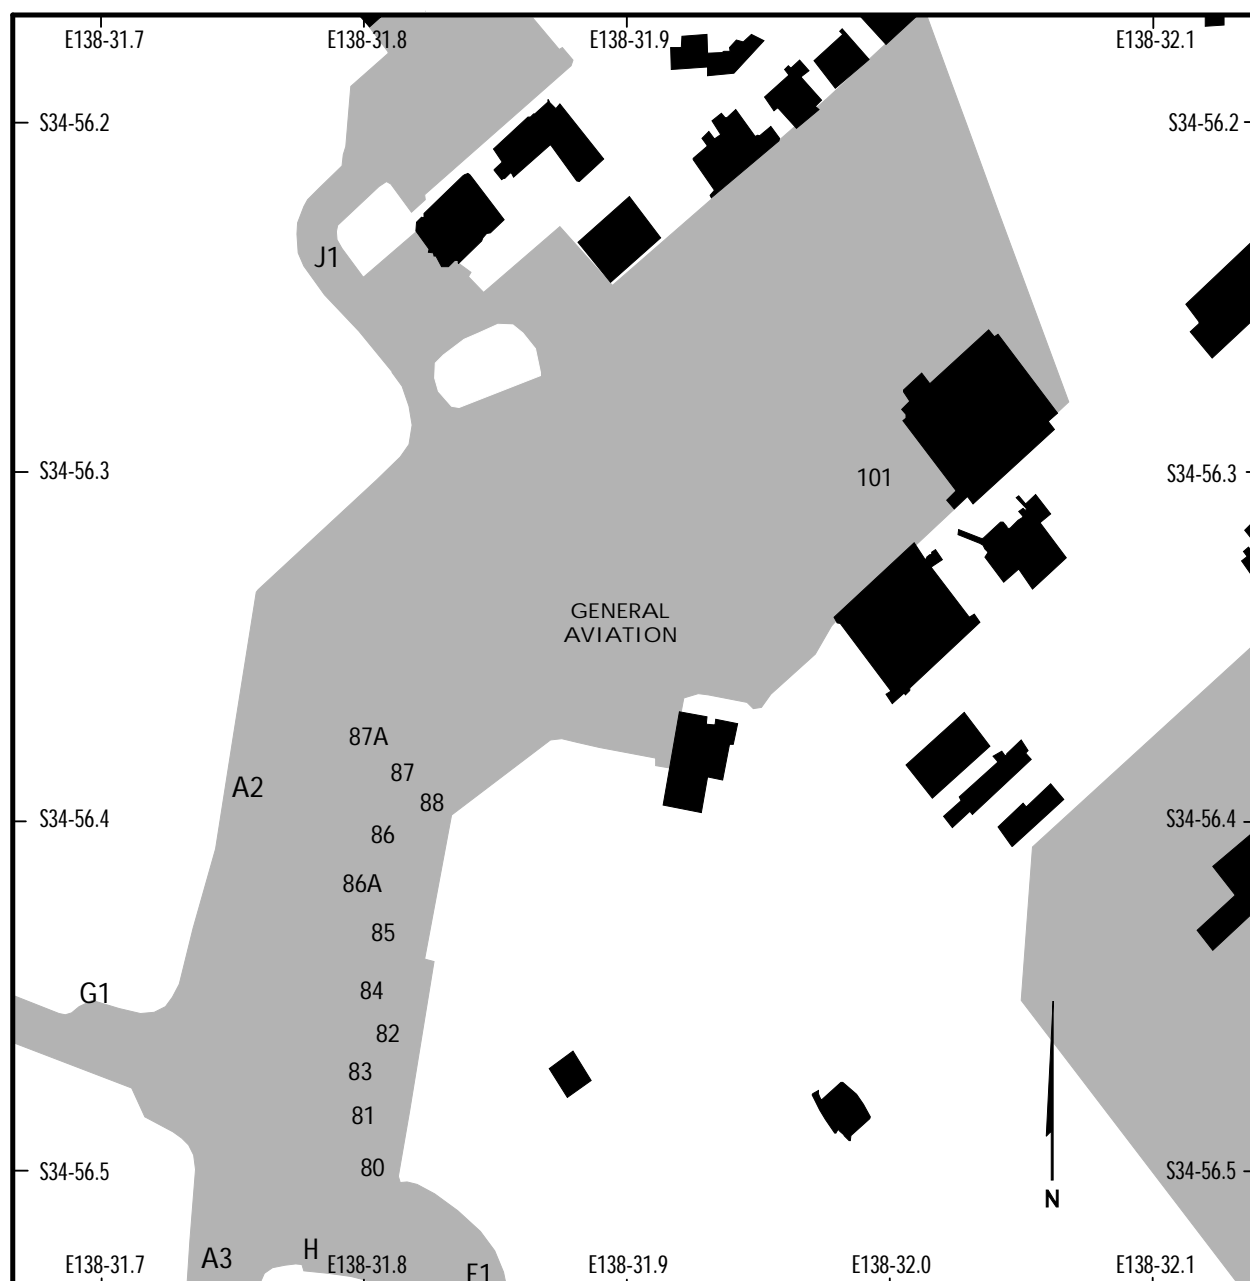

PARKING POSITION INFORMATION

STAND No.	COORDINATES	ELEV			
80, 81, 82	S34 56.5 E138 31.8	15			
83, 84	S34 56.5 E138 31.8	15			
85	S34 56.4 E138 31.8	15			
101	S34 56.3 E138 32.0	16			

YPAD/ADL



26 JUN 09

10-9D

ADELAIDE, SA, AUSTRALIA

ADELAIDE INTL

VISUAL DOCKING GUIDANCE SYSTEM

AIRCRAFT POSITIONING AND INFORMATION SYSTEM (APIS)

1. APIS is a Nose-In Guidance (NIG) system installed at Adelaide Airport Terminal 1 - Bays 12L, 13, 14L, 15, 16R, 16L, 18R, 18L, 19, 20R, 20L, 21, 22R, 22L, 23, 24L, 25 and 26L (it is NOT installed at Bay 17). The APIS is based on a centerline guidance sub-display. The steering and stop indications are provided from a display unit mounted on a pole in front of the cockpit in line with the left-hand pilot seat. The parking bay position identification is mounted on top of the guidance pole.
2. On approach to the parking position, the pilot will see the display box face showing two rows of yellow alpha-numeric characters on a black background across the top, an illuminated closing-rate 'thermometer' at the lower left and an illuminated azimuth guidance display at the lower right. The alpha-numeric characters on the top row should be flashing (see diagram on 10-9E).
3. The following is the sequence of APIS operation from initial approach to STOP:
 - a. Identify the correct parking bay position.
 - b. Ensure that the aerobridge retraction light indicates green.
 - c. Follow the taxi-in line and watch the centerline beacon.
 - d. Check that the correct aircraft type is flashing and that the door number is shown (where applicable).
 - e. About 66' (20m) before STOP, the 'aircraft type' display goes steady and the door number disappears.
 - f. Follow the azimuth guidance display. The black arrowheads indicate which direction to steer for the centerline. When the aircraft is properly aligned in azimuth, the black vertical bar will be displayed.
 - g. The full closing rate 'thermometer' indicates at least 43' (13m) to STOP.
 - h. When the aircraft reaches 43' (13m) to STOP, the 'thermometer' bar lights begin to move from bottom to top.
 - i. The deletion of each 'thermometer' bar indicates about one-and-a-half feet (one-half meter) progression.
 - j. When the STOP position is reached, all the closing rate 'thermometer' lights extinguish and the lower display indicates STOP. If the aircraft is parked correctly, the top display indicates OK.
 - k. If the aircraft overshoots the limit for correct parking, the top display indicates TOO FAR (alternating TOO then FAR).
 - l. The entire display automatically shuts down after some seconds.

NOTE: When the last row of lights of the closing rate 'thermometer' is extinguished and the word STOP is displayed, the aircraft should be at a standstill.

YPAD/ADL



26 JUN 09


10-9E

ADLAIDE, SA, AUSTRALIA

ADLAIDE INTL

VISUAL DOCKING GUIDANCE SYSTEM

APIS Diagram

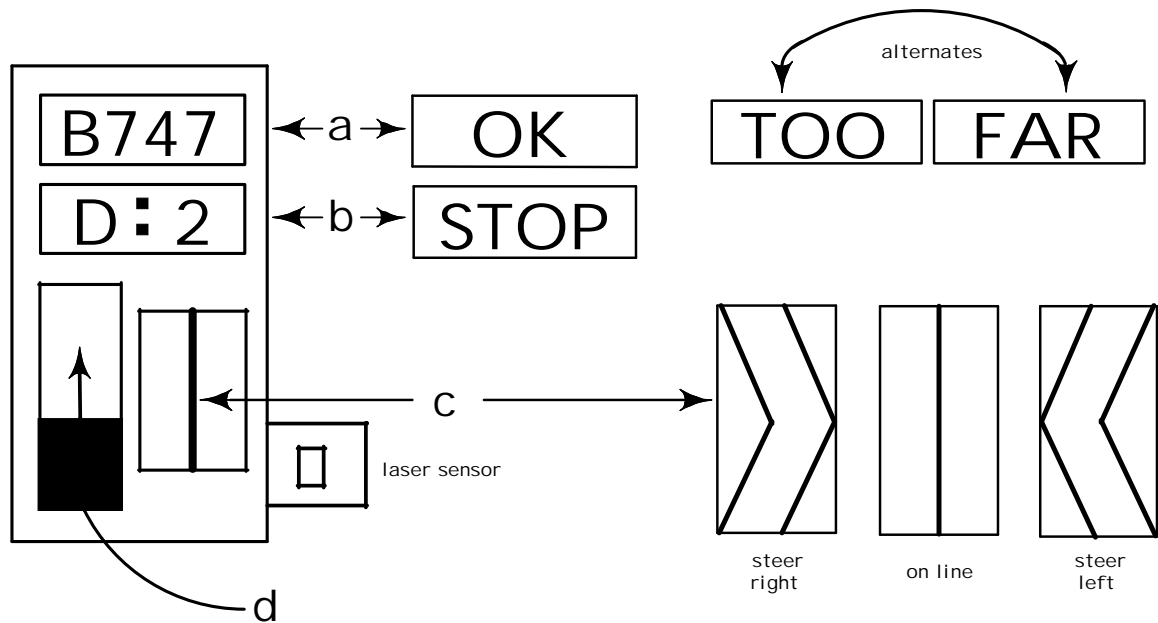

- a. Display: ACFT type, OK or TOO/FAR.
- b. Display: Door Number or STOP.
- c. Centerline Beacon: Steering guidance.
- d. 'Thermometer': Closing rate indication - stopping guidance.


NOTE: The lettering is yellow on a black background. The 'thermometer' is yellow and goes black from bottom to top. The centerline beacon is a central black band surrounded by yellow.


YPAD/ADL
ADELAIDE INTL

JEPPESSEN
9 MAY 14 (11-1)


ADELAIDE, SA, AUSTRALIA
ILS or LOC Rwy 23

BRIEFING STRIP


ATIS		ADELAIDE Approach (R) Within 36 NM: SE of Rwy 05-23 NW of Rwy 05-23		ADELAIDE Tower		Ground				
116.4 134.5		118.2 124.2		120.5		121.7				
LOC IAD 109.7		Final Apch Crs 222^		GS OM 1310' (1290')		ILS DA(H) 270' (250')		Apt Elev 20' Rwy 23 20'		
MISSED APCH: Track 222^, climb to 3000' or as directed by ATC.										
Alt Set: hPa Rwy Elev: 1 hPa Trans level: FL 110 Trans alt: 10000'										
1. GNSS permitted in lieu of DME. Reference waypoint AD VOR.										

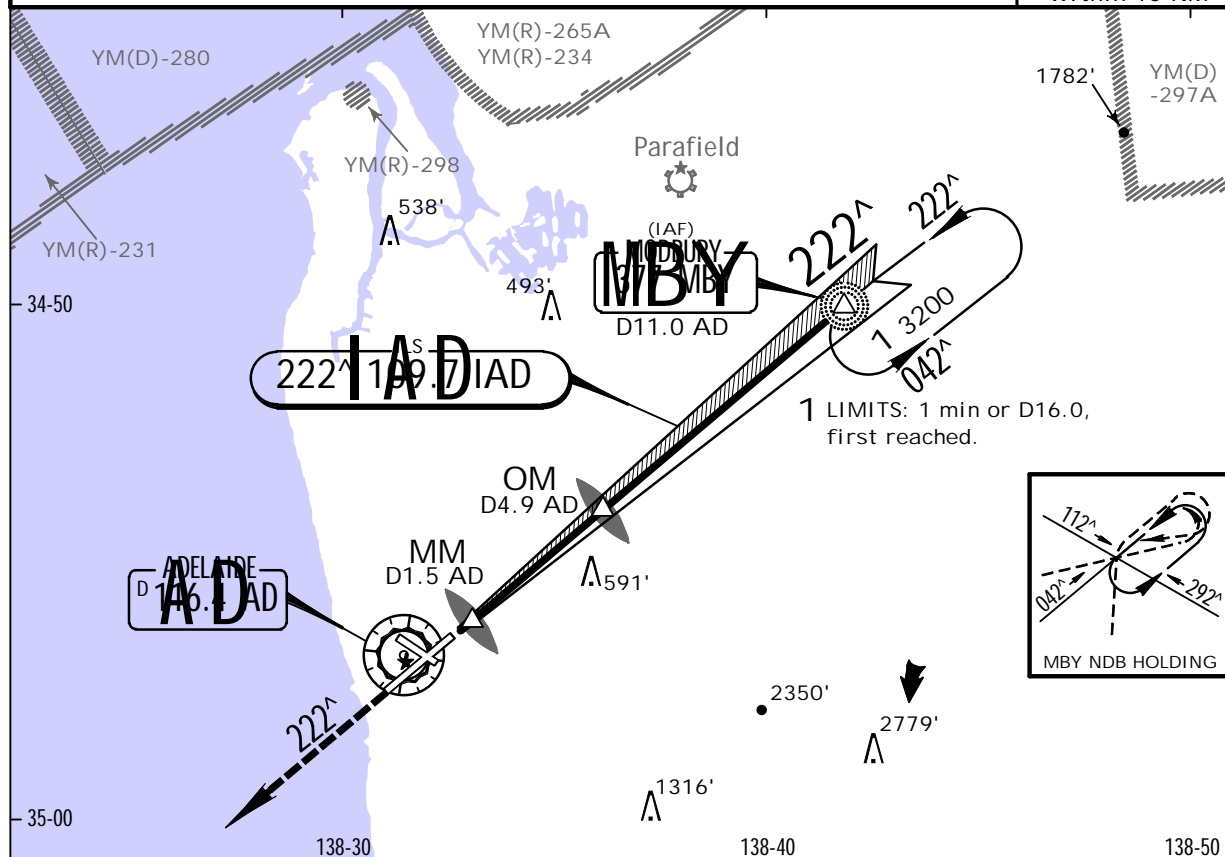


LOC (GS out)	AD DME	3.2	4.0	5.0	6.0	7.0	8.0	9.0	10.0	10.8
	ALTITUDE	770'	1030'	1350'	1670'	1990'	2310'	2630'	2950'	3200'

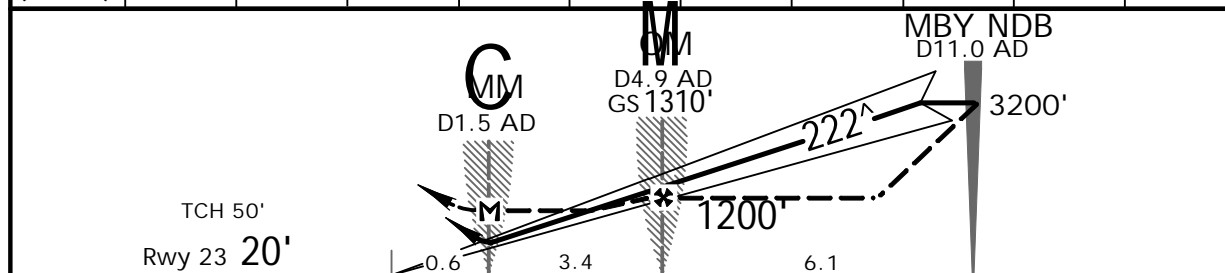

Gnd speed-Kts	70	90	100	120	140	160	
GS	3.00 [^]	372	478	531	637	743	
MAP at MM							

STRAIGHT-IN LANDING RWY 23						CIRCLE-TO-LAND		
ILS			LOC (GS out)			Max Kts	MDA(H)	
DA(H) 270' (250')			MDA(H) 770' (750')					
FULL		HIRL out	HIALS out	HIALS out				
A						100	900' (880')-2.4 km	
B						135		
C	0.8 km	1.2 km	1.5 km	3.4 km	4.3 km	180	1000' (980')-4.0 km	
D								
E								

No Circling beyond 4 DME AD South of Runway 05-23 or beyond 3 NM of



No Circling beyond
4 DME AD South of
Runway 05-23 or
beyond 3 NM of

YPAD/ADL

ADELAIDE INTL


15 AUG 14
Eff. 21 Aug.


JEPPESSEN

(12-1)


ADELAIDE, SA, AUSTRALIA
RNAV-Z (GNSS) Rwy 05


BRIEFING STRIP™


ATIS		ADELAIDE Approach (R) Within 36 NM: SE of Rwy 05-23 NW of Rwy 05-23		ADELAIDE Tower		Ground	
116.4	134.5	118.2	124.2	120.5		121.7	
RNAV	Final Apch Crs 042^	Procedure Alt PADSF 1580' (1566')	MDA(H) 520' (506')	Apt Elev 20' Rwy 05 14'			
MISSED APCH: Track direct to PADSH, thence track 042^, climb to 3800', or as directed by ATC.							
Alt Set: hPa		Rwy Elev: 1 hPa		Trans level: FL 110		Trans alt: 10000'	
1. Max IAS for initial: 230 Kts.							
MSA AD VOR 3800' within 10 NM							

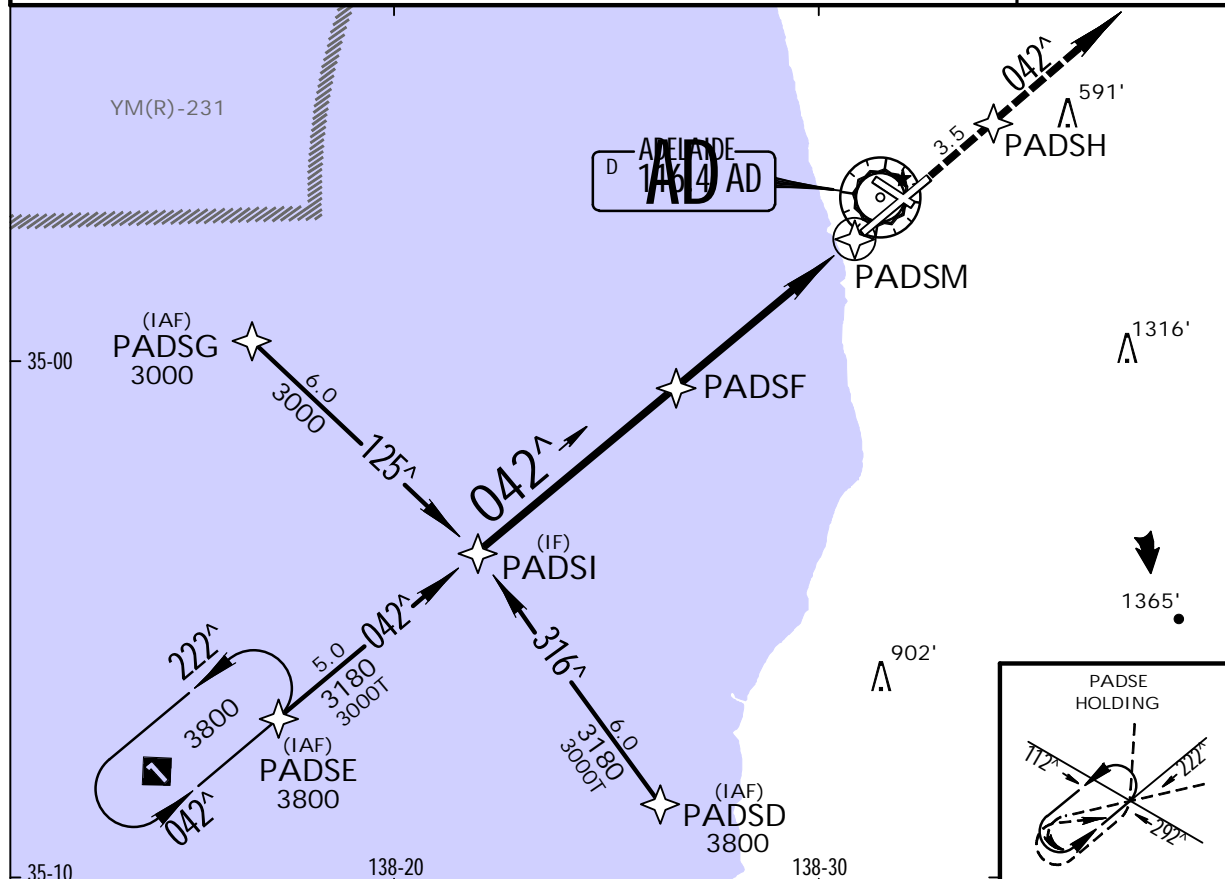

NM to NEXT WPT	2.0	PADSI	4.4	4.0	3.0	2.0	1.0	PADSF	4.0	3.0	2.0	1.2	PADSM
ALTITUDE	3800'	3180'	3000'	2860'	2540'	2220'	1900'	1580'	1420'	1110'	790'	520'	

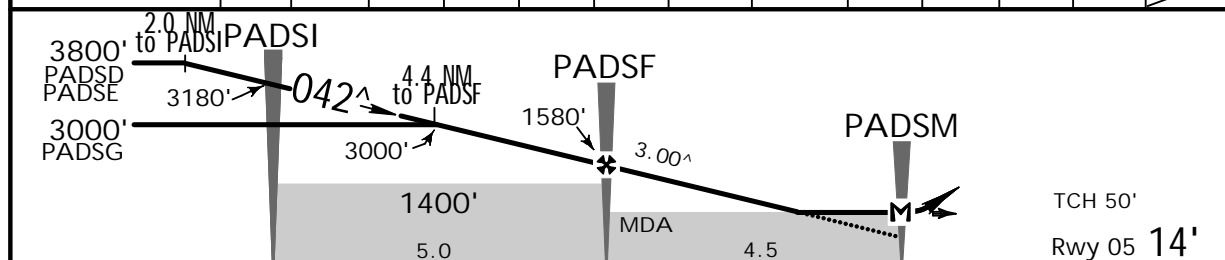

Gnd Speed-Kts	70	90	100	120	140	160			PAPI		PADSH
Descent Angle	3.00°	372	478	531	637	743	849				
MAP at PADSM											

STRAIGHT-IN LANDING RWY05				CIRCLE-TO-LAND				
MDA(H) 520' (506')								
A	2.8 km			Max Kts.	MDA(H)			
B				100	900'(880') -2.4 km			
C				135				
				180	1000'(980') -4.0 km			
</								

YPAD/ADL

ADELAIDE INTL

15 AUG 14
Eff. 21 Aug.


JEPPESSEN

(12-2)


ADELAIDE, SA, AUSTRALIA
RNAV-Z (GNSS) Rwy 12

BRIEFING STRIP


ATIS	116.4	134.5	ADELAIDE Approach (R) Within 36 NM: SE of Rwy 05-23 NW of Rwy 05-23	118.2	124.2	ADELAIDE Tower	120.5	Ground	121.7
RNAV		Final Apch Crs 115^	Procedure Alt PADWF 1660' (1646')		MDA(H) 550' (536')	Apt Elev 20' Rwy 12 14'			
MISSED APCH: Turn RIGHT, track direct to PADWH, thence track 140^. Climb to 3800' or as directed by ATC.									
Alt Set: hPa Rwy Elev: 1 hPa Trans level: FL 110 Trans alt: 10000'									
1. Max IAS for initial 210 Kts, for missed approach turn: 190 Kts.									MSA YPAD ARP 3800' within 10 NM

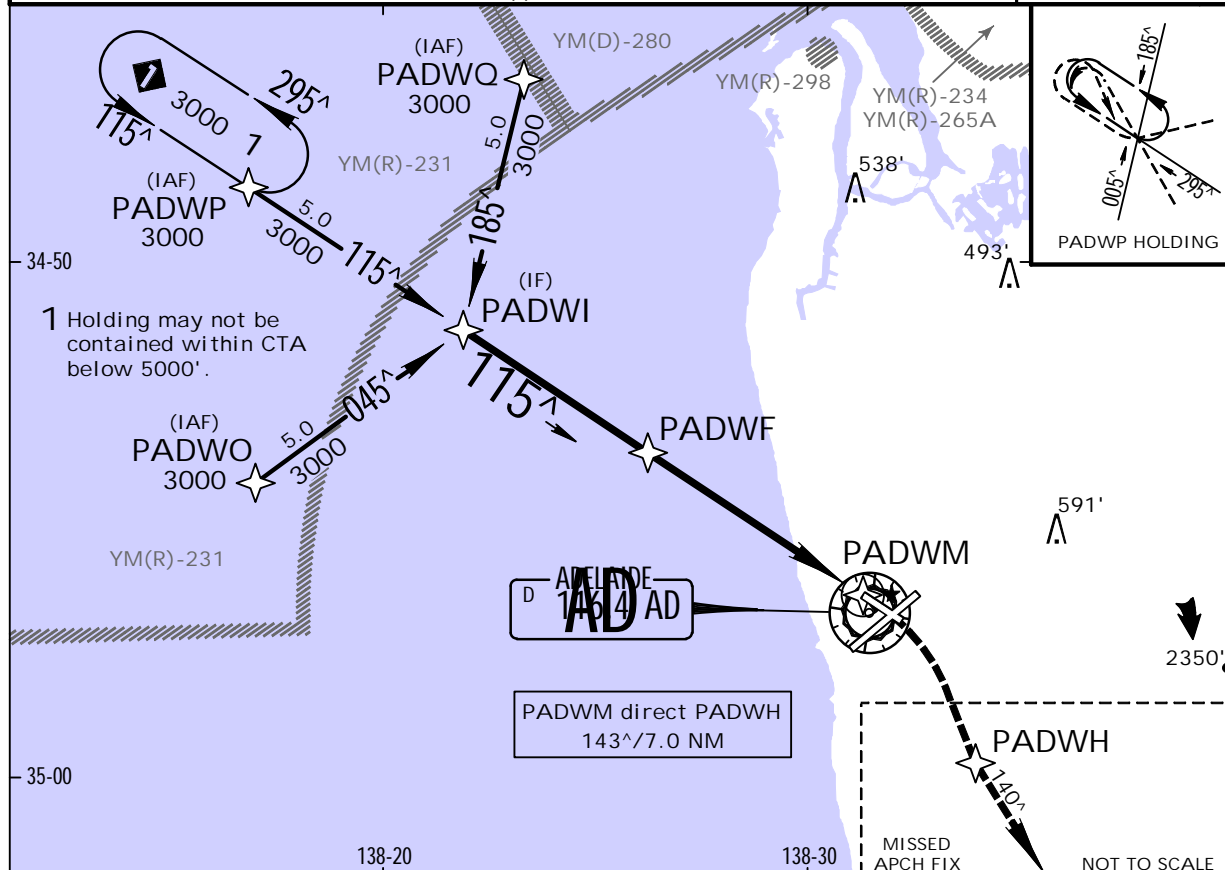

NM to NEXT WPT	PADWI	4.0	3.0	2.0	1.0	PADWF	4.0	3.0	2.0	1.5	PADWM
ALTITUDE	3000'	2930'	2610'	2290'	1970'	1660'	1340'	1020'	700'	550'	

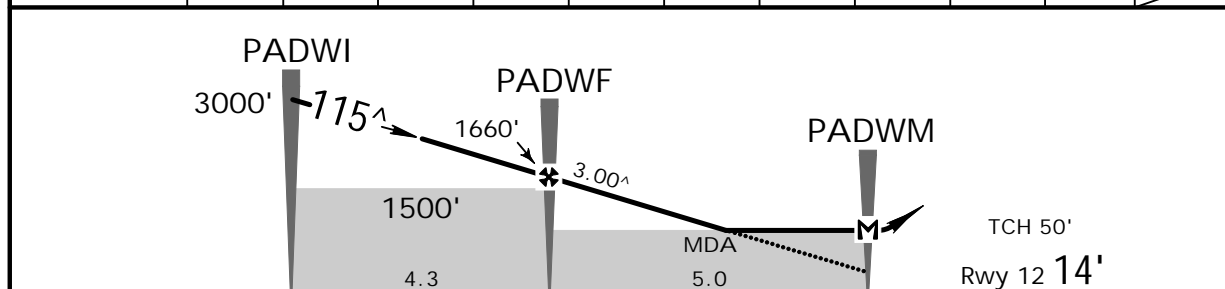

Gnd speed-Kts	70	90	100	120	140	160					
Descent Angle	3.00^	372	478	531	637	743	849				
MAP at PADWM											

STRAIGHT-IN LANDING RWY 12		CIRCLE-TO-LAND		 <p>No Circling beyond 4 DME AD South of Rwy 05-23 or beyond</p>
MDA(H) 550' (536')		Max Kts	MDA(H)	
A	3.0 km	100	900'(880')-2.4 km	
B		135		
C		180	1000'(980')-4.0 km	

YPAD/ADL

ADELAIDE INTL


15 AUG 14
Eff. 21 Aug.


JEPPESSEN

(12-3)


ADELAIDE, SA, AUSTRALIA
RNAV-Z (GNSS) Rwy 23

BRIEFING STRIP


ATIS		ADELAIDE Approach (R) Within 36 NM: SE of Rwy 05-23 NW of Rwy 05-23		ADELAIDE Tower		Ground		
116.4 134.5		118.2 124.2		120.5		121.7		
RNAV	Final Apch Crs 222^	Procedure Alt PADNF 2620' (2600')	MDA(H) 580' (560')	Apt Elev 20' Rwy 23 20'				
MISSED APCH: Track direct to PADNH, thence track 222^, climb to 3800', or as directed by ATC.							<div>MSA AD VOR 3800' within 10 NM</div>	
Alt Set: hPa		Rwy Elev: 1 hPa		Trans level: FL 110		Trans alt: 10000'		
1. Max IAS for initial: 210 Kts.								

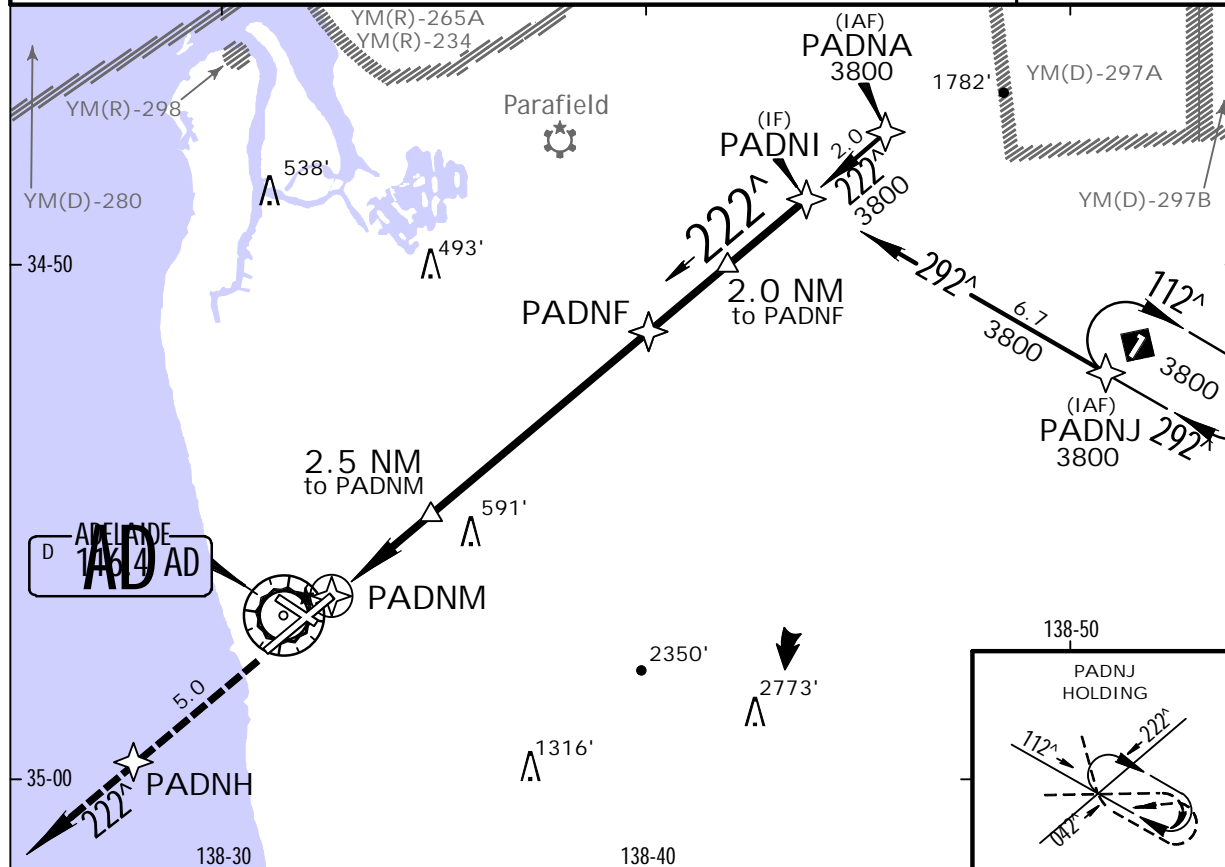

NM to NEXT WPT	PADNM	1.6	2.0	2.5	3.0	4.0	5.0	6.0	7.0	PADNF	1.0	2.0	3.7
Altitude		580'	710'	870'	1030'	1340'	1660'	1980'	2300'	2620'	2930'	3250'	3800'

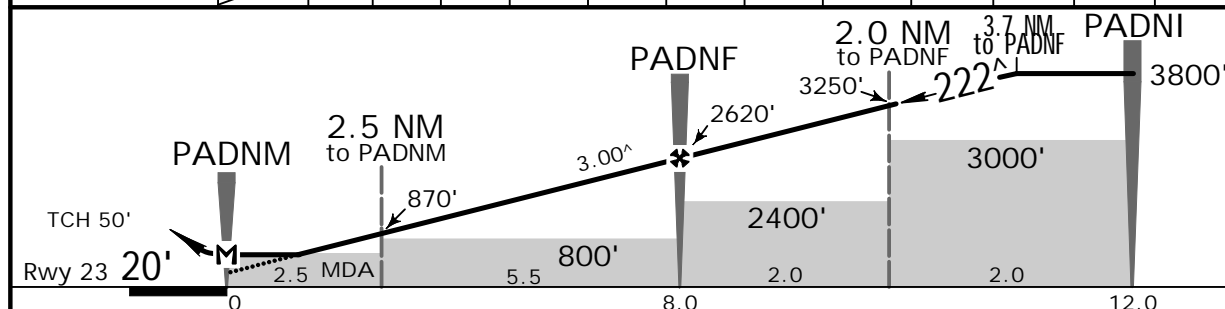

Gnd speed-Kts	70	90	100	120	140	160	HIALS			PADNH
Descent Angle	3.00°	372	478	531	637	743	849			
MAP at PADNM										

STRAIGHT-IN LANDING RWY 23		CIRCLE-TO-LAND		
MDA(H) 580' (560')				
HIALS out		Max Kts	MDA(H)	
A	3.2 km	100	900'(880')-2.4 km	
B		135		
C		180	1000'(980')-4.0 km	

IS OPS

YPAD/ADL


ADELAIDE INTL

15 AUG 14
Eff. 21 Aug.

JEPPESEN

(12-4)


ADELAIDE, SA, AUSTRALIA
RNAV-Z (GNSS) Rwy 30

ATIS	ADELAIDE Approach (R) Within 36 NM: SE of Rwy 05-23 NW of Rwy 05-23		ADELAIDE Tower		Ground
116.4	134.5	118.2	124.2	120.5	121.7
RNAV	Final Apch Crs 295 [^]	Procedure Alt PADEF 2860' (2846')	MDA(H) 620' (606')	Apt Elev 20' Rwy 30 14'	


MISSED APCH: Track direct to PADEF, thence track 295[^]. Climb to 3800', or as directed by ATC.

Alt Set: hPa Rwy Elev: 1 hPa Trans level: FL 110 Trans alt: 10000'
1. Max IAS for initial: 210 Kts. 2. Approach path angle does not coincide with PAPI on glide slope indication.


MSA YPAD ARP
3800'
within 10 NM

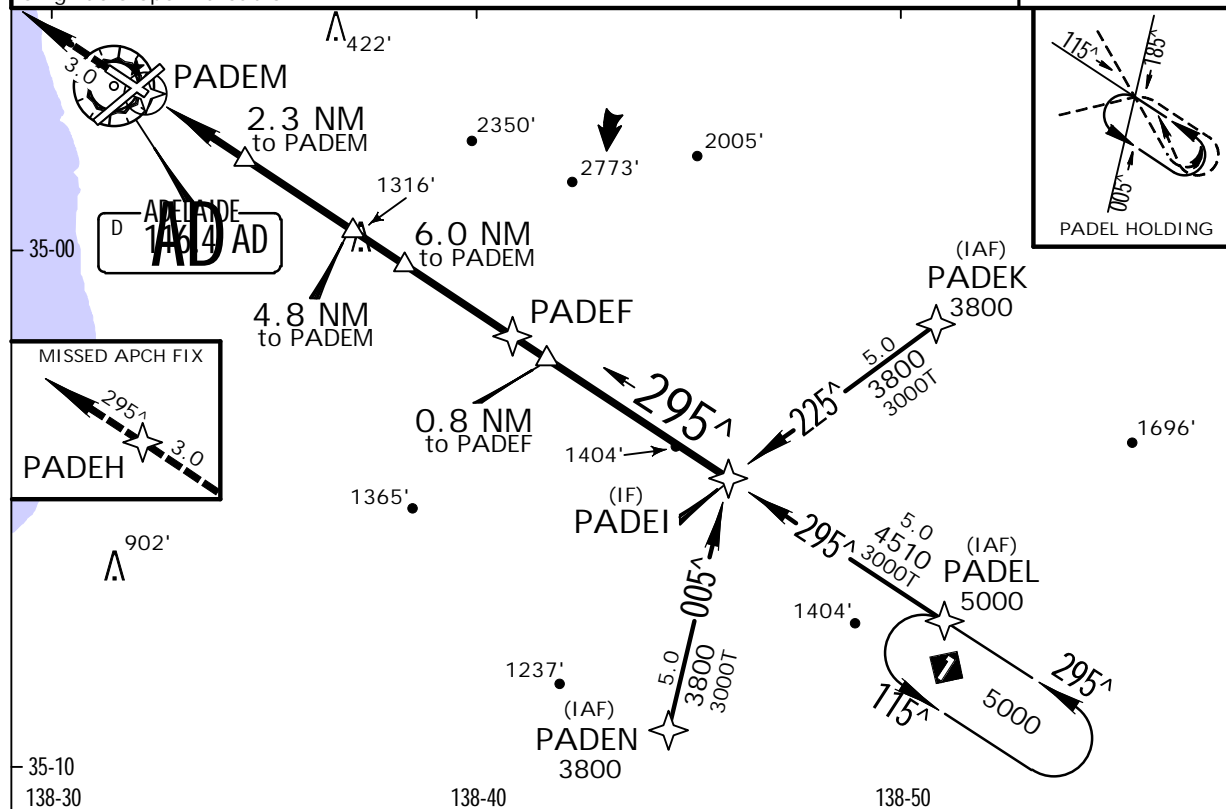

NM to NEXT WPT	PADEM	1.7	2.3	3.0	4.0	4.8	6.0	7.0	PADEF	0.8	2.8	PADEI	1.5
ALTITUDE		620'	820'	1050'	1380'	1640'	2040'	2370'	2860'	3120'	3800'	4510'	5000'

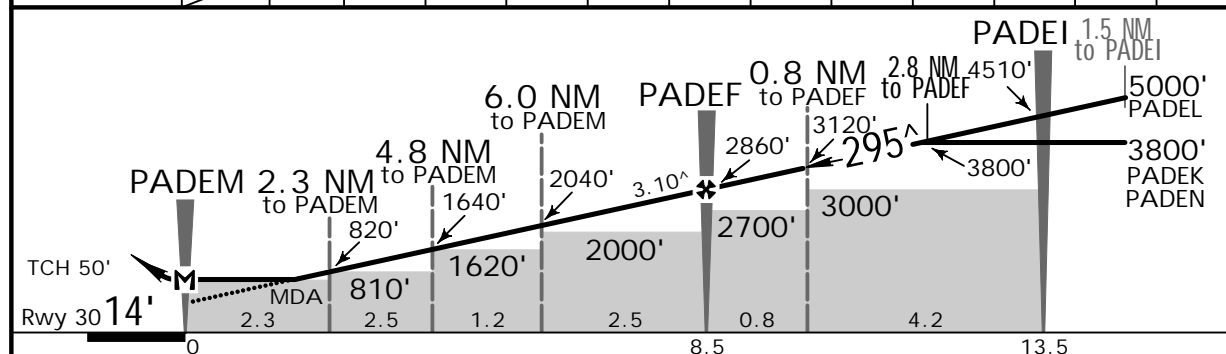

Gnd Speed-Kts	70	90	100	120	140	160			PAPI	PADEH	
Descent Angle	3.10 [^]	384	494	548	658	768	878				
MAP at PADEM											

STRAIGHT-IN LANDING RWY30		CIRCLE-TO-LAND			
MDA(H) 620' (606')		Max Kts.	MDA(H)		<p>No Circling beyond 4 DME AD South of Runway 05-23 or</p>
A	3.3 km	100	900'(880') -2.4 km		
B		135			
C		180	1000'(980') -4.0 km		

YPAD/ADL

ADELAIDE INTL

12-20

JEPPESEN


24 MAY 13
Eff. 29 May 1600Z

MISSED APCH CLIMB
GRADIENT MIN 7.3%


ADELAIDE, SA, AUSTRALIA
RNAV-M (RNP) Rwy 05

CAT C & D

ATIS	ADELAIDE Approach (R) Within 36 NM:			ADELAIDE Tower	Ground
116.4 134.5	SE of Rwy 05-23	118.2	NW of Rwy 05-23	120.5	121.7
RNAV RNV M 05	Final Apch Crs 042°	Procedure Alt BATIP 1500' (1486')	RNP DA(H) Refer to Minimums	Apt Elev Rwy 05 20' 14'	
MISSED APCH: Track via the RNAV (RNP) missed approach track to NUMKI, then track 042°. Climb to 3800' or as directed by ATC. Acceleration altitude 1500' QNH.					
Alt Set: hPa Rwy Elev: 1 hPa Trans level: FL 110 Trans alt: 10000' 1. FOR CASA APPROVED OPERATORS ONLY. 2. RF REQUIRED. 3. Local QNH REQUIRED. 4. Local temperature REQUIRED. 5. Procedure temperature range 0°C (32°F) to 43°C (109°F). 6. Lateral transition to missed approach must not be initiated prior to DA(H) position. 7. Procedure available up to maximum landing weight.					




ENGINE OUT MISSED APCH: Track via the RNAV (RNP) Engine Out Missed Approach track to FINNS and hold as published.
Acceleration altitude 1500' QNH (1500' AGL). Climb to 3000', or as directed by ATC.

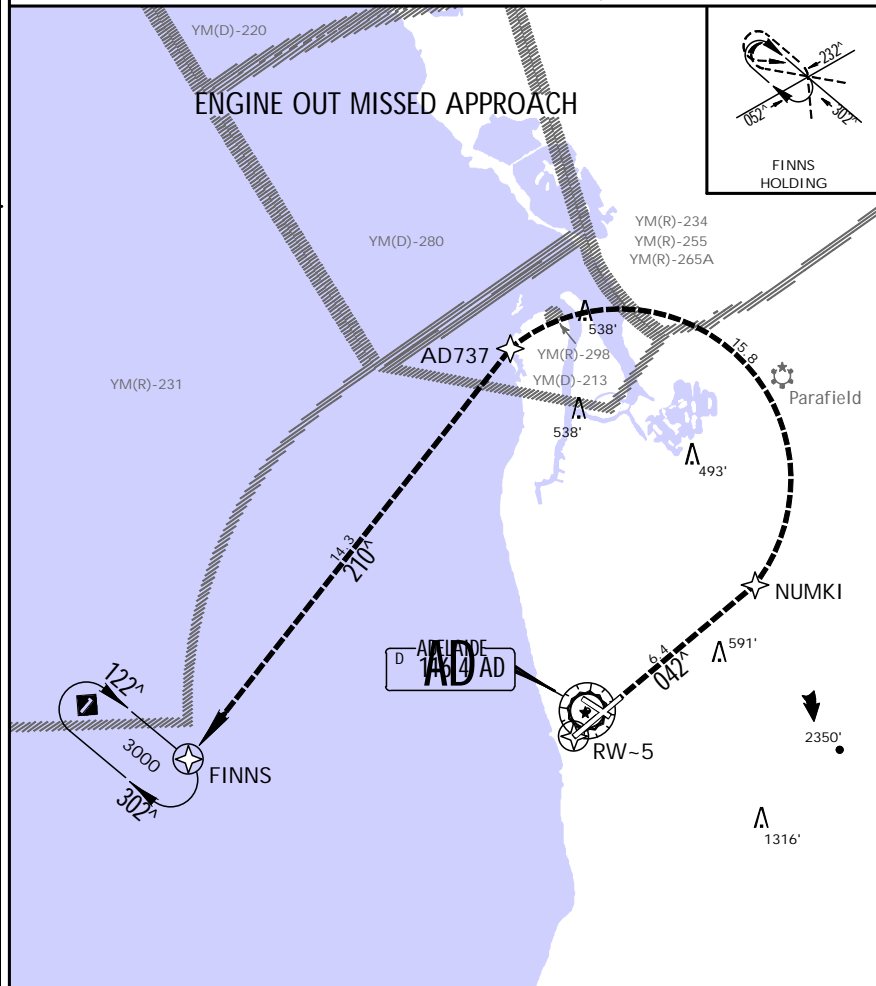


Gnd speed-Kts	70	90	100	120	140	160			
Descent angle [3.00°]	372	478	531	637	743	849			
MAP at DA									

STRAIGHT-IN LANDING RWY 05 Missed apch climb gradient (All Engines) min 7.3% to 3800'			RNP 0.10			RNP 0.30		
1 CAT C: DA(H) 436' (422')			1 CAT C: DA(H) 497' (483')			1 CAT C: DA(H) 497' (483')		
2 CAT C/D: DA(H) 441' (427')			2 CAT C/D: DA(H) 502' (488')			2 CAT C/D: DA(H) 502' (488')		
C	2.2 km			2.6 km				
C/D								

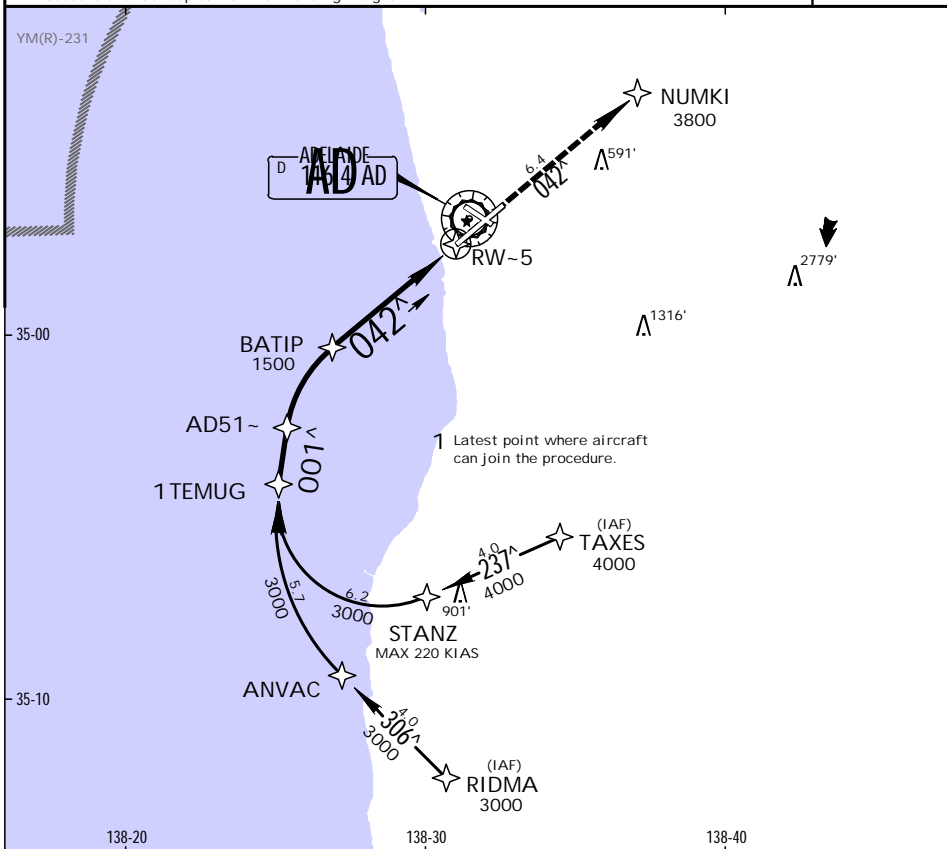

Dist to Threshold	TEMUG	AD51~	BATIP	1.4	1.2
ALTITUDE (3.0° APCH PATH)	3000'	2400'	1500'	502'	436'

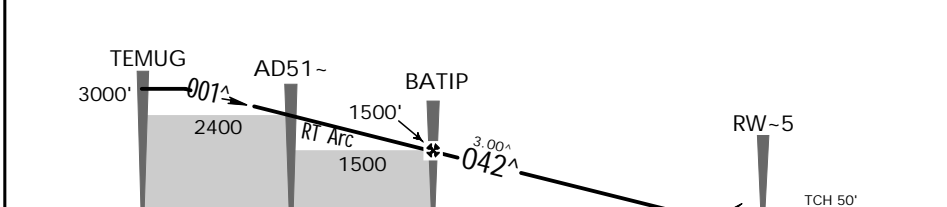


YPAD/ADL

ADELAIDE INTL

ATIS		ADELAIDE Approach (R) Within 36 NM:		ADELAIDE Tower		Ground
116.4	134.5	SE of Rwy 05-23	118.2	NW of Rwy 05-23	124.2	121.7
RNAV RNP P 05		Final Apch Crs 042°	Procedure Alt BATIP 1500' (1486')	RNP DA(H) Refer to Minimums	Apt Elev Rwy 05 20' 14'	

MISSED APCH: Track via the RNAV (RNP) missed approach track to NUMKI, then track 042°. Climb to 3800' or as directed by ATC.
Acceleration altitude 1500' ONH.


- Alt Set: hPa Rwy Elev: 1 hPa Trans level: FL 110 Trans alt: 10000'
1. FOR CASA APPROVED OPERATORS ONLY. 2. RF REQUIRED. 3. Local QNH REQUIRED.
 4. Local temperature REQUIRED.
 5. Procedure temperature range 0°C (32°F) to 43°C (109°F).
 6. Lateral transition to missed approach must not be initiated prior to DA(H) position.
 7. Procedure available up to maximum landing weight.



MSA AD VOR
3800'
within 10 NM



Dist to Threshold	FINNS	AD525	BATIP	1.4	1.2
ALTITUDE (3.0° APCH PATH)	4140'	3060'	1500'	502'	436'

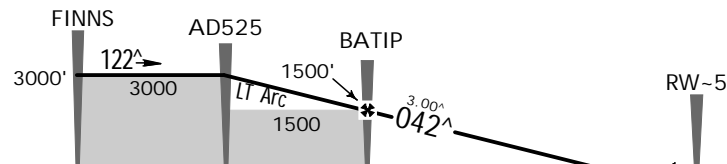


24 MAY 13
JEPPesen
Eff. 29 May 1600Z (12-21)

MISSED APCH CLIMB
GRADIENT MIM 7.3%

ADELAIDE, SA, AUSTRALIA
RNAV-P (RNP) Rwy 05

ENGINE OUT MISSED APCH: Track via the RNAV (RNP) Engine Out Missed Approach track to FINNS and hold as published.
Acceleration altitude 1500' ONH (1500' AGL). Climb to 3000', or as directed by ATC.

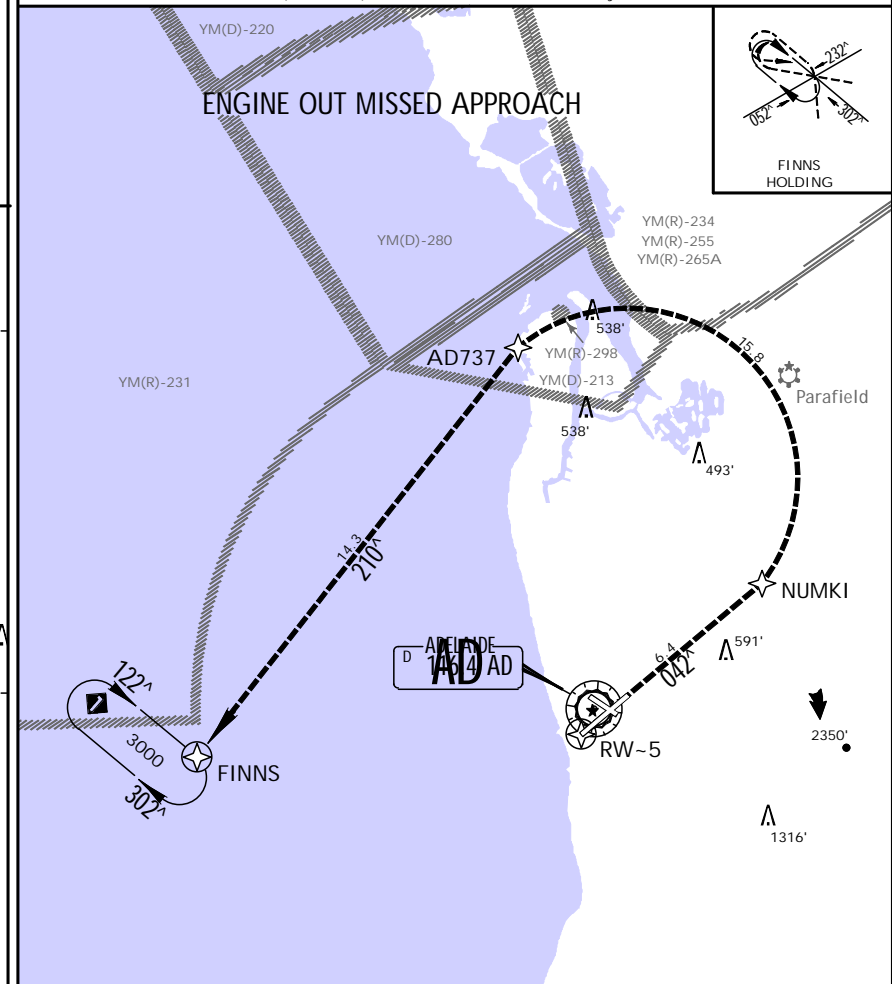

Gnd speed-Kts	70	90	100	120	140	160			PAPI	042°	NUMKI
Descent angle [3.00°]	372	478	531	637	743	849					
MAP at DA											

STRAIGHT-IN LANDING RWY 05		Missed apch climb gradient (All Engines) mim 7.3% to 3800'	
RNP 0.10		RNP 0.30	
1 CAT C: DA(H) 436' (422°)		1 CAT C: DA(H) 497' (483°)	
2 CAT C/D: DA(H) 441' (427°)		2 CAT C/D: DA(H) 502' (488°)	
C	2.2 km		2.6 km
C/D			

2 MVD-2 (2 engine wide-body aircraft)

YPAD/ADL

ADELAIDE INTL

12-22

JEPPesen

24 MAY 13





Eff. 29 May 1600Z

MISSED APCH CLIMB
GRADIENT MIN 5.6%

ADELAIDE, SA, AUSTRALIA
RNAV-M (RNP) Rwy 23

CAT C & D

ATIS	ADELAIDE Approach (R) Within 36 NM:			ADELAIDE Tower	Ground
116.4 134.5	SE of Rwy 05-23	118.2	NW of Rwy 05-23	120.5	121.7
RNAV RNV M 23	Final Apch Crs 222°	Procedure Alt NUMKI 1600' (1580')	RNP DA(H) Refer to Minimums	Apt Elev Rwy 23 20'	20'
MISSED APCH: Track via the RNAV (RNP) missed approach track to BATIP, then track 222°. Climb to 3000' or as directed by ATC. Acceleration altitude 1500' QNH.					
Alt Set: hPa Rwy Elev: 1 hPa Trans level: FL 110 Trans alt: 10000' 1. FOR CASA APPROVED OPERATORS ONLY. 2. RF REQUIRED. 3. Local QNH REQUIRED. 4. Local temperature REQUIRED. 5. Procedure temperature range 0°C (32°F) to 43°C (109°F). 6. Lateral transition to missed approach must not be initiated prior to DA(H) position. 7. Procedure available up to maximum landing weight.					

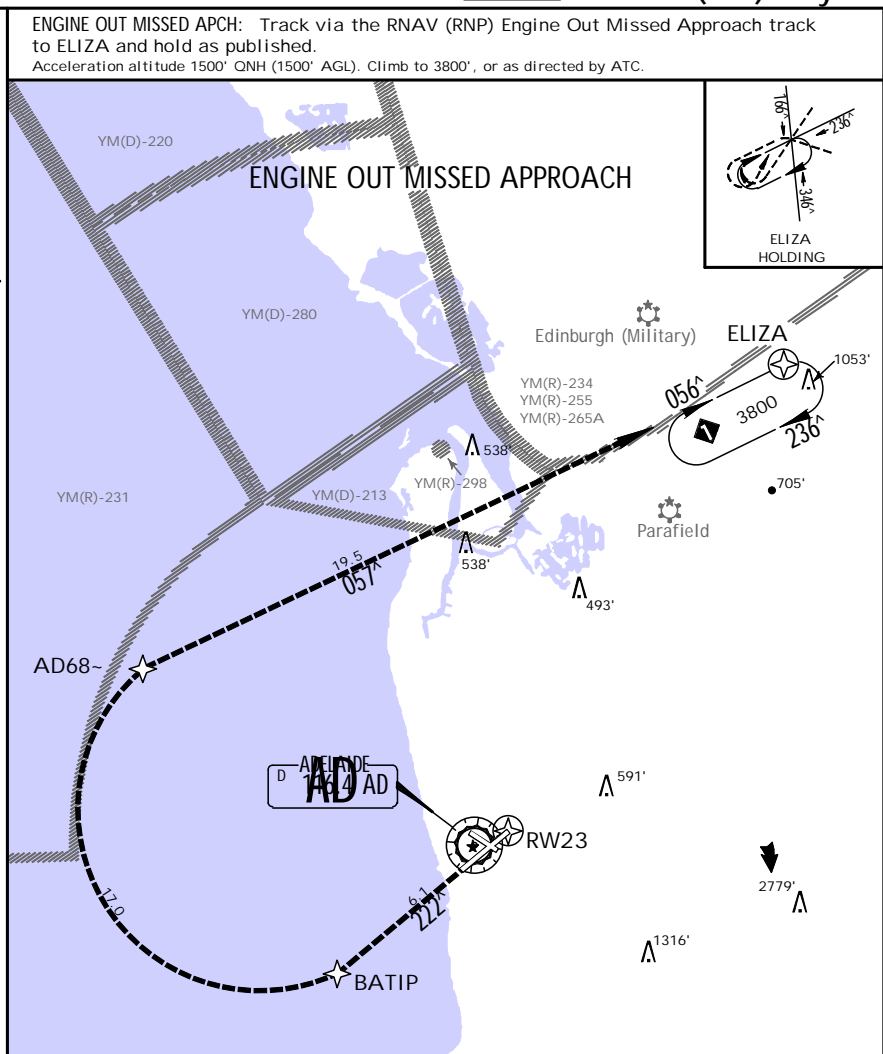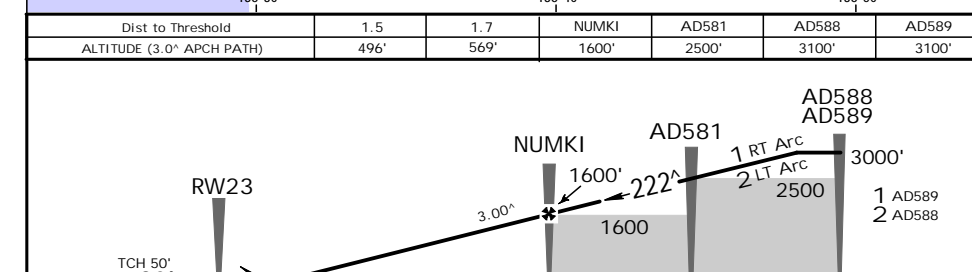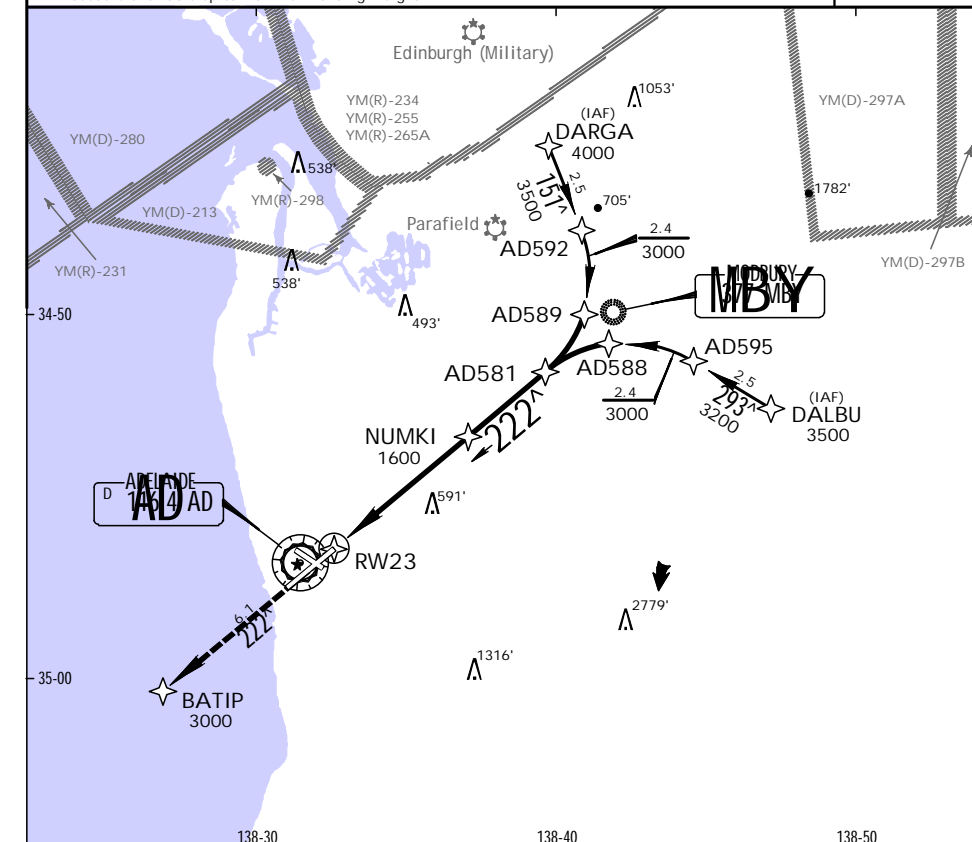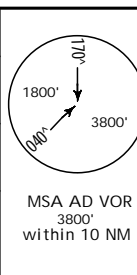

Gnd speed-Kts	70	90	100	120	140	160		<div>HIALS PAPI PAPI</div>	222 [^]	BATIP	
Descent angle [3.00°]	372	478	531	637	743	849					
MAP at DA											
STRAIGHT-IN LANDING RWY 23											
Missed apch climb gradient (All Engines) mim 5.6% to 3000'											
RNP 0.15											
RNP 0.30											
1 CAT C: DA(H) 496' (476')						1 CAT C: DA(H) 563' (543')					
2 CAT C/D: DA(H) 500' (480')						2 CAT C/D: DA(H) 569' (549')					
HIRL out						HIRL out					
HIRL out						HIRL out					
C	1.7 km						2.1 km				
C/D	1.7 km						2.1 km				

YPAD/ADL



ADELAIDE INTL

24 MAY 13
Eff. 29 May 1600Z (12-23)
JEPPESEN
MISSED APCH CLIMB GRADIENT MIN 5.6%
ADELAIDE, SA, AUSTRALIA
RNAV-P (RNP) Rwy 23
[CAT C & D]

ATIS	ADELAIDE Approach (R) Within 36 NM:			ADELAIDE Tower	Ground
116.4 134.5	SE of Rwy 05-23 118.2	NW of Rwy 05-23 124.2		120.5	121.7
RNAV RNV P 23	Final Apch Crs 222°	Procedure Alt NUMKI 1600' (1580')	RNP DA(H) Refer to Minimums	Apt Elev Rwy 23 20'	
MISSED APCH: Track via the RNAV (RNP) missed approach track to BATIP, then track 222°. Climb to 3000' or as directed by ATC. Acceleration altitude 1500' QNH.					
Alt Set: hPa Rwy Elev: 1 hPa Trans level: FL 110 Trans alt: 10000' 1. FOR CASA APPROVED OPERATORS ONLY. 2. RF REQUIRED. 3. Local QNH REQUIRED. 4. Local temperature REQUIRED. 5. Procedure temperature range 0°C (32°F) to 43°C (109°F). 6. Lateral transition to missed approach must not be initiated prior to DA(H) position. 7. Procedure available up to maximum landing weight.					
				MSA AD VOR 3800' within 10 NM	



Dist to Threshold	1.5	1.7	NUMKI	AD578	AD587	GUSKO
ALTITUDE (3.0° APCH PATH)	496'	569'	1600'	2550'	4210'	5480'

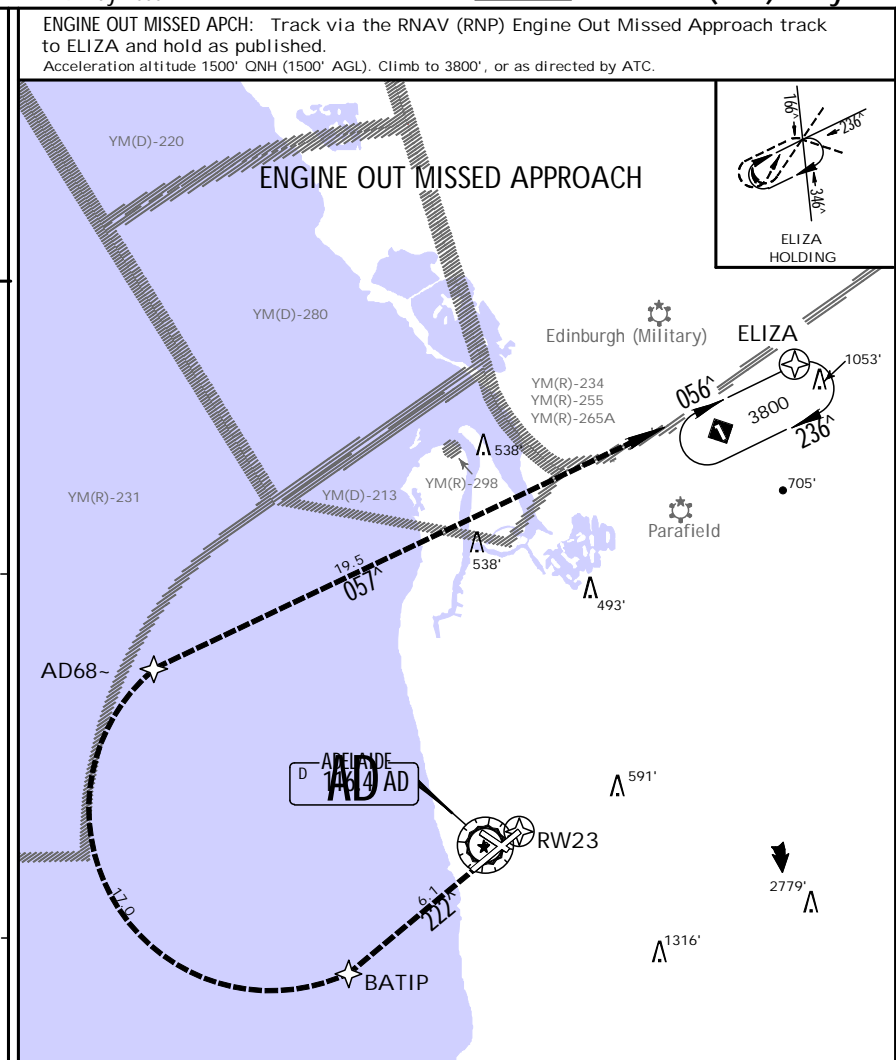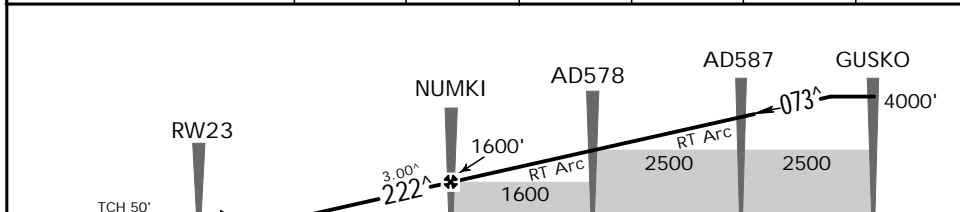

Gnd speed-Kts	70	90	100	120	140	160				
Descent angle [3.00°]	372	478	531	637	743	849				
MAP at DA										

STRAIGHT-IN LANDING RWY 23 Missed apch climb gradient (All Engines) min 5.6% to 3000'				RNP 0.30			
1 CAT C: DA(H) 496' (476')				1 CAT C: DA(H) 563' (543')			
2 CAT C/D: DA(H) 500' (480')				2 CAT C/D: DA(H) 569' (549')			
HIRL out				HIRL out			
1.7 km				2.1 km			

YPAD/ADL

ADELAIDE INTL

12-24

JEPPESEN

24 MAY 13

Eff. 29 May 1600Z

MISSED APCH CLIMB
GRADIENT MIN 5.6%

ADELAIDE, SA, AUSTRALIA

CAT C & D


RNAV-U (RNP) Rwy 23

ATIS	ADELAIDE Approach (R) Within 36 NM:			ADELAIDE Tower	Ground
116.4 134.5	SE of Rwy 05-23	118.2	NW of Rwy 05-23	120.5	121.7
RNAV RNV U 23	Final Apch Crs 222°	Procedure Alt NUMKI 1600' (1580')	RNP DA(H) Refer to Minimums	Apt Elev Rwy 23 20'	20'


MISSED APCH: Track via the RNAV (RNP) missed approach track to BATIP, then track 222°. Climb to 3000' or as directed by ATC.

Acceleration altitude 1500' QNH.


Alt Set: hPa Rwy Elev: 1 hPa Trans level: FL 110 Trans alt: 10000'
1. FOR CASA APPROVED OPERATORS ONLY. 2. RF REQUIRED. 3. Local QNH REQUIRED.
4. Local temperature REQUIRED. 5. Procedure temperature range 0°C (32°F) to 43°C (109°F).
6. Lateral transition to missed approach must not be initiated prior to DA(H) position.
7. Procedure available up to maximum landing weight.




MSA AD VOR
3800'
within 10 NM

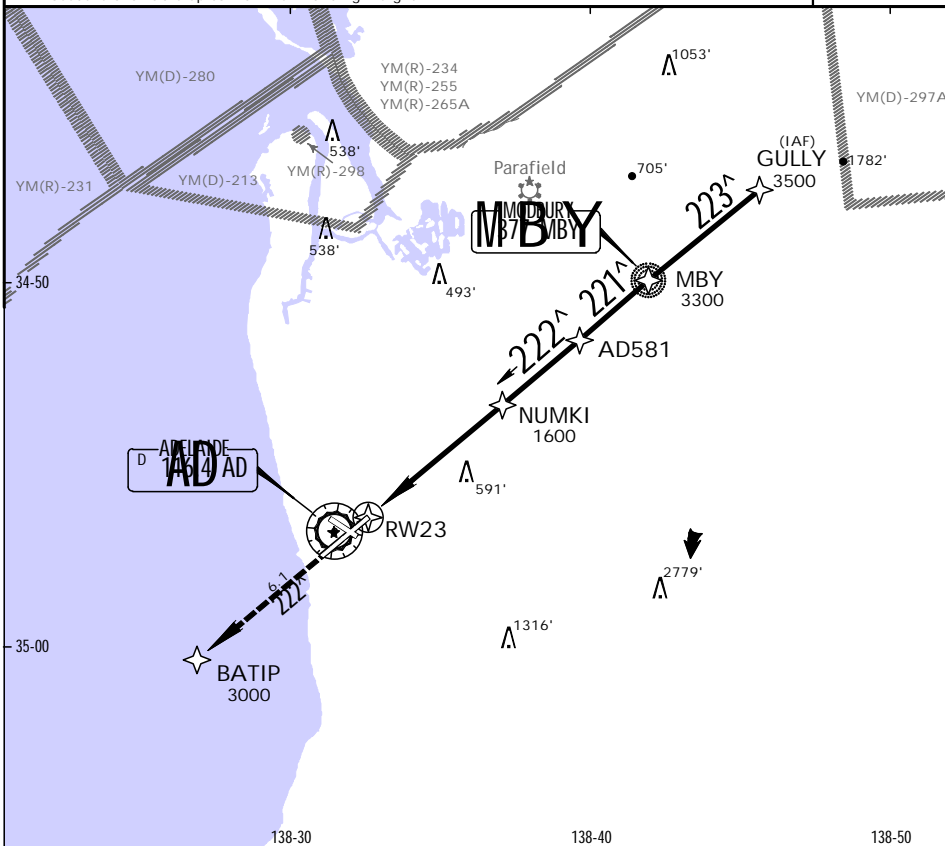

Dist to Threshold	1.5	1.7	NUMKI	AD581	MBY	GULLY
ALTITUDE (3.0° APCH PATH)	496'	569'	1600'	2500'	3300'	4530'

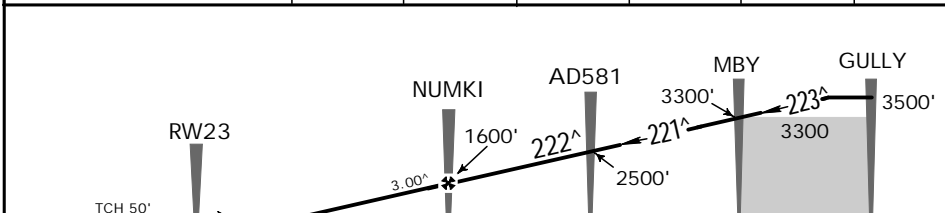

ENGINE OUT MISSED APCH: Track via the RNAV (RNP) Engine Out Missed Approach track to ELIZA and hold as published.
Acceleration altitude 1500' QNH (1500' AGL). Climb to 3800' or as directed by ATC.

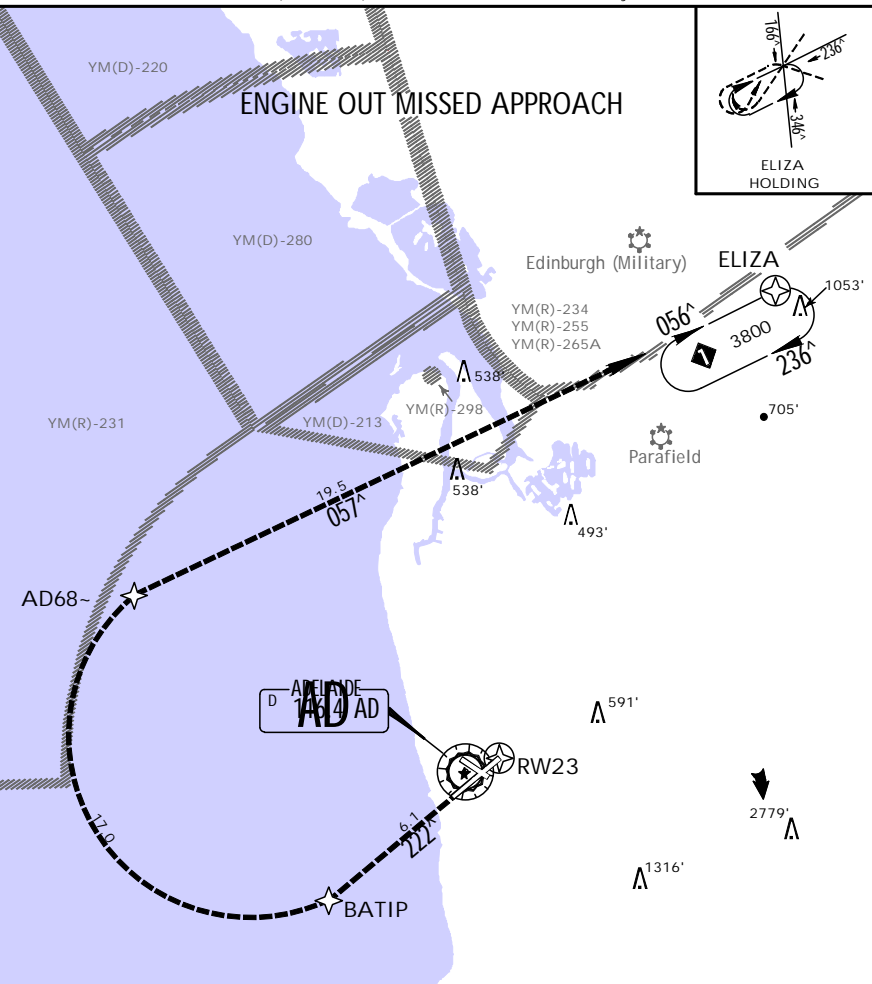

Gnd speed-Kts	70	90	100	120	140	160	HIALS		222°	BATIP
Descent angle [3.00°]	372	478	531	637	743	849	PAPI	PAPI		
MAP at DA										


STRAIGHT-IN LANDING RWY 23				Missed apch climb gradient (All Engines) min 5.6% to 3000'			
RNP 0.15				RNP 0.30			
1 CAT C: DA(H) 496' (476')				1 CAT C: DA(H) 563' (543')			
2 CAT C/D: DA(H) 500' (480')				2 CAT C/D: DA(H) 569' (549')			
HIRL out				HIRL out			
HIALS out				HIALS out			
1.7 km				2.1 km			

YPAD/ADL


ADELAIDE INTL

24 MAY 13
Eff. 29 May 1600Z (12-25)
JEPPESEN
MISSED APCH CLIMB GRADIENT MIN 7.7%
ADELAIDE, SA, AUSTRALIA
RNAV-U (RNP) Rwy 30
CAT C



ATIS	ADELAIDE Approach (R) Within 36 NM:				ADELAIDE Tower	Ground
116.4 134.5	SE of Rwy 05-23 118.2	NW of Rwy 05-23 124.2			120.5	121.7
RNAV RNV U 30	Final Apch Crs 296 [^]	Procedure Alt AD731 2800' (2786')	RNP DA(H) Refer to Minimums	Apt Elev 20'	Rwy 30 14'	
MISSED APCH: Track via the RNAV (RNP) missed approach track to ANUPI, then track 296 [^] . Climb to 3000' or as directed by ATC. Acceleration altitude 1500' QNH.						
Alt Set: hPa Rwy Elev: 1 hPa Trans level: FL 110 Trans alt: 10000' 1. FOR CASA APPROVED OPERATORS ONLY. 2. RF REQUIRED. 3. Local QNH REQUIRED. 4. Local temperature REQUIRED. 5. Procedure temperature range 0°C (32°F) to 43°C (109°F). 6. Lateral transition to missed approach must not be initiated prior to DA(H) position. 7. Procedure available up to maximum landing weight.						



MSA AD VOR
3800'
within 10 NM

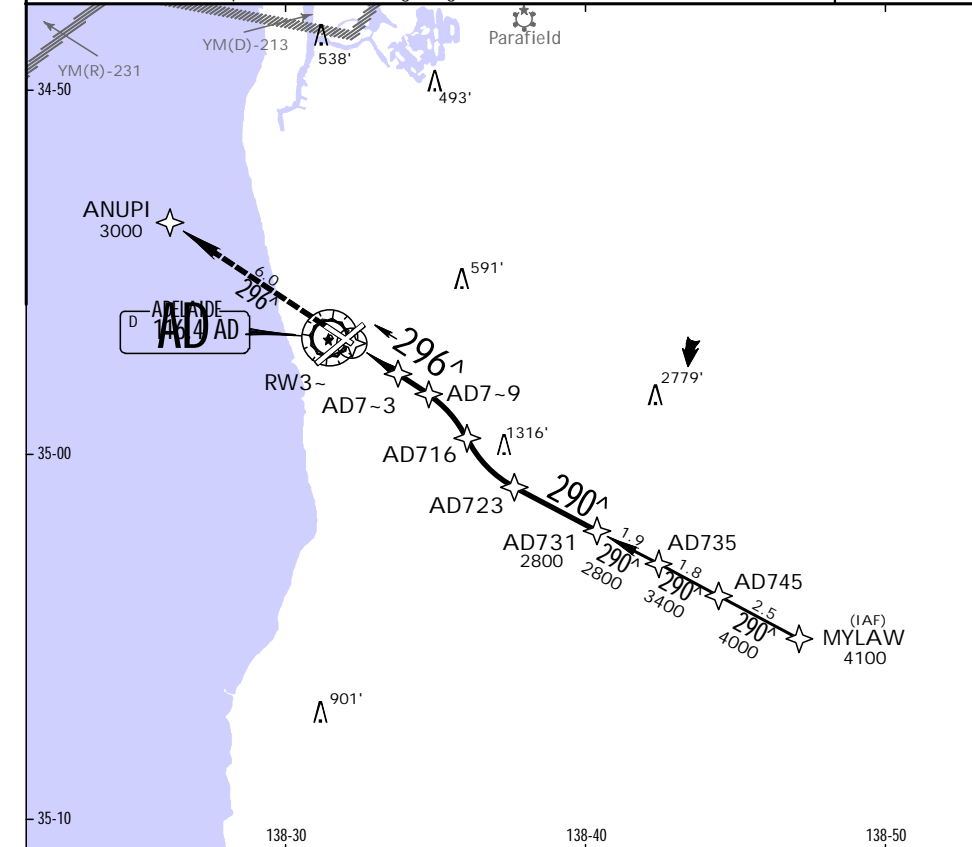

Dist to Threshold	1.7	1.9	AD7-3	AD7-9	AD716	AD723	AD731
ALTITUDE (3.0° APCH PATH)	544'	604'	550'	870'	1380'	1980'	2800'

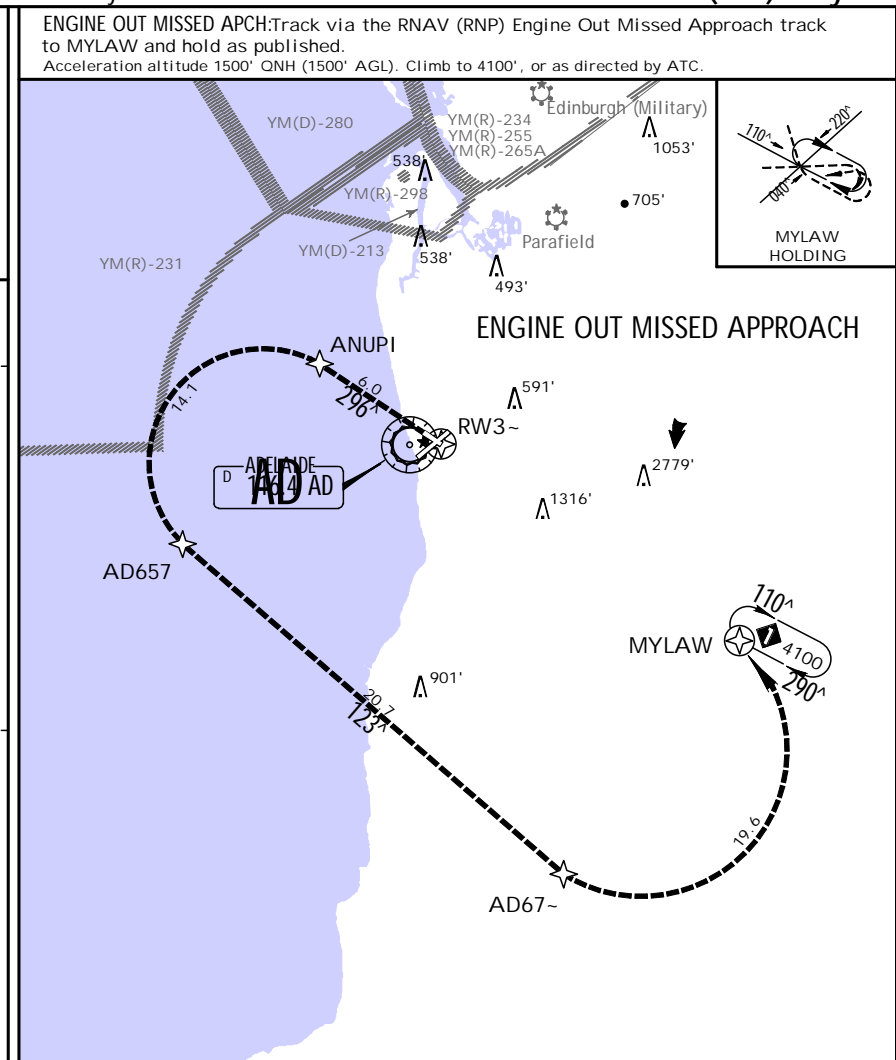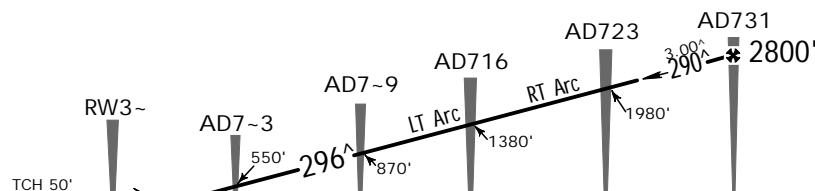

Gnd speed-Kts	70	90	100	120	140	160			
Descent angle [3.00°]	372	478	531	637	743	849			
MAP at DA									

STRAIGHT-IN LANDING RW30	
Missed apch climb gradient (All Engines) mim 7.7% to 3000'	
RNP 0.15	
RNP 0.30	
1 CAT C: DA(H) 544' (530')	
1 CAT C: DA(H) 604' (590')	
C	
2.8 km	
3.2 km	

D
ft)


YPAD/ADL
ADELAIDE INTL

9 MAY 14


13-1


ADELAIDE, SA, AUSTRALIA
VOR Rwy 05

ATIS		ADELAIDE Approach (R) Within 36 NM: SE of Rwy 05-23 NW of Rwy 05-23		ADELAIDE Tower		Ground	
116.4 134.5		118.2 124.2		120.5		121.7	
VOR AD 116.4	Final Apch Crs 035^	Procedure Alt D5.0 1450' (1436')	MDA(H) 490' (476')	Apt Elev 20' Rwy 05 14'			
MISSSED APCH: Track to AD VOR then turn RIGHT , track outbound on AD VOR R-042, climb to 3000' or as directed by ATC.							
Alt Set: hPa Rwy Elev: 1 hPa Trans level: FL 110 Trans alt: 10000' 1. DME REQUIRED. 2. Aircraft may be RADAR vectored to Final. 3. GPS permitted in lieu of DME. Reference waypoint AD VOR.							

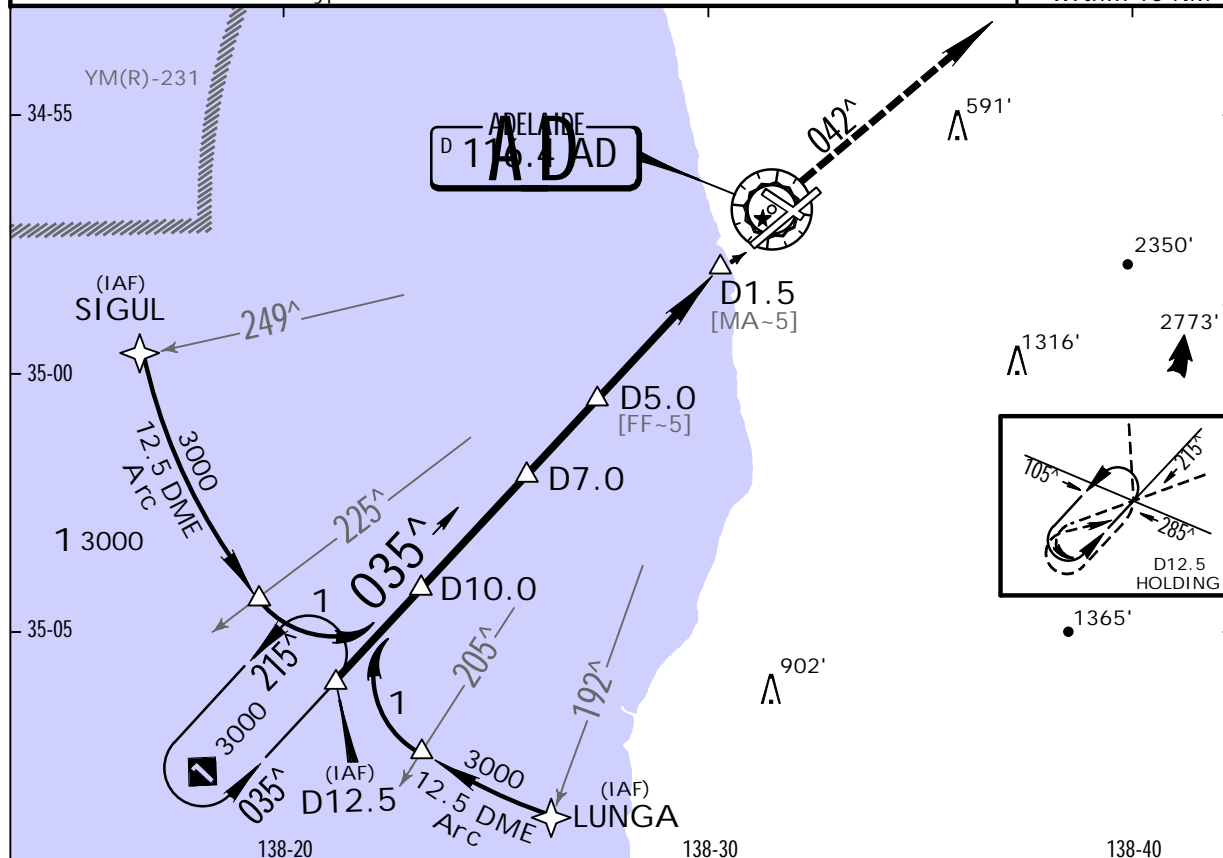

AD DME	9.9	9.0	8.0	7.0	6.0	5.0	4.0	3.0	2.0
ALT (3^ APCH PATH)	3000'	2720'	2400'	2080'	1770'	1450'	1130'	810'	490'

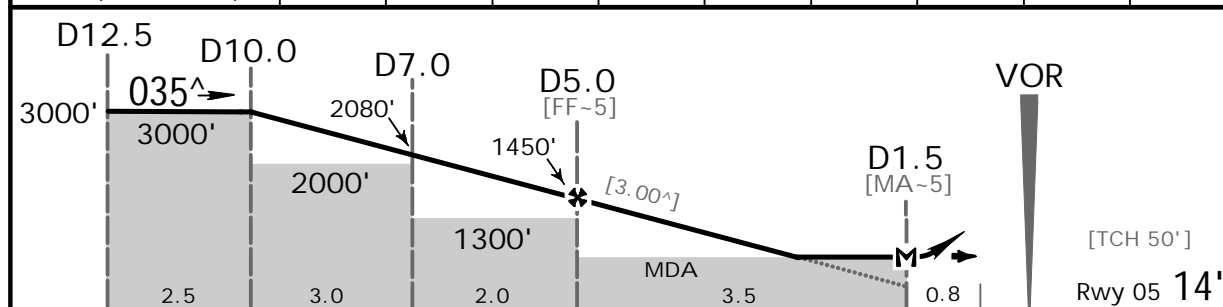


Gnd speed-Kts	70	90	100	120	140	160		PAPI	AD 116.4	 RT	AD 116.4 R-042
Descent Angle [3.00°]	372	478	531	637	743	849					
MAP at D1.5											

STRAIGHT-IN LANDING RWY05

MDA(H) 490' (476')

CIRCLE-TO-LAND

Max Kts	MDA(H)
100	900' (880') -2.4 km
135	
180	1000' (980') -4.0 km



No Circling beyond
4 DME AD South of
Rwy 05-23 or beyond

JS OPS

YPAD/ADL

ADELAIDE INTL

9 MAY 14

(13-2)


JEPPESSEN

ADELAIDE, SA, AUSTRALIA


VOR Rwy 12

BRIEFING STRIP™


ATIS 116.4 134.5	ADELAIDE Approach (R) Within 36 NM: SE of Rwy 05-23 NW of Rwy 05-23 118.2 124.2		ADELAIDE Tower 120.5	Ground 121.7
VOR AD 116.4	Final Apch Crs 124 [^]	Procedure Alt D5.0 1600' (1586')	MDA(H) (CONDITIONAL) 470' (456')	Apt Elev 20' Rwy 12 14'
MISSED APCH: Turn RIGHT to track 140 [^] , climb to 3000' or as directed by ATC.				
Alt Set: hPa Rwy Elev: 1 hPa Trans level: FL 110 Trans alt: 10000'				
1. DME REQUIRED. 2. Aircraft may be RADAR vectored to Final. 3. GPS permitted in lieu of DME. Reference waypoint AD VOR.				



MSA AD VOR
3800'
within 10 NM

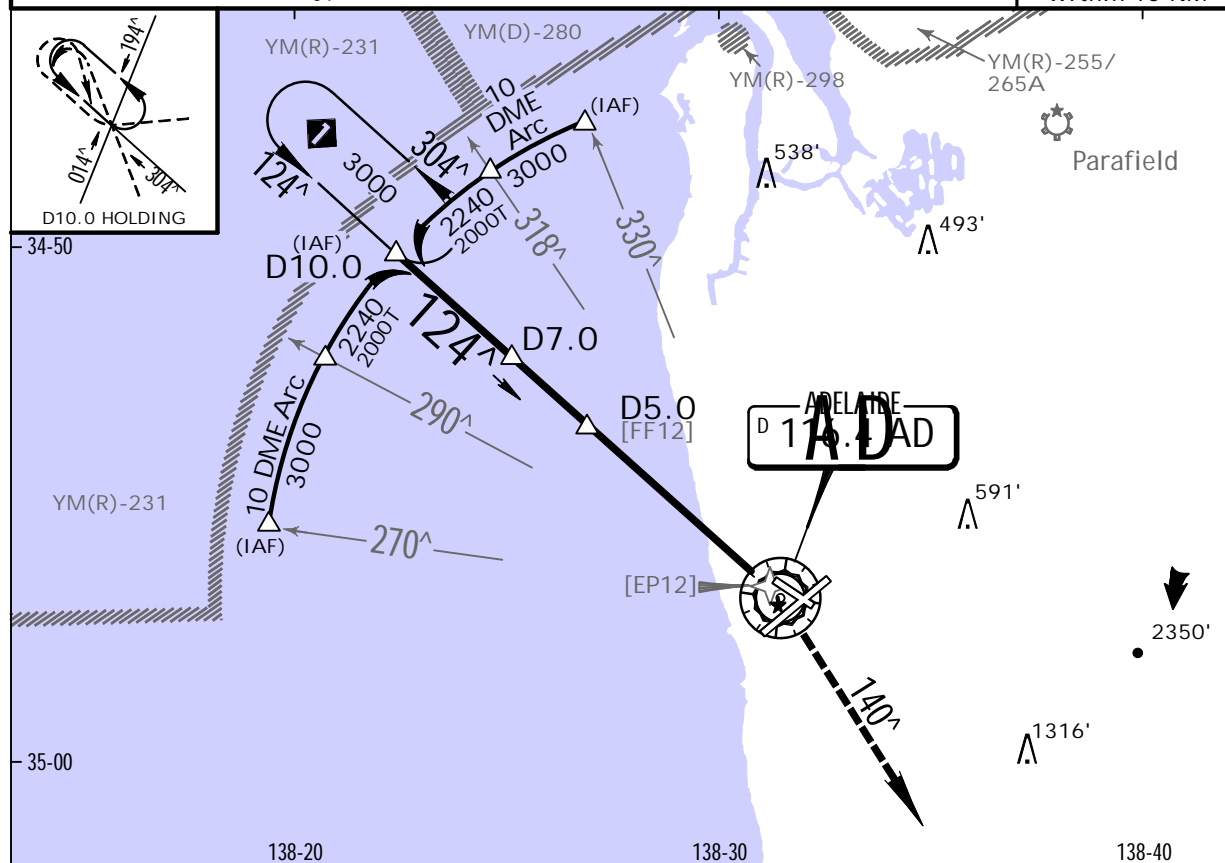

AD DME	9.4	9.0	8.0	7.0	6.0	5.0	4.0	3.0	2.4	2.0	1.4
ALT (3 [^] APCH PATH)	3000'	2880'	2560'	2240'	1920'	1600'	1290'	970'	780'	660'	470'

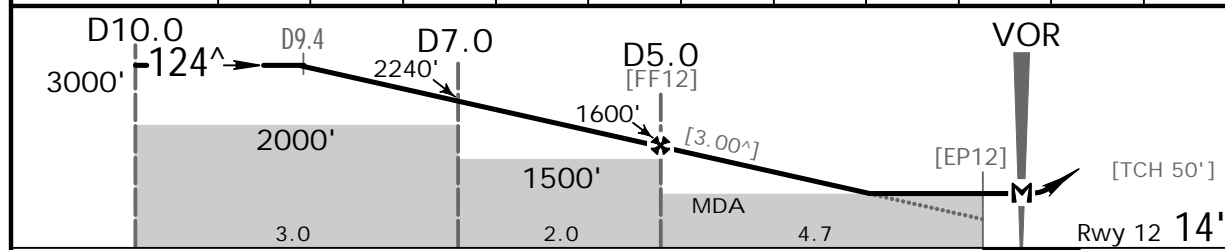

Gnd Speed-Kts	70	90	100	120	140	160					
Descent Angle [3.00 [^]]	372	478	531	637	743	849					
MAP at VOR											

STRAIGHT-IN LANDING RWY12		CIRCLE-TO-LAND		<p>No Circling beyond 4 DME AD South of Rwy 05-23 or beyond 3.0 DME AD South of Rwy 12</p>
Missed apch climb gradient mim 3.6%	Missed apch climb gradient mim 2.5%			
MDA(H) 470' (456')	MDA(H) 780' (766')			
		Max Kts	MDA(H)	
A B C	2.4 km	100	900'(880')-2.4 km	
		135		
		180	1000'(980')-4.0 km	

NS OPS

YPAD/ADL
ADELAIDE INTL

9 MAY 14


(13-3)

JEPPESSEN


ADELAIDE, SA, AUSTRALIA
VOR Rwy 23

BRIEFING STRIP


ATIS	ADELAIDE Approach (R) Within 36 NM: SE of Rwy 05-23 NW of Rwy 05-23		ADELAIDE Tower	Ground
116.4	134.5	118.2	120.5	121.7
VOR AD 116.4	Final Apch Crs 227 [^]	Procedure Alt D7.0 2030' (2010')	MDA(H) 770' (750')	Apt Elev 20' Rwy 23 20'
MISSED APCH: Track 227 [^] , climb to 3000' or as directed by ATC.				
Alt Set: hPa Rwy Elev: 1 hPa Trans level: FL 110 Trans alt: 10000'				
1. DME required. 2. Aircraft may be RADAR vectored to D10.0 final. 3. GPS permitted in lieu of DME. Reference waypoint AD VOR. 4. Approach path angle does not coincide with PAPI on glide slope indication.				
				MSA AD VOR 3800' within 10 NM

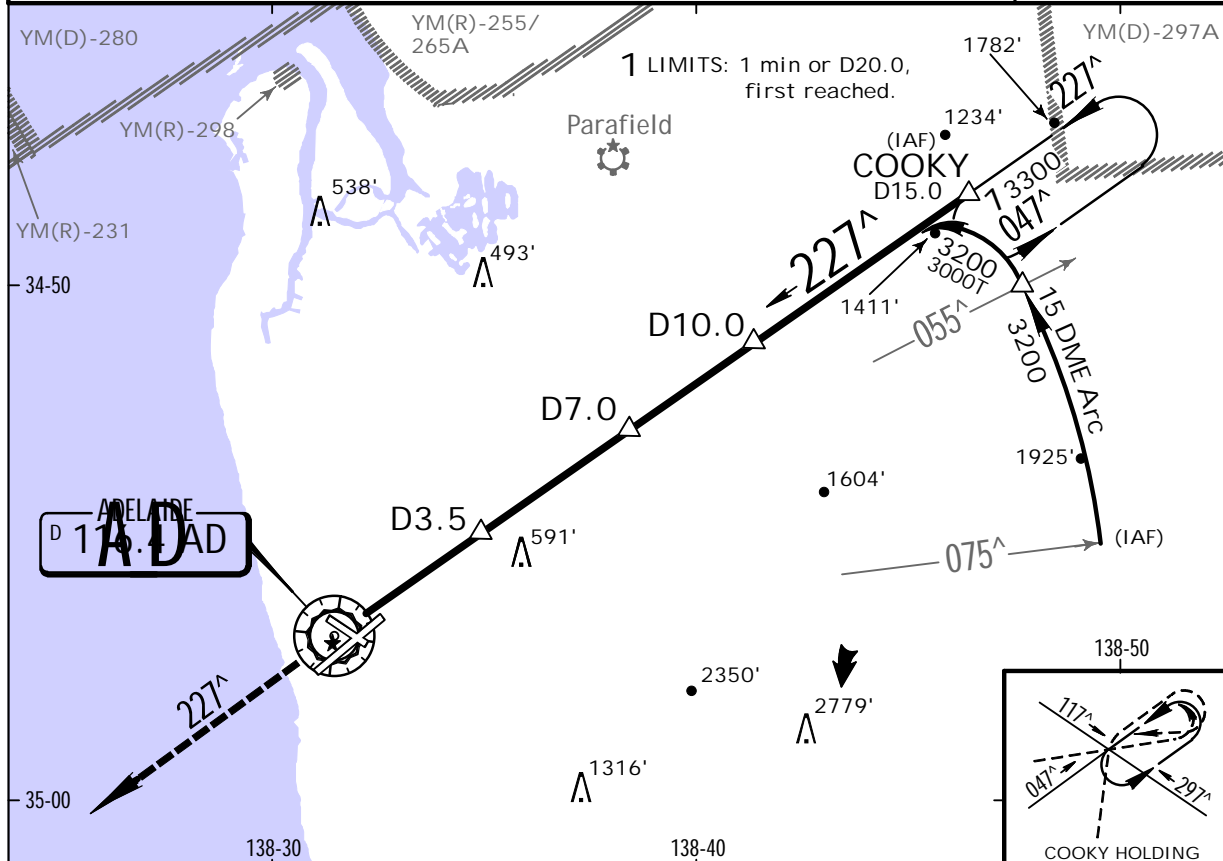

AD DME	3.1	3.5	4.0	5.0	6.0	7.0	8.0	9.0	10.0	10.6
ALTITUDE	770'	900'	1040'	1380'	1700'	2030'	2350'	2680'	3000'	3200'

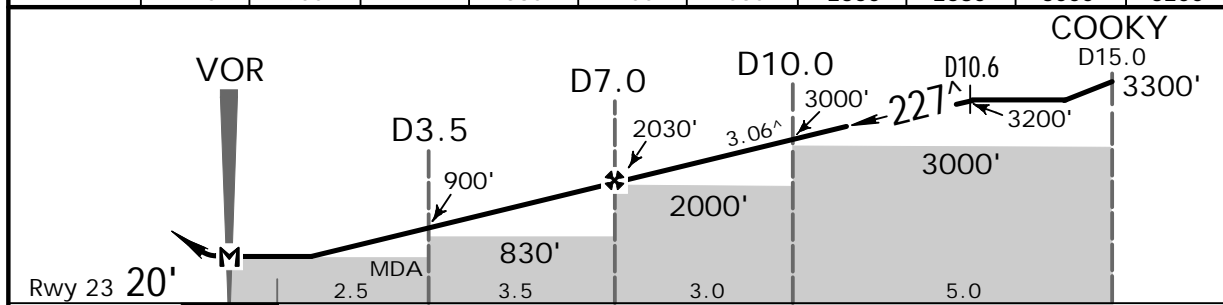

Gnd speed-Kts	70	90	100	120	140	160	HIALS		227 [^]	3000'
Descent Angle	3.06 [^]	379	487	541	650	758	PAPI			
MAP at VOR										

STRAIGHT-IN LANDING RWY23		CIRCLE-TO-LAND		 <p>No Circling beyond 4 DME AD South of Rwy 05-23 or beyond</p>
MDA(H) 770' (750')				
HIALS out		Max Kts	MDA(H)	
A		100	900' (880') -2.4 km	
B		135		
C	4.2 km	180	1000' (980') -4.0 km	

VS OPS

No Circling beyond
4 DME AD South of
Rwy 05-23 or beyond

YPAD/ADL

ADELAIDE INTL


9 MAY 14


(13-4)

JEPPESSEN


ADELAIDE, SA, AUSTRALIA
VOR Rwy 30

BRIEFING STRIP


ATIS		ADELAIDE Approach (R) Within 36 NM: SE of Rwy 05-23 NW of Rwy 05-23		ADELAIDE Tower	Ground
116.4	134.5	118.2	124.2	120.5	121.7
VOR AD 116.4	Final Apch Crs 290^	Procedure Alt D8.0 2730' (2716')	MDA(H) 600' (586')	Apt Elev 20' Rwy 30 14'	 MSA AD VOR 3800' within 10 NM
MISSED APCH: Track 290^, climb to 3000' or as directed by ATC.					
Alt Set: hPa Rwy Elev: 1 hPa Trans level: FL 110 Trans alt: 10000'					
1. DME required. 2. GPS permitted in lieu of DME. Reference waypoint AD VOR. 3. Approach path angle does not coincide with PAPIs on glide slope indication.					

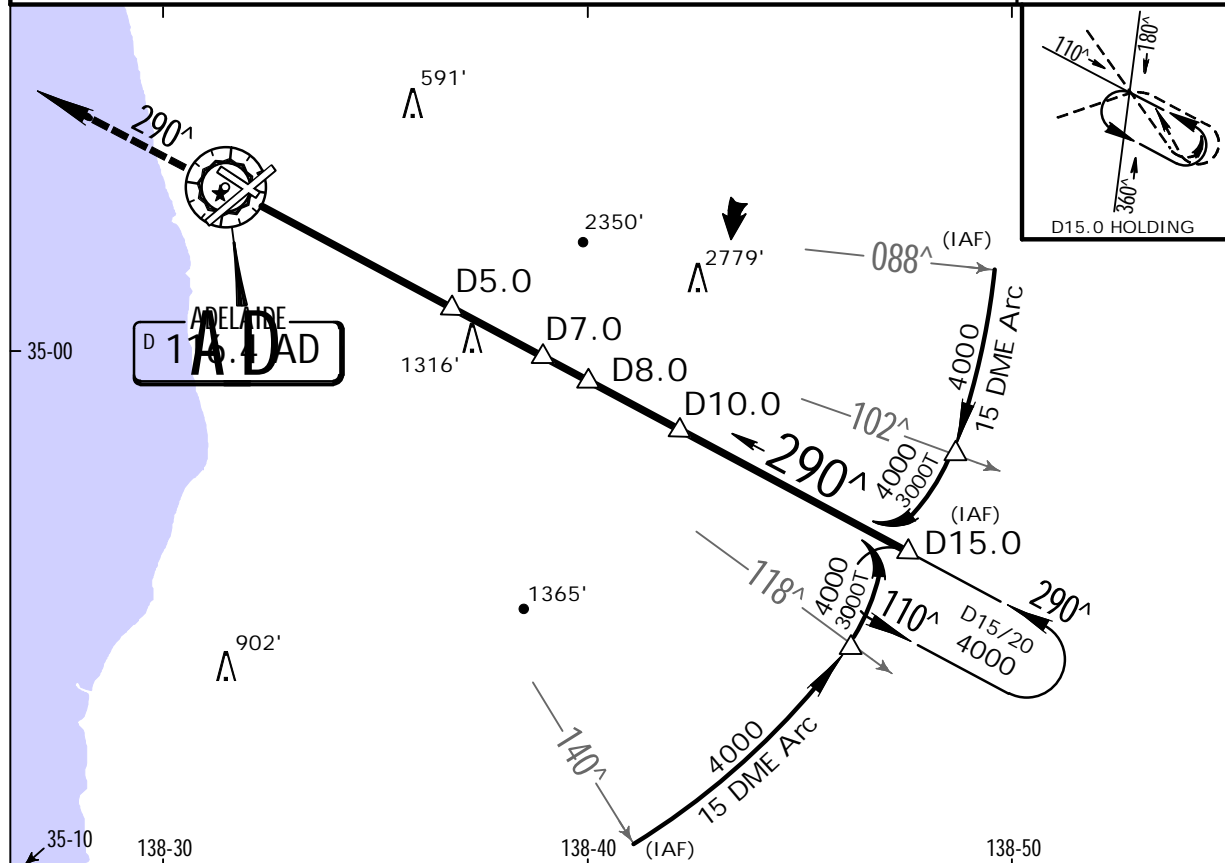

AD DME	2.1	3.0	4.0	5.0	6.0	7.0	8.0	9.0	10.0	11.0	11.6
ALTITUDE	600'	930'	1290'	1650'	2010'	2370'	2730'	3090'	3460'	3820'	4000'

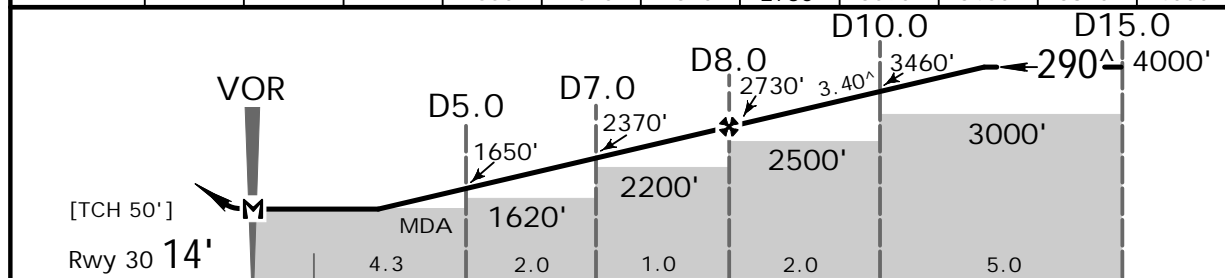

Gnd speed-Kts	70	90	100	120	140	160	PAPI		290 [^] 3000'	
Descent Angle 3.40 [^]	421	541	602	722	842	963				
MAP at VOR										

STRAIGHT-IN LANDING RWY30		CIRCLE-TO-LAND		 No Circling beyond 4 DME AD South of Rwy 05-23 or beyond
MDA(H) 600' (586')		MDA(H)		
A	3.2 km	Max Kts		
B		100	900' (880') -2.4 km	
C		135		
D		180	1000' (980') -4.0 km	

VS OPS

YSSY/SYD

 JEPPESEN

SYDNEY, NSW, AUSTRALIA

-(KINGSFORD SMITH) INTL

(10-1P) 1 AUG 14

.AIRPORT.BRIEFING.

AIR TRAFFIC FLOW MANAGEMENT PROCEDURES

Slot Management Scheme

Sydney Slot Management Scheme is applicable to all airline and aircraft operators using Sydney airport. All flights operating into and out of Sydney must obtain an Airport Coordination Australia (ACA) slot in accordance with AIR TRAFFIC FLOW MANAGEMENT in Airway Manual - Air Traffic Control - Australia - Flight Planning.

Ground Delay Program (GDP) Inbound

Sydney GDP is applicable to all fixed wing, non priority flights departing from all Australian domestic airports, and arriving at Sydney between the hours of 2000 and 1300 UTC, as adjusted by daylight saving time variations.

Flights to Sydney during the operation of GDP must obtain an ACA slot and Calculated Off Blocks Time (COBT) in accordance with AIR TRAFFIC FLOW MANAGEMENT in Airway Manual - Air Traffic Control - Australia - Flight Planning. The COBT can be obtained through their company or the National Operations Center on 1800 020 626.

In addition, flights departing from Bankstown or Camden for a landing in Sydney must contact ATC on 02 9556 6515 prior to starting engines.

Ground Delay Program (GDP) Outbound

After receiving Airways Clearance, aircraft participating in a Ground Delay Program (GDP) are required to report when ready for pushback/taxi on Sydney Coordinator on 126.7 MHz.

Sydney Coordinator will check compliance with COBT and apply relevant AIR TRAFFIC FLOW MANAGEMENT procedures in Airway Manual - Air Traffic Control - Australia - Flight Planning.

Do not contact Ground, monitor only.

SMC will initiate contact with the aircraft when able to process.

NOTE: Aircraft not participating in a GDP are not required to contact Sydney Coordinator prior to requesting pushback, and should contact the relevant Ground Frequency on 121.7 MHz or 126.5 MHz as applicable.

JEPPESSEN

23 MAY 14 (10-2)

Eff. 29 May

DME or GNSS ARRIVAL


SYDNEY, NSW, AUSTRALIA

-(KINGSFORD SMITH) INTL

SECTOR A

ATIS 112.1 118.55 126.25 428
SYDNEY Approach (R) North 124.4 South 128.3
DIRECTOR West 126.1 East 125.3
SYDNEY Tower: Rwy 16R/34L & 07/25 120.5
Rwy 16L/34R 124.7
Ground: East of Rwy 16R/34L 121.7
West of Rwy 16R/34L 126.5

Alt Set: hPa Trans level: FL 110
Apt Elev: 1 hPa Trans alt: 10000' (9979')




MSA
SY VOR
Within 25 NM
2100' Within 10 NM

VOR 112.1 SY
Apt. Elev 21'


ATC APPROACH SPEEDS

NM from threshold	SPEED
10	185-160 KT
5	160-150 KT

NOT TO SCALE

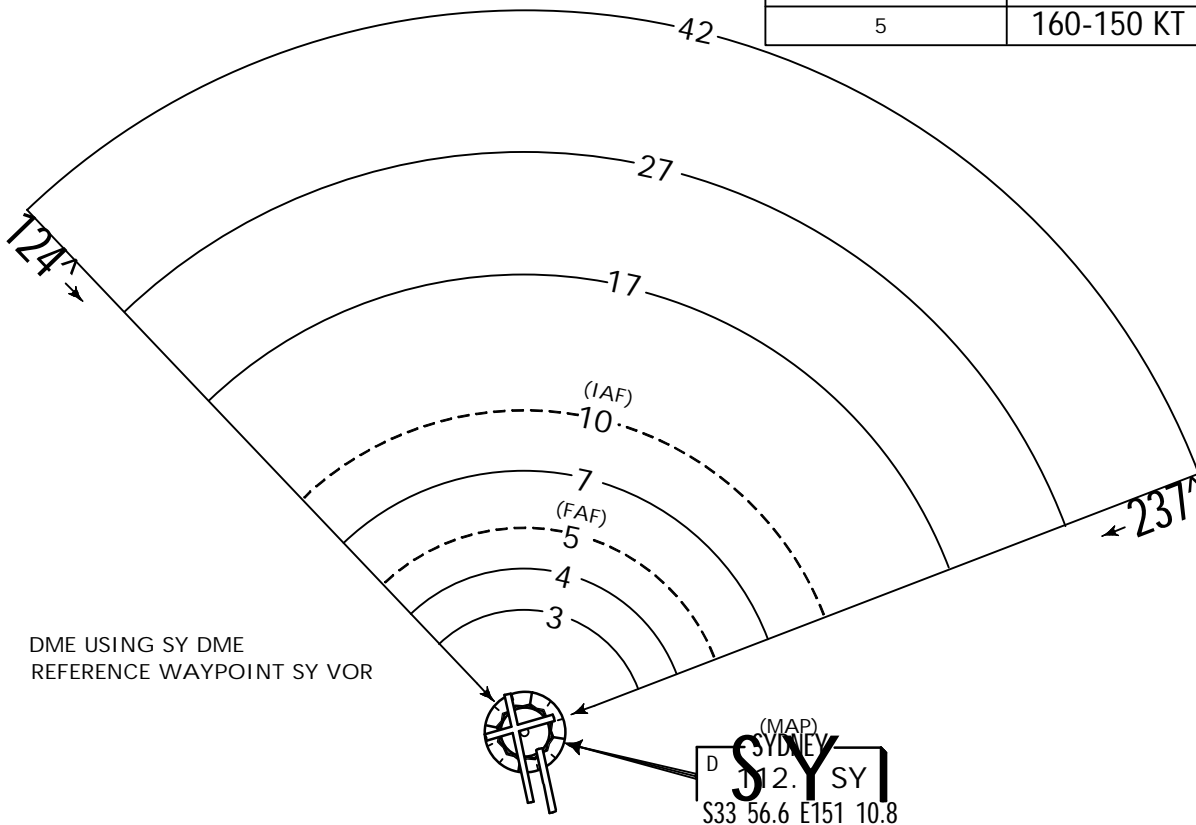

NM to VOR	2.0	3.0	4.0	5.0	6.0	7.0	8.0	9.0	10.0	11.0	12.0	13.0	13.3
ALTITUDE	1400'	1730'	2050'	2370'	2690'	3000'	3320'	3640'	3960'	4280'	4600'	4910'	5000'

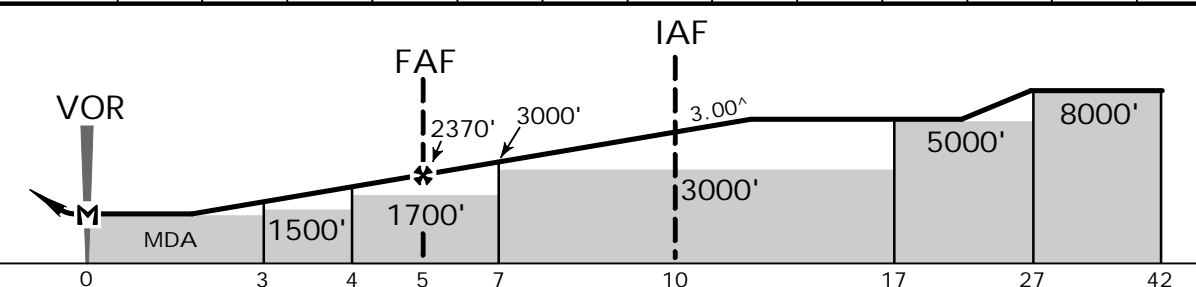


MISSED APPROACH: Climb on track to 3000'.

CIRCLE-TO-LAND

MDA(H) 1400' (1379')

A	2.4 km
B	
C	4.0 km
D	5.0 km

No Circling Approach to Rwy 16L/34R, 07/25 at night.
No Circling East of Rwy 16R & North of Rwy 25 beyond D3 SY.



NS OPS

Gnd speed-Kts	70	90	100	120	140	160
Descent angle 3.00°	372	478	531	637	743	849

JEPPESEN

23 MAY 14 (10-2A)

.Eff. 29 May .DME or GNSS ARRIVAL.


SYDNEY, NSW, AUSTRALIA

-(KINGSFORD SMITH) INTL

SECTOR B

ATIS 112.1 118.55 126.25 428
SYDNEY Approach (R) North 124.4 South 128.3
DIRECTOR West 126.1 East 125.3
SYDNEY Tower: Rwy 16R/34L & 07/25 120.5
Rwy 16L/34R 124.7
Ground: East of Rwy 16R/34L 121.7
West of Rwy 16R/34L 126.5

Alt Set: hPa Trans level: FL 110
Apt Elev: 1 hPa Trans alt: 10000' (9979')




MSA
SY VOR
Within 25 NM
2100' Within 10 NM

VOR 112.1 SY
Apt. Elev 21'


ATC APPROACH SPEEDS

NM from threshold	SPEED
10	185-160 KT
5	160-150 KT

NOT TO SCALE

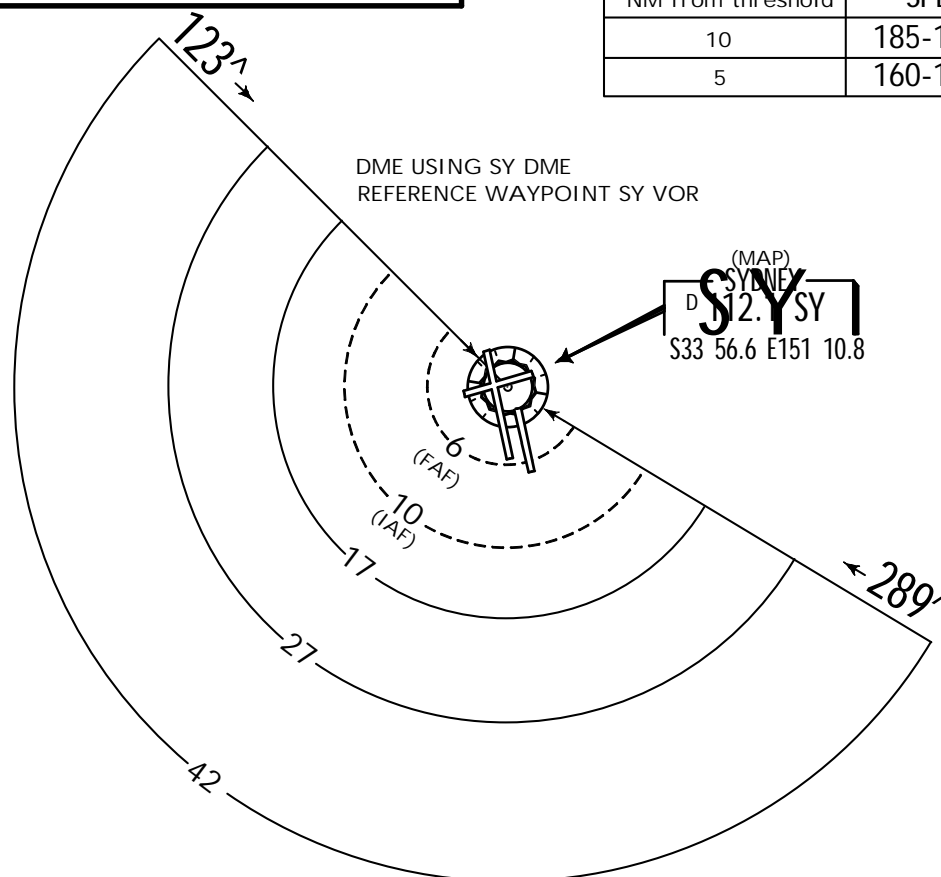

NM to VOR	12.0	11.0	10.0	9.0	8.0	7.0	6.0	5.0	4.0	3.0	2.0	1.0	0.0
ALTITUDE	5000'	4670'	4340'	4000'	3670'	3340'	3000'	2670'	2340'	2000'	1670'	1340'	1000'

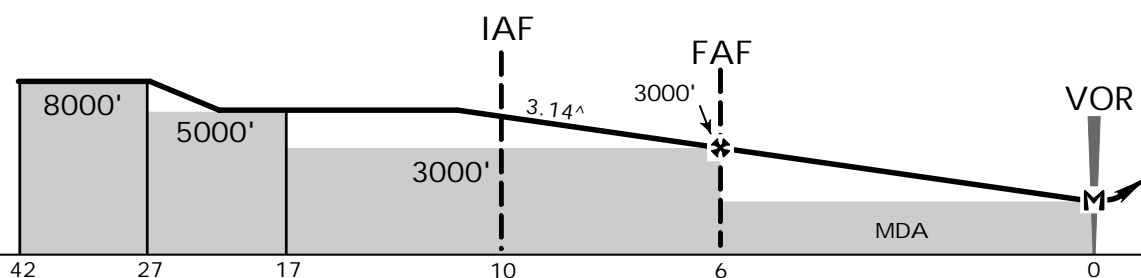


MISSED APPROACH: Climb on track to 3000'.

CIRCLE-TO-LAND

MDA(H) 1000' (979')

A	2.4 km
B	4.0 km
C	5.0 km
D	

No Circling Approach to Rwy 16L/34R, 07/25 at night.
No Circling East of Rwy 16R & North of Rwy 25 beyond D3 SY.



NS OPS

Gnd speed-Kts	70	90	100	120	140	160
Descent angle 3.14°	389	500	556	667	778	889

JEPPESEN

23 MAY 14 (10-2B)

.Eff. 29 May. .DME.or.GNSS.ARRIVAL.

SYDNEY, NSW, AUSTRALIA

-(KINGSFORD SMITH) INTL


SECTOR C

VOR 112.1 SY

Apt. Elev 21'

ATIS 112.1 118.55 126.25 428
SYDNEY Approach (R) North 124.4 South 128.3
DIRECTOR East 125.3 West 126.1
SYDNEY Tower: Rwy 16R/34L & 07/25 120.5
Rwy 16L/34R 124.7
Ground: East of Rwy 16R/34L 121.7
West of Rwy 16R/34L 126.5

Alt Set: hPa Trans level: FL 110
Apt Elev: 1 hPa Trans alt: 10000' (9979')




MSA
SY VOR
2100' Within 10 NM

DME USING SY DME
REFERENCE WAYPOINT SY VOR


NOT TO SCALE

(MAP)
SYDNEY
D3 SY
S33 56.6 E151 10.8

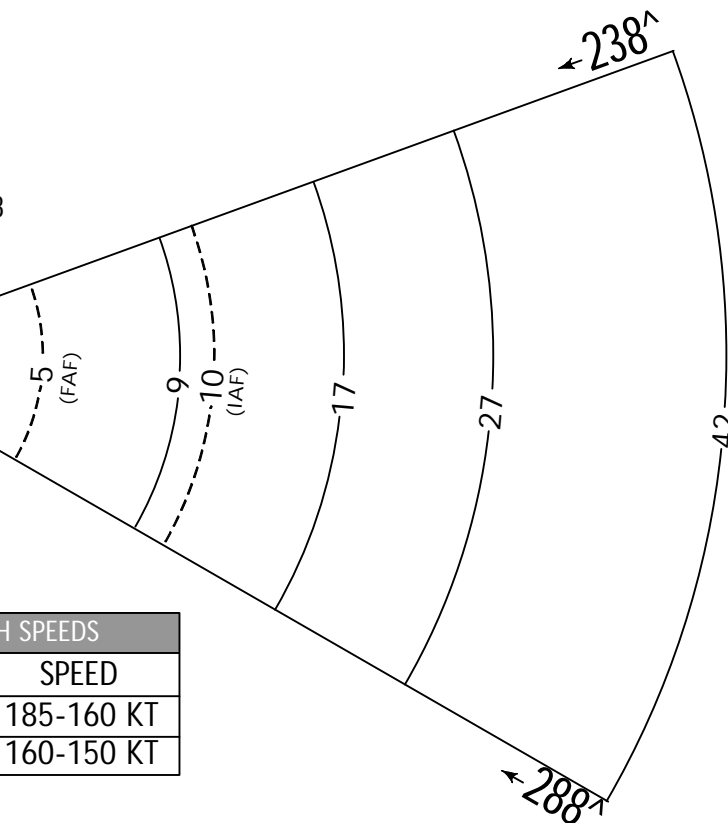

ATC APPROACH SPEEDS	
NM from threshold	SPEED
10	185-160 KT
5	160-150 KT

NM to VOR	2.7	3.0	4.0	5.0	6.0	7.0	8.0	9.0	10.0	11.0	12.0	13.0	14.0	15.0	15.3
ALTITUDE	1000'	1100'	1410'	1730'	2050'	2370'	2690'	3000'	3320'	3640'	3960'	4280'	4590'	4910'	5000'

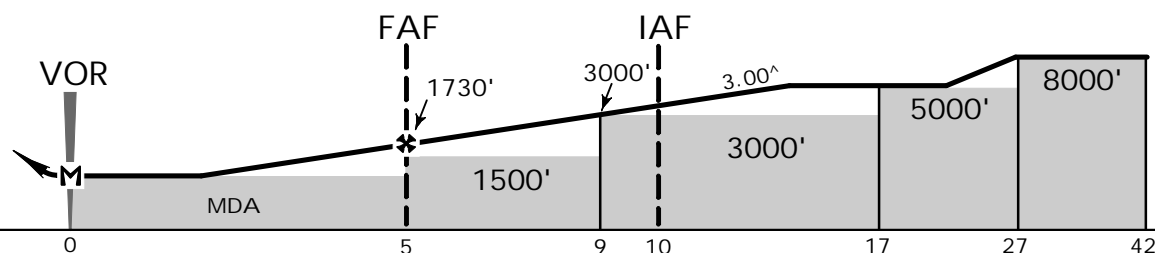


MISSED APPROACH: Climb on track to 3000'.

CIRCLE-TO-LAND

MDA(H) 1000' (979')

A	2.4 km
B	
C	4.0 km
D	5.0 km

No Circling Approach to Rwy 16L/34R, 07/25 at night.
No Circling beyond D3 SY East of Rwy 16R & North of Rwy 25.



NS OPS

Gnd speed-Kts	70	90	100	120	140	160
Descent angle 3.00°	370	478	531	637	743	840

23 MAY 14
JEPPesen Eff. 29. May. (10-2C)

.RNAV.STAR.
SYDNEY, NSW, AUSTRALIA

ATIS 112.1 118.55 126.25 428
SYDNEY Approach (R) North 124.4

YSSY -(KINGSFORD SMITH) INTL

TRANS LEVEL: FL 110
TRANS ALT: 10000'

BOREE FIVE ARRIVAL [BOREE5]

SPEED: MAX IAS 250 KT BELOW 10000'

ARRIVAL

From BOREE track 159° to BEROW.
Cross BEROW at or below 9000'. Track
158° to OVILS.

For RWYS 07, 16L/R, 25:
Track 158° to SY VOR. EXPECT
RADAR vectors to final.

For RWY 34L: Track 158° to JENTL.
Turn RIGHT, track 181° to ZONKA.
Cross ZONKA at or above 6000'.
Track 181° to DUDOK. Turn LEFT,
track 155° to NASHO. Track 155°, EXPECT
RADAR vectors to final.


For RWY 34R: Turn LEFT, track
121° to MAJAR. Turn RIGHT, track
155° to DIPPA. Cross DIPPA at or
above 6000'. Track 155° to
JAKLN. Track 155°, EXPECT RADAR
vectors to final.

NOTE: For ILS Rwy 34R PRM, EXPECT
to track downwind until reaching 2000'.

LOST COMMS ▼ LOST COMMS ▼ LOST COMMS ▼ LOST COMMS ▼ LOST
COMMUNICATIONS FAILURE:
PROCEDURE IN IMC
Squawk 7600.
Comply with vertical navigation
requirements, but not below MSA.
Track via the latest STAR clearance
to the nominated runway, then fly the
most suitable approach in accordance
with EMERGENCY PROCEDURES.
LOST COMMS ▲ LOST COMMS ▲ LOST COMMS ▲ LOST COMMS ▲ LOST

ATC APPROACH SPEEDS	
NM from threshold	SPEED
10	185-160 KT
5	160-150 KT

GNSS permitted in lieu of DME
Reference waypoint SY VOR

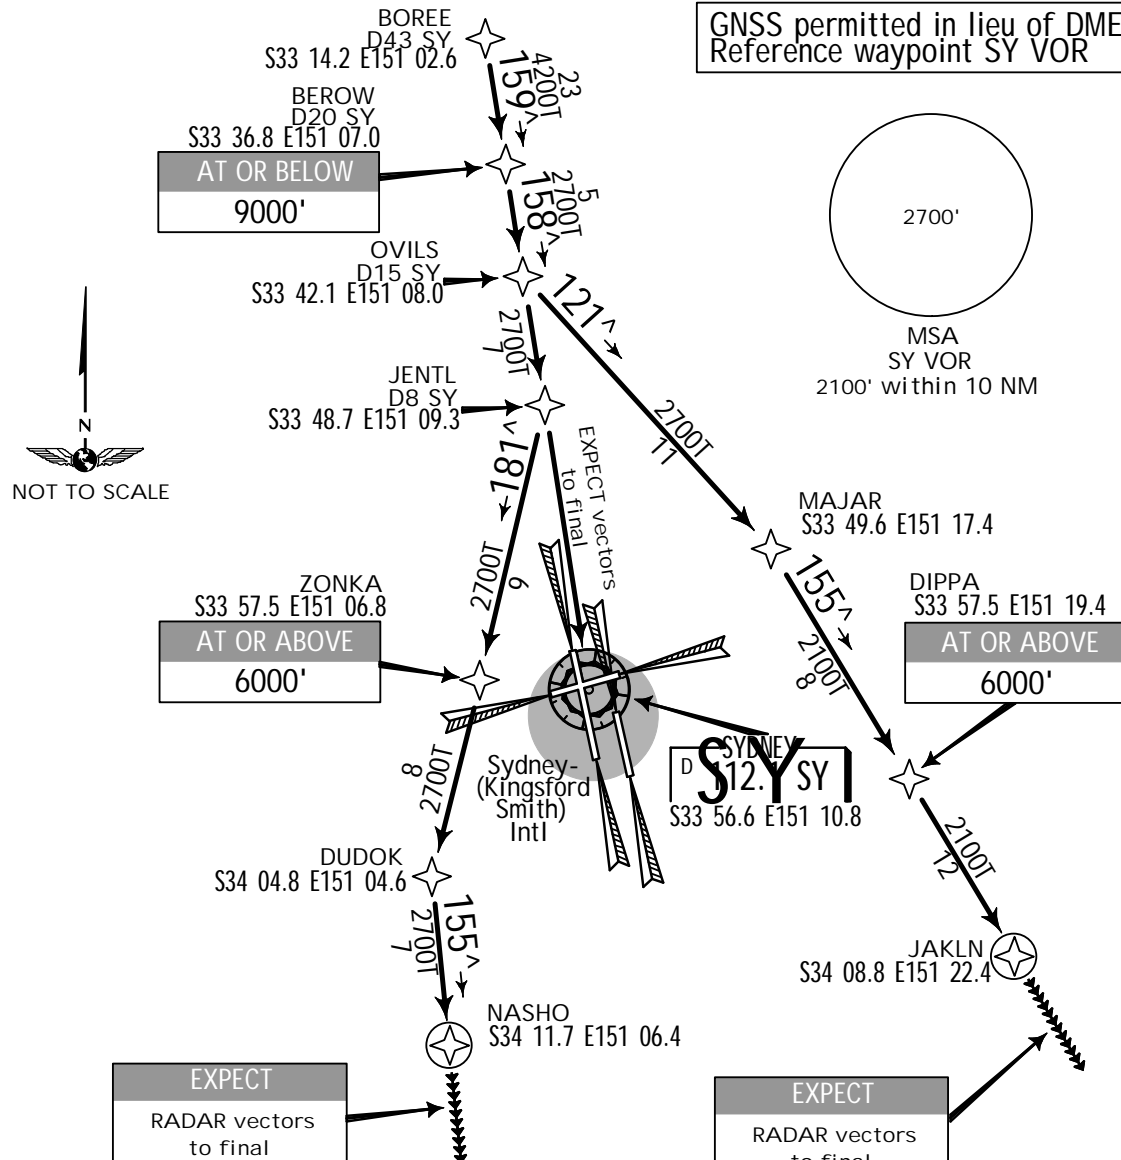

JEPPESEN

23 MAY 14

(10-2D)

.Eff.29.May.

.STAR.

ATIS 112.1 118.55 126.25 428

SYDNEY Approach (R) 124.4

SYDNEY, NSW, AUSTRALIA

YSSY -(KINGSFORD SMITH) INTL

TRANS LEVEL: FL 110
TRANS ALT: 10000'

CALGA NINE ARRIVAL [CALGA9]

SPEED: MAX IAS 250 KT BELOW 10000'

TRANSITIONS


MOUNT SANDON (MSO):

From MSO NDB TO CAA NDB:

Track 175° to SGT NDB. Turn LEFT
track 170° to YAKKA. Track 170° to CAA
NDB. Then follow arrival instructions.

ARRIVAL

From CAA NDB track SY R-350 to LANOL.
Cross LANOL at or below 7000'. Track SY
R-350° to SY VOR. EXPECT RADAR vectors
to final approach course when inside
SY 30 DME.



MSA
SY VOR
2100' within 10 NM

GNSS permitted in lieu of DME
Reference waypoint SY VOR

ATC APPROACH SPEEDS	
NM from threshold	SPEED
10	185-160 KT
5	160-150 KT

EXPECT
RADAR vectors to
final approach course

Sydney-
(Kingsford Smith)
Intl

MOUNT SANDON
(MSO)
S31 23.2 E151 24.7

SGT
S32 33.1 E151 15.5

YAKKA
S33 11.5 E151 13.4

CAA
S33 24.2 E151 12.7

LANOL
S33 36.6 E151 12.0

AT OR BELOW
7000'

SY
S33 56.6 E151 10.8



LOST COMMS

COMMUNICATIONS FAILURE: PROCEDURE IN IMC

Squawk 7600.

Comply with vertical navigation requirements, but not below MSA.

Track via the latest STAR clearance to the nominated runway, then fly

the most suitable approach in accordance with EMERGENCY PROCEDURES

JEPPESEN

23 MAY 14

(10-2E)

.Eff.29.May.

.RNAV.STAR.

ATIS 112.1 118.55 126.25 428

SYDNEY Approach (R) North 124.4

SYDNEY, NSW, AUSTRALIA

YSSY -(KINGSFORD SMITH) INTL

TRANS LEVEL: FL 110
TRANS ALT: 10000'

MARLN NINE ARRIVAL [MARLN9]

SPEED: MAX IAS 250 KT BELOW 10000'

ARRIVAL

From MARLN track 264° to WHALE.
Cross WHALE at or below 9000'.

RWY 25: Track 264° to SY VOR.
EXPECT RADAR vectors to final.

RWYS 07, 16L/R, 34L:
Track 264° to PRAWN. Cross PRAWN
at or above 6000'. Track 265° to
SY VOR. EXPECT RADAR vectors to
final.


RWY 34R: Track 264° to PRAWN.
Cross PRAWN at or above 6000'.
Turn LEFT, track 187° to MANFA.
Turn LEFT, track 155° to JAKLN.
Track 155°, EXPECT RADAR vectors
to final.

NOTE: Tracking via SHARK subject
to ATC clearance.

NOTE: For ILS Rwy 34R PRM, EXPECT
to track downwind until reaching 2000'.

GNSS permitted in lieu of DME
Reference waypoint SY VOR

LOST COMMS ▼ LOST COMMS ▼ LOST COMMS ▼ LOST COMMS ▼ LOST
COMMUNICATIONS FAILURE:
PROCEDURE IN IMC
Squawk 7600.
Comply with vertical navigation
requirements, but not below MSA.
Track via the latest STAR clearance to
the nominated runway, then fly the most
suitable approach in accordance with
EMERGENCY PROCEDURES.
LOST COMMS ▲ LOST COMMS ▲ LOST COMMS ▲ LOST COMMS ▲ LOST

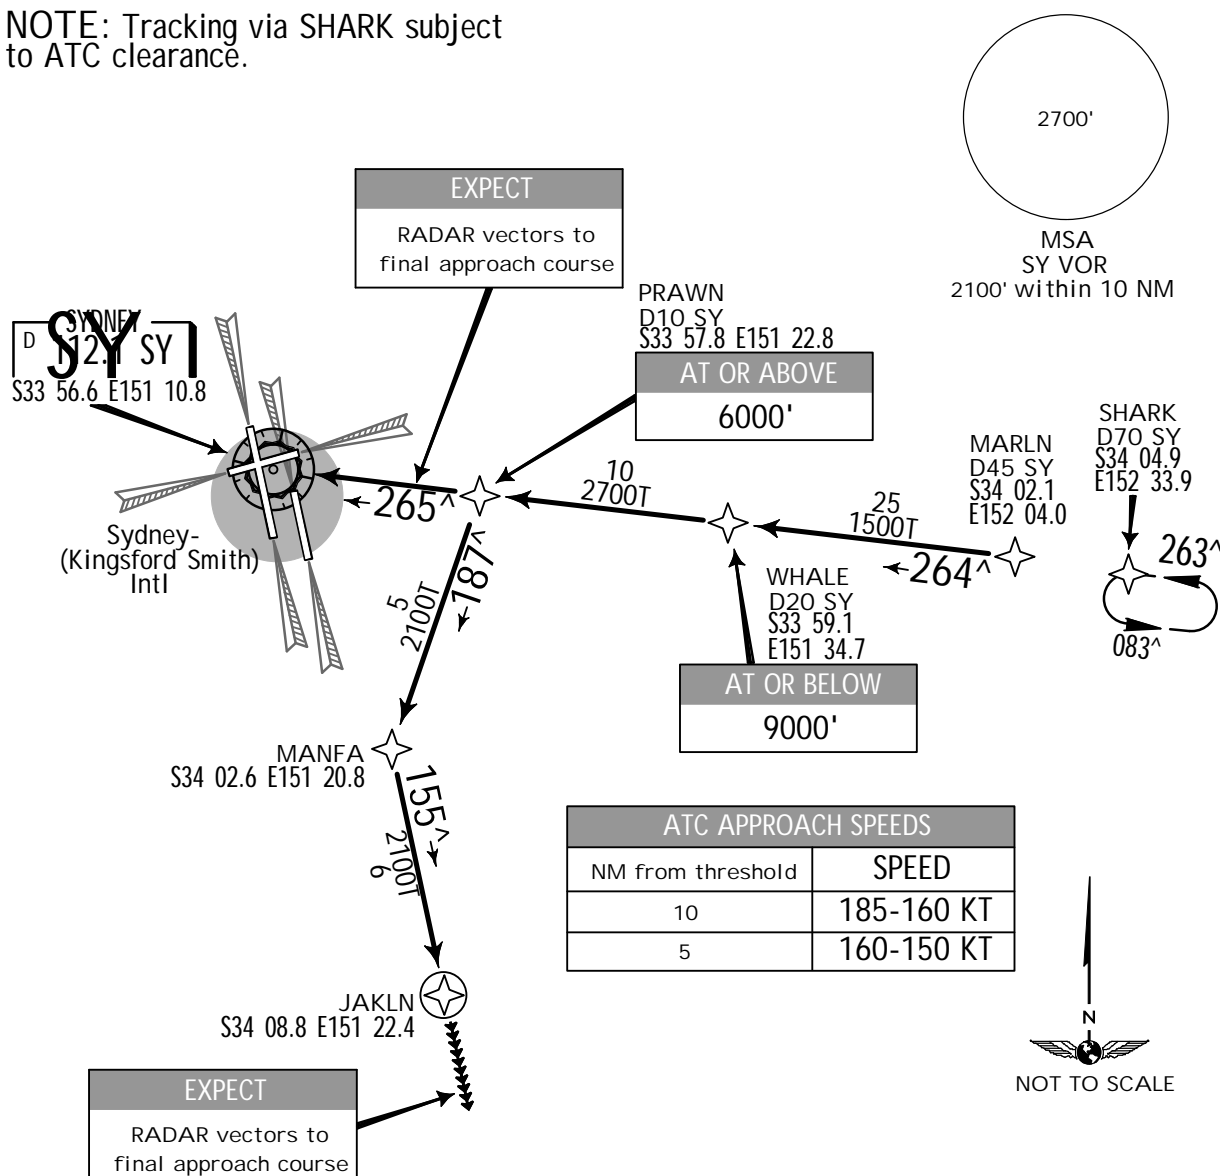

23 MAY 14

$$(10-2F)$$

.Eff.29.May.

.STAR.

ATIS 112.1 118.55 126.25 428

SYDNEY Approach (R) 124.4

SYDNEY, NSW, AUSTRALIA

YSSY -(KINGSFORD SMITH) INTL

TRANS LEVEL: FL 110
TRANS ALT: 10000'

ODALE FOUR ARRIVAL [ODALE4]

SPEED: MAX IAS 250 KT BELOW 10000'

ARRIVAL

From ODALE track SY R-242 to SY VOR.
Cross MITSA at or below 7000'.
EXPECT RADAR vectors to final approach
course when inside D20 SY.


GNSS permitted in lieu of DME
Reference waypoint SY VOR

ATC APPROACH SPEEDS	
NM from threshold	SPEED
10	185-160 KT
5	160-150 KT

2700'

MSA
SY VOR

2100' within 10 NM

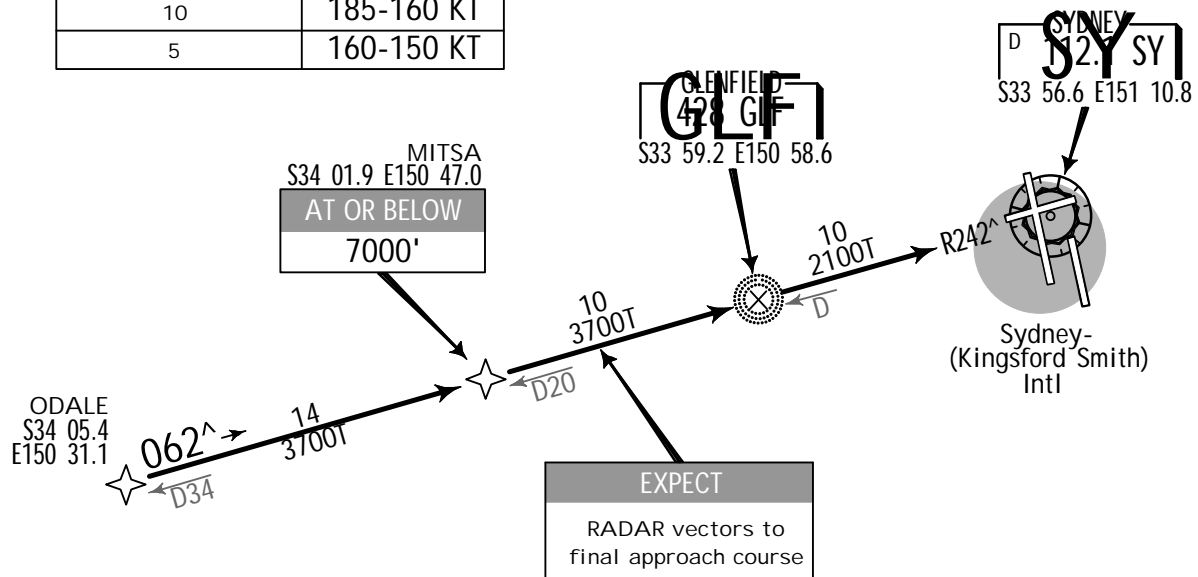

NOT TO SCALE

▲ LOST COMMS ▼ LOST COMMS ▼ LOST COMMS ▼ LOST COMMS ▼ LOST COMMS ▲

COMMUNICATIONS FAILURE: PROCEDURE IN IMC

Comply with vertical navigation requirements, but not below MSA. Track via the latest STAR clearance to the nominated runway, then fly the most suitable approach in accordance with EMERGENCY PROCEDURES

JEPPESEN

23 MAY 14

(10-2G)

.Eff.29.May.

.RNAV.STAR.

SYDNEY, NSW, AUSTRALIA

ATIS 112.1 118.55 126.25 428

SYDNEY Approach (R) North 124.4

YSSY -(KINGSFORD SMITH) INTL

TRANS LEVEL: FL 110
TRANS ALT: 10000'

RIVET ONE ARRIVAL [RIVET1]

SPEED: MAX IAS 250 KT BELOW 10000'

ARRIVAL


From RIVET track 049° to TAMMI.
Cross TAMMI at or below 9000'.

RWY 07: EXPECT RADAR vectors to final.

RWYS 16L/R, 25: Track 049° to BOOGI. Cross BOOGI at or above 6000'. Track 049° to SY VOR.
EXPECT RADAR vectors to final.

RWYS 34L/R: Track 049° to BOOGI. Cross BOOGI at or above 6000'. Turn RIGHT, track 121° to DUDOK. Turn RIGHT, track 155° to NASHO. Track 155°. EXPECT RADAR vectors to final.

LOST COMMS ▼ LOST COMMS ▼ LOST COMMS ▼ LOST COMMS ▼ LOST
COMMUNICATIONS FAILURE:
PROCEDURE IN IMC
Squawk 7600.
Comply with vertical navigation requirements, but not below MSA.
Track via the latest STAR clearance to the nominated runway, then fly the most suitable approach in accordance with EMERGENCY PROCEDURES.
LOST COMMS ▲ LOST COMMS ▲ LOST COMMS ▲ LOST COMMS ▲ LOST

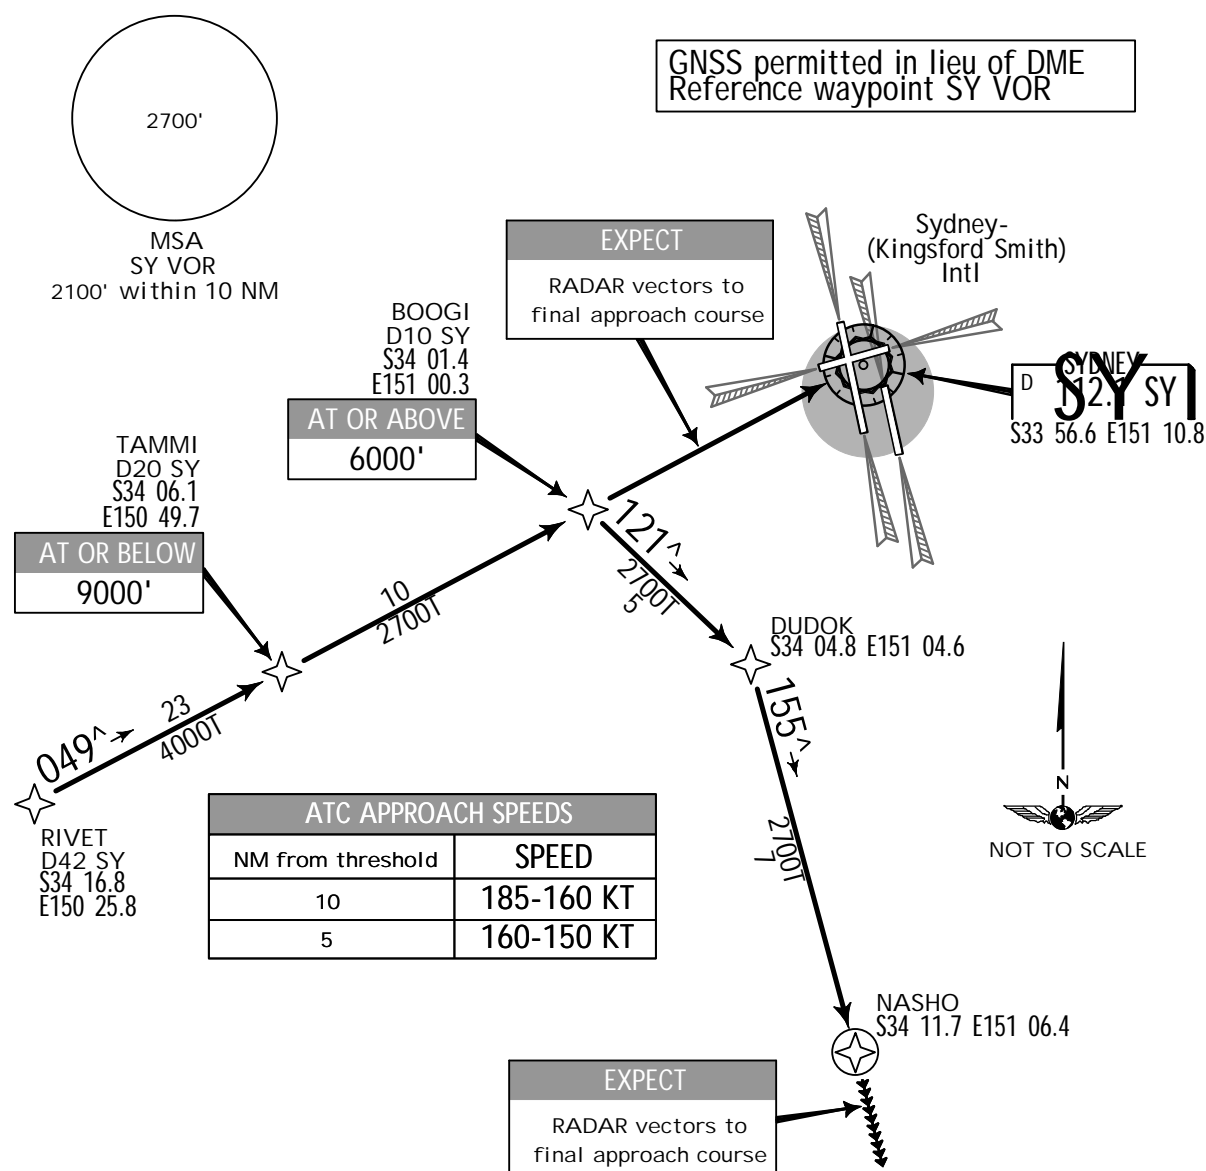

JEPPESSEN 23 MAY 14 (10-3A) .Eff.29.May.

.RNAV.SID.

SYDNEY, NSW, AUSTRALIA

YSSY -(KINGSFORD SMITH) INTL

SYDNEY Clearance 133.8
Ground East of RWY 16R/34L 121.7
West of RWY 16R/34L 126.5 when Clearance inop.
Departure (R) North & East 123.0
South, West & Northwest 129.7

TRANS LEVEL: FL 110
TRANS ALT: 10000'

JETS ONLY

RUNWAY 16L

ABBEY TWO DEPARTURE


[ABBEY2]

SPEED: MAX IAS 250 KT BELOW 10000'


Minimum required climb gradient 4.7% to 1000'.

Gnd speed-Kts	75	100	150	200	250	300
4.7% V/V (fpm)	357	476	714	952	1190	1428

RWY 16L: Track 155°. At 500' turn LEFT track 100° to intercept and track SY R-128 to KEVIN (D15 SY). After passing KEVIN (D15 SY) and 6000' turn RIGHT track direct to JULIA. Cross JULIA at or above 10000'. Track 218° to ABBEY. Turn RIGHT, track 226° to WOL NDB, then as cleared.



MSA SY VOR
2100' within 10 NM

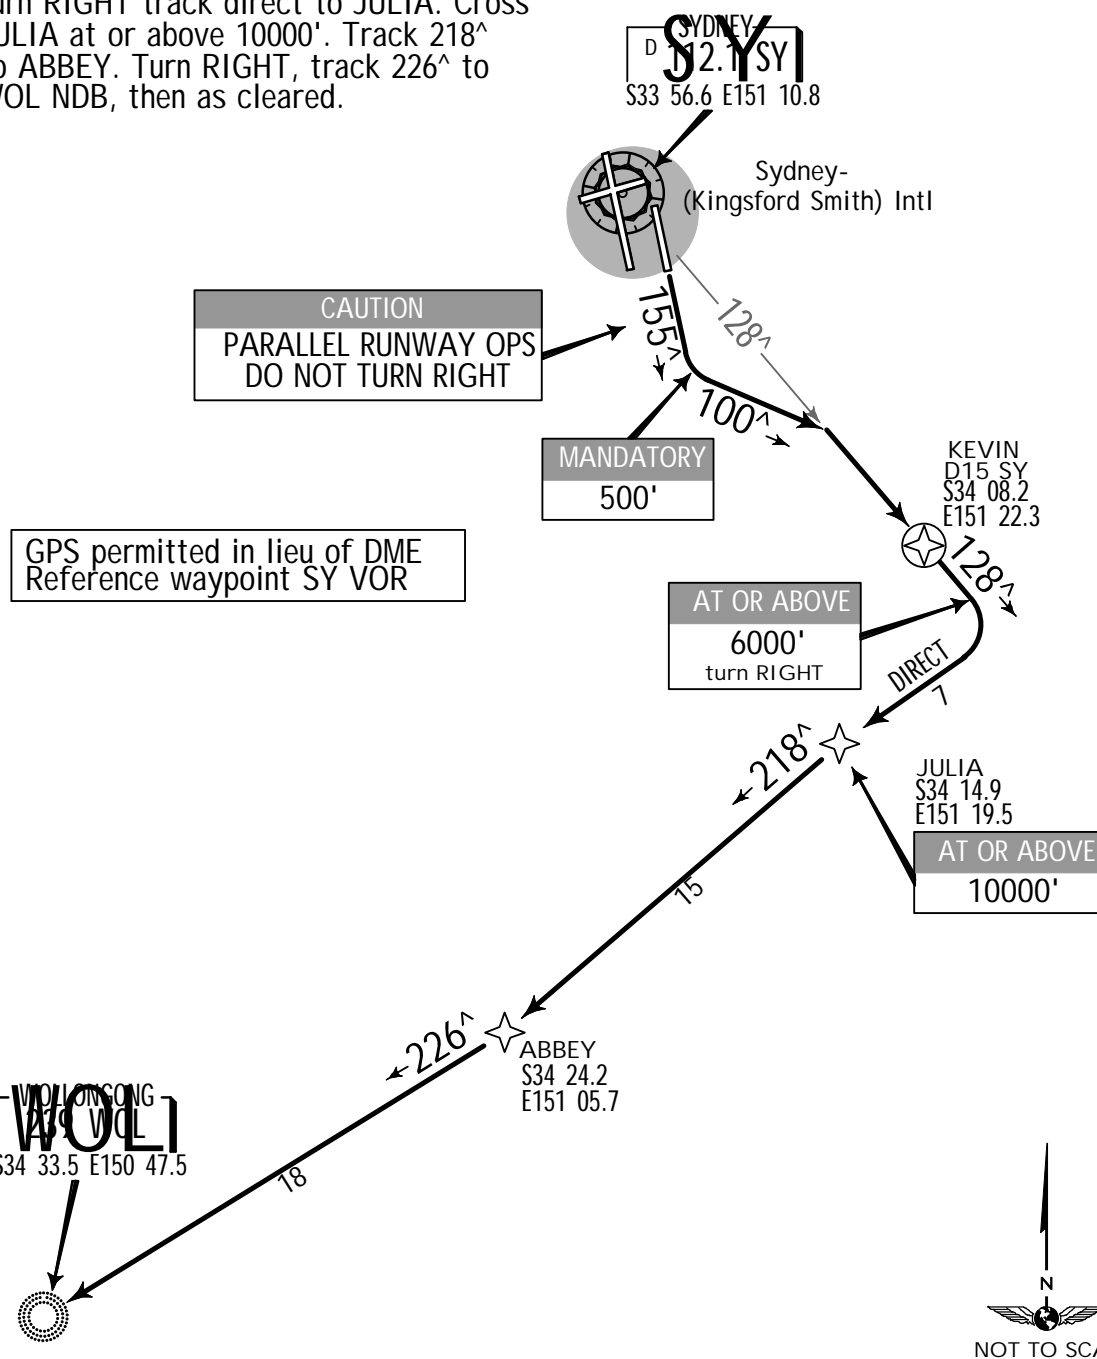

JEPPESEN 20 AUG 10 (10-3A-1) .Eff.25.Aug.1600Z.

.SID.

SYDNEY Clearance 133.8

Ground 126.5 when Clearance inop.

Departure (R) North & East 123.0

South, West & Northwest 129.7

SYDNEY, NSW, AUSTRALIA

YSSY -(KINGSFORD SMITH) INTL

TRANS LEVEL: FL 110

TRANS ALT: 10000'

RUNWAY 16L


BOTANY BAY SIX DEPARTURE (VISUAL)

SPEED: MAX IAS 250 KT BELOW 10000'

Minimum required climb gradient 5.4% to 700' then 3.3%.

Gnd speed-Kts	75	100	150	200	250	300
3.3% V/V (fpm)	251	334	501	668	835	1003
5.4% V/V (fpm)	410	547	820	1094	1367	1641

RWY 16L: Track 155°. As soon as practicable turn LEFT. Track visually through Botany Bay Heads. Intercept and track SY R-128 by SY 6 DME. EXPECT RADAR vectors at or before KEVIN (D15 SY). For aircraft cleared via ENTRA - See SPECIAL REQUIREMENT A



MSA
SY VOR
2100' within 10 NM

A SPECIAL REQUIREMENT
FOR ACFT CLEARED VIA ENTRA-BANDA:
REACH FL 180 by SY 47 DME
REACH FL 220 by SY 60 DME
REACH FL 270 by SY 90 DME
IF UNABLE TO COMPLY ADVISE ATC.

SYDNEY
D 12. SY
S33 56.6 E151 10.8

Sydney-
(Kingsford Smith) Intl


CAUTION
PARALLEL
RUNWAY OPS
DO NOT
TURN RIGHT

Botany Bay Heads

GPS permitted in lieu of DME
Reference waypoint SY VOR

KEVIN
S34 08.2 E151 22.3
EXPECT

RADAR vectors
at or before
KEVIN (D15 SY)



NOT TO SCALE

JEPPESEN

23 MAY 14

(10-3B)

Eff. 29 May

SYDNEY, NSW, AUSTRALIA

SYDNEY Clearance 133.8
Ground East of RWY 16R/34L 121.7
West of RWY 16R/34L 126.5 when Clearance inop.
Departure (R) South 129.7

YSSY -(KINGSFORD SMITH) INTL

TRANS LEVEL: FL 110
TRANS ALT: 10000'

NON-JETS ONLY

RUNWAYS 16R, 34L SOUTH

**CLIFF THREE [CLIFF3],
GLENFIELD (GLF) SIX [GLF6] DEPARTURES**


SPEED: MAX IAS 250 KT BELOW 10000'

Minimum required climb gradient:
Rwy 16R: 4.7% to 1000'

Gnd speed-Kts	75	100	150	200	250	300
4.7% V/V (fpm)	357	476	714	952	1190	1428

**DEPARTURE: CLIFF THREE
RWY 16R (NON-JETS):**

CAUTION: Parallel runway operations
- DO NOT TURN LEFT. Track 155°. At 600' turn RIGHT. Intercept and track SY R-195 to CLIFF then follow transition instructions.

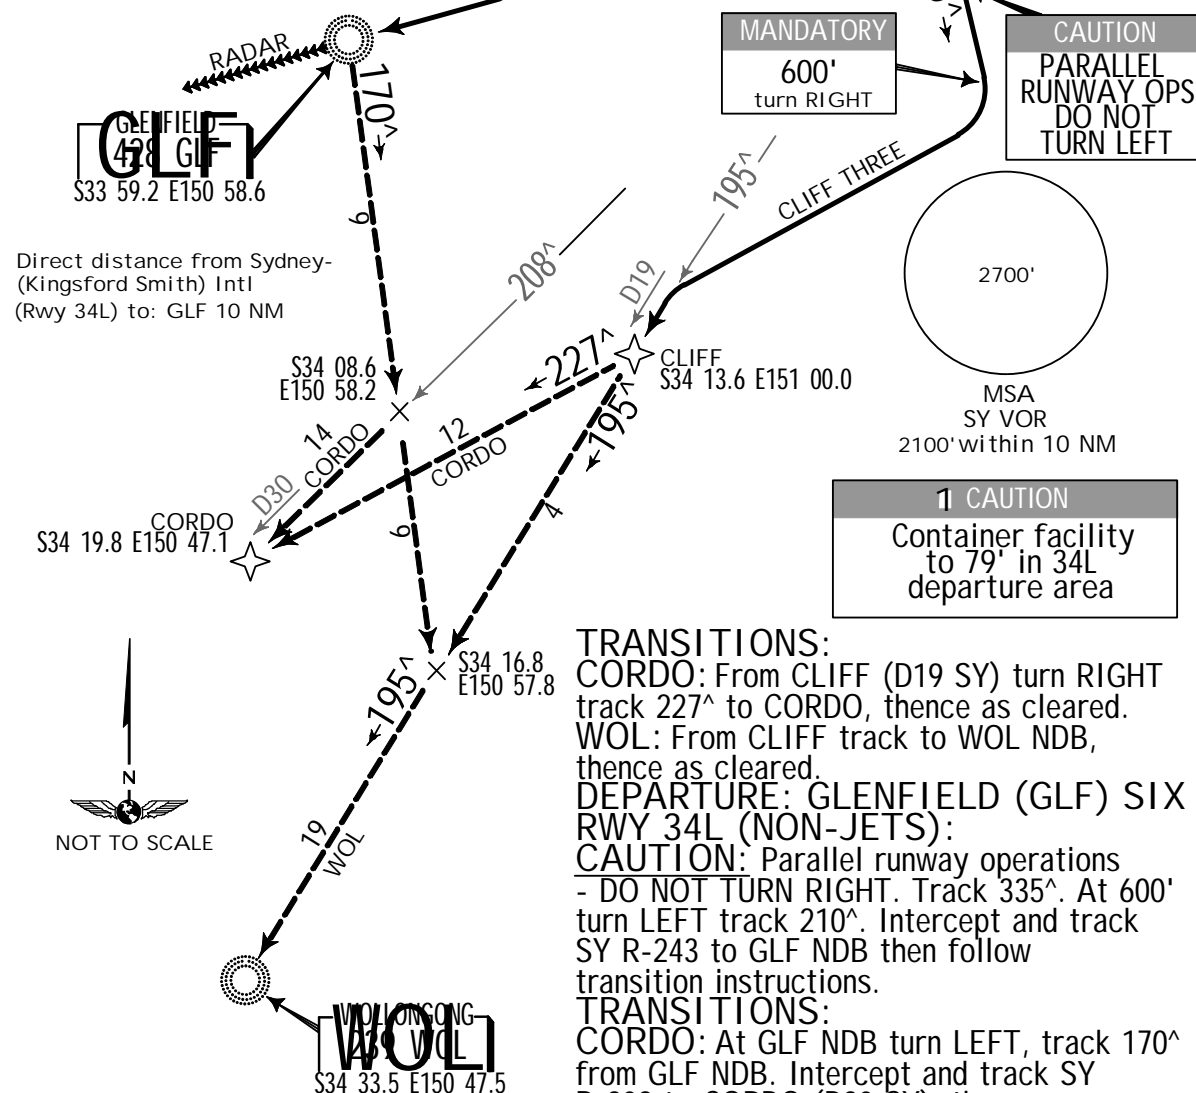

GNSS permitted in lieu of DME
Reference waypoint SY VOR



23 MAY 14

(10-3C)

Eff. 29 May

SYDNEY, NSW, AUSTRALIA

SYDNEY Clearance 133.8

Ground East of RWY 16R/34L 121.7

West of RWY 16R/34L 126.5

Departure (R) 128.3

when Clearance
inop.

YSSY -(KINGSFORD SMITH) INTL

TRANS LEVEL: FL 110
TRANS ALT: 10000'

CURFEW FOUR DEPARTURE [CURFE4]


RUNWAY 16R

SPEED: MAX IAS 250 KT BELOW 10000'


Minimum required climb gradient:
4.7% to 1000' (sunrise to sunset).

Gnd speed-Kts	75	100	150	200	250	300
4.7% V/V (fpm)	357	476	714	952	1190	1428

RWY 16R: Track 155°. At 800' turn RIGHT
to intercept SY R-168. EXPECT RADAR
vectors at or before DEBOS (D15 SY).



MSA
SY VOR
2100' within 10 NM

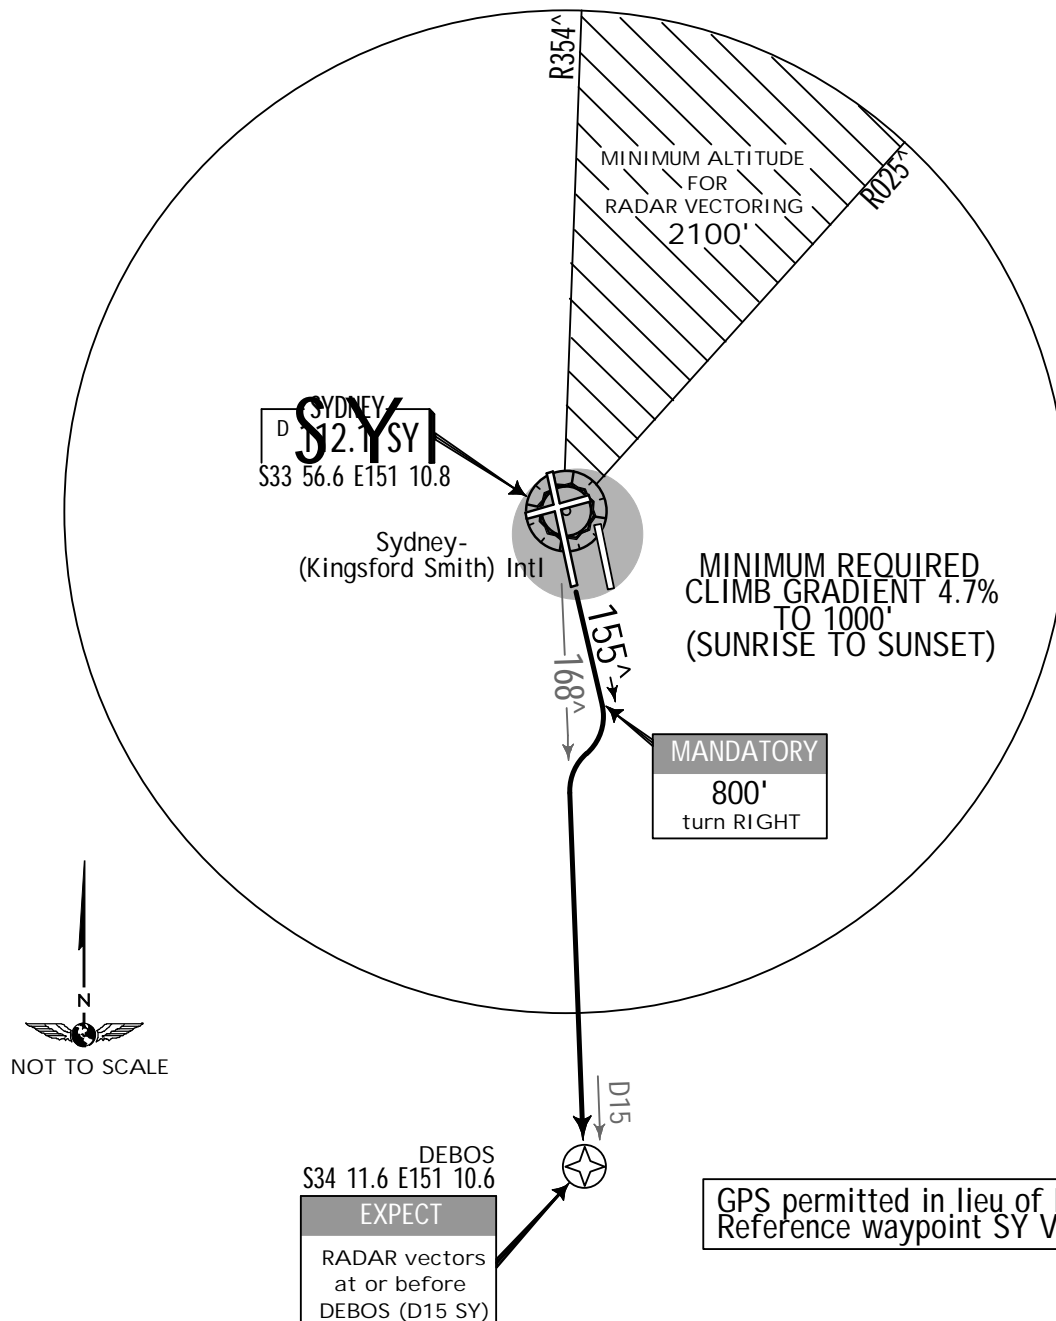

JEPPESEN

8 NOV 13

10-3D

Eff. 14 Nov.

.RNAV.SID.

SYDNEY Clearance 133.8

Ground 126.5 when Clearance inop.

Departure (R) North & East 123.0

South, West & Northwest 129.7

SYDNEY, NSW, AUSTRALIA

YSSY -(KINGSFORD SMITH) INTL

TRANS LEVEL: FL 110

TRANS ALT: 10000'

RUNWAY 16R

JETS ONLY


DEENA FOUR DEPARTURE

[DEENA4]

SPEED: MAX IAS 250 KT BELOW 10000'

Minimum required climb gradient 4.7% to 1000'.

Gnd speed-Kts	75	100	150	200	250	300
4.7% V/V (fpm)	357	476	714	952	1190	1428



MSA
SY VOR
2100' within 10 NM

DEPARTURE

CAUTION: Parallel runway operations - DO NOT TURN LEFT.


Track 155°. As soon as practicable turn RIGHT, track direct to DUNES (D5 SY). From DUNES turn LEFT track 152° to DEENA, then follow transition instructions.

TRANSITIONS

KATOOMBA (KAT): At DEENA, turn RIGHT if through 6000', OR track 152° until past 6000' then turn RIGHT, track to GLF NDB. From GLF NDB track 283° to KAT NDB, thence as cleared.

RICHMOND (RIC): At DEENA, turn RIGHT if through 6000', OR track 152° until past 6000' then turn RIGHT, track to GLF NDB. From GLF NDB track 324° to RIC NDB, thence as cleared.

WOLLONGONG (WOL): At DEENA track 152° to KAMPI. From KAMPI turn RIGHT track 209° to WOL NDB, thence as cleared.

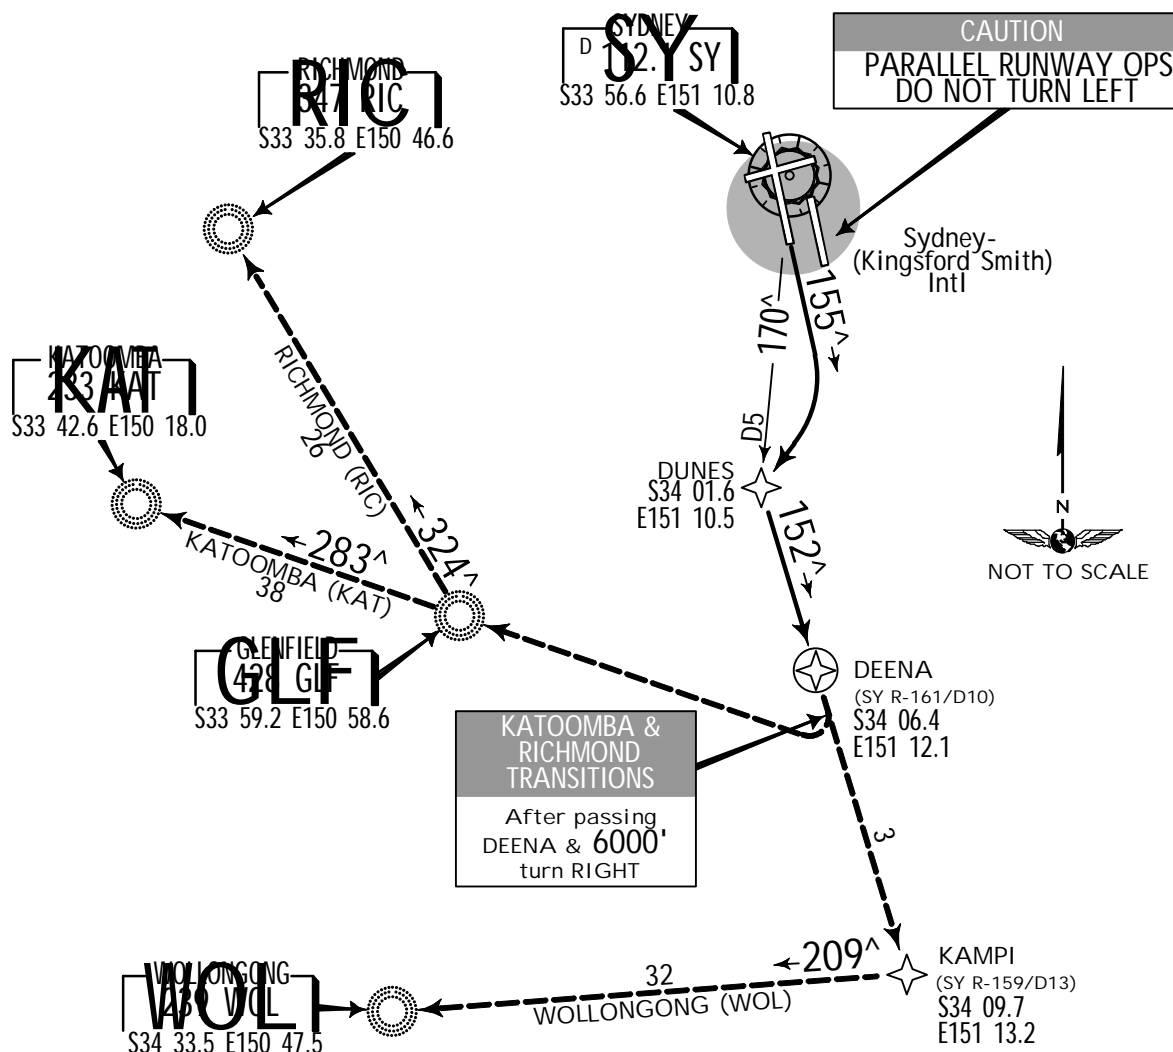

JEPPESEN

8 NOV 13

(10-3E)

.Eff.14.Nov.

.SID.

SYDNEY Clearance 133.8
Ground East of RWY 16R/34L 121.7
West of RWY 16R/34L 126.5 when Clearance inop.
Departure (R) North 123.0

SYDNEY, NSW, AUSTRALIA

YSSY -(KINGSFORD SMITH) INTL

TRANS LEVEL: FL 110
TRANS ALT: 10000'

RUNWAY 34R

JETS ONLY


ENTRA THREE DEPARTURE

[ENTRA3]

SPEED: MAX IAS 250 KT BELOW 10000'

Minimum required climb gradient
4.8% to 1500'.


Gnd speed-Kts	75	100	150	200	250	300
4.8% V/V (fpm)	365	486	729	972	1215	1458




MSA
SY VOR
2100' within 10 NM

DEPARTURE

CAUTION: Parallel runway operations - DO NOT TURN LEFT.
Track 335°. At 500' turn RIGHT intercept SY R-023. Track to HALAS (D7 SY). At HALAS turn RIGHT, track 060° to intercept SY R-038. Track to ENTRA (D34 SY) thence as cleared.
See SPECIAL REQUIREMENT A

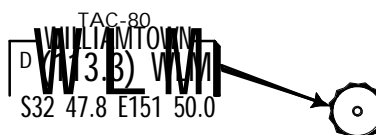

A SPECIAL REQUIREMENT
FOR ACFT CLEARED VIA ENTRA-BANDA:
REACH FL 180 by 47 DME SY
REACH FL 220 by 60 DME SY
REACH FL 270 by 90 DME SY
IF UNABLE TO COMPLY ADVISE ATC.

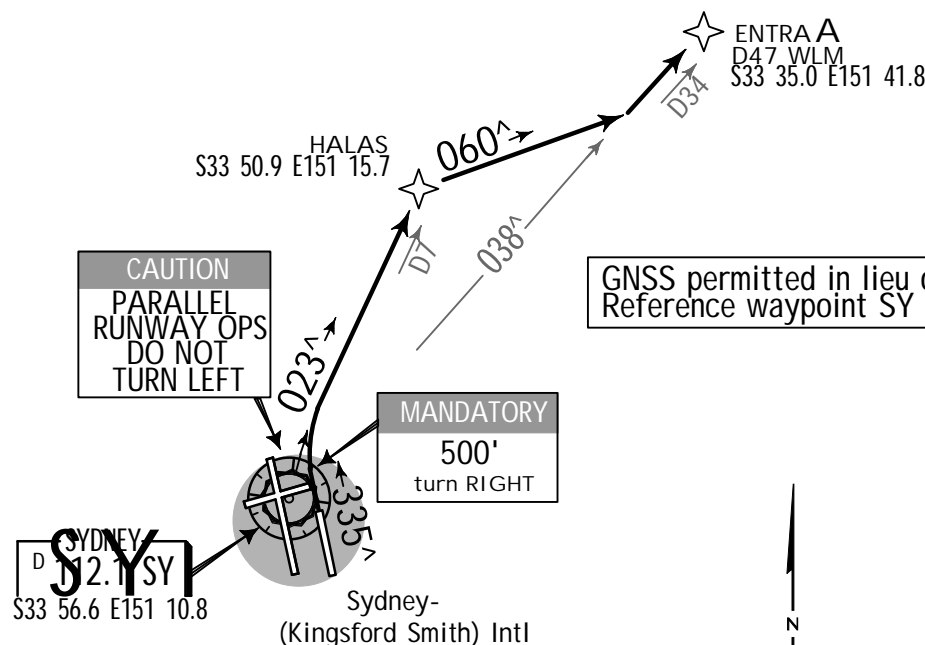

NOT TO SCALE

JEPPESEN

8 NOV 13

10-3F

.Eff.14.Nov.

.SID.

SYDNEY Clearance 133.8
 Ground East of RWY 16R/34L 121.7
 West of RWY 16R/34L 126.5 when Clearance inop.
 Departure (R) North & East 123.0
 South, West & Northwest 129.7

SYDNEY, NSW, AUSTRALIA

YSSY -(KINGSFORD SMITH) INTL

TRANS LEVEL: FL 110
 TRANS ALT: 10000'

JETS ONLY


RUNWAY 07

FISHA FIVE DEPARTURE [FISHA5]

SPEED: MAX IAS 250 KT BELOW 10000'

Minimum required climb gradient
 4.7% to 1500'.

Gnd speed-Kts	75	100	150	200	250	300
4.7% V/V (fpm)	357	476	714	952	1190	1428



MSA
 SY VOR
 2100' within 10 NM

DEPARTURE

Track 062°. At 800' turn RIGHT intercept and track SY R-066 to FISHA (D10 SY) then follow transition instructions.

TRANSITIONS

RADAR: At FISHA (D10 SY) CONTINUE tracking SY R-066. EXPECT RADAR vectors to cleared route.

WOLLONGONG (WOL): At FISHA (D10 SY) turn RIGHT. Track direct to WOL NDB, thence as cleared.


ENTRA: At FISHA (D10 SY) turn LEFT. Track direct to ENTRA (approx 027°), thence as cleared. See SPECIAL REQUIREMENT . A

GPS permitted in lieu of DME
 Reference waypoint SY VOR

TAC-80
 WOLLONGONG (WOL)
 S32 47.8 E151 50.0

ENTRA A
 D47 WLM
 S33 35.0 E151 41.8

A SPECIAL REQUIREMENT
 FOR ACFT CLEARED VIA ENTRA-BANDA:
 REACH FL 180 by 47 DME SY
 REACH FL 220 by 60 DME SY
 REACH FL 270 by 90 DME SY
 IF UNABLE TO COMPLY ADVISE ATC.

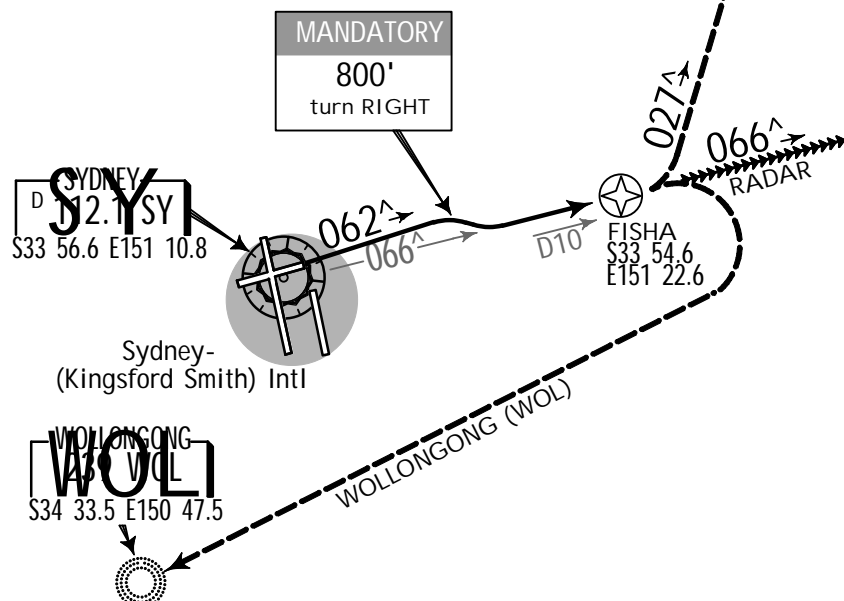

JEPPESSEN

8 NOV 13

(10-3G)

Eff. 14 Nov.

SYDNEY, NSW, AUSTRALIA

SID

SYDNEY Clearance 133.8

Ground East of RWY 16R/34L 121.7

West of RWY 16R/34L 126.5 when Clearance inop.

Departure (R) North 123.0

YSSY -(KINGSFORD SMITH) INTL

TRANS LEVEL: FL 110
TRANS ALT: 10000'**NON-JETS ONLY**

RUNWAYS 07 & 16L

KAMBA FIVE DEPARTURE [KAMBA5]**SPEED:** MAX IAS 250 KT BELOW 10000'**CAUTION:** Parallel runway operations

Minimum required climb gradients:

Rwy 07: 4.7% to 1500'.

Rwy 16L: 4.7% to 1000'.

Gnd speed-Kts	75	100	150	200	250	300
4.7% V/V (fpm)	357	476	714	952	1190	1428

DEPARTURE:

SEE SPECIAL REQUIREMENT.

RWY 07: Track 062°. At 600' turn LEFT intercept SY R-040. After passing D5 SY AND after passing 2000' turn LEFT. Track 360° intercept SY R-013 by SY 15 DME. Track to KAMBA then follow transition instruction.

RWY 16L: Track 155°. At 500' turn LEFT track 080°. At D7 SY turn LEFT track 360° intercept SY R-013 by KAMBA (D30 SY) then follow transition instruction.

TRANSITIONS


WEST MAITLAND (WMD): At KAMBA (D30 SY) track direct to WMD VOR, thence as cleared.

WILLIAMTOWN (WLM): At KAMBA (D30 SY) track direct to WLM NDB, thence as cleared.

SPECIAL REQUIREMENT

FOR ACFT CLEARED VIA KAMBA-WLM:
At or above FL 130:
REACH FL 130 by 45 DME SY
IF UNABLE TO COMPLY ADVISE ATC.

GNSS permitted in lieu of DME
Reference waypoint SY VOR

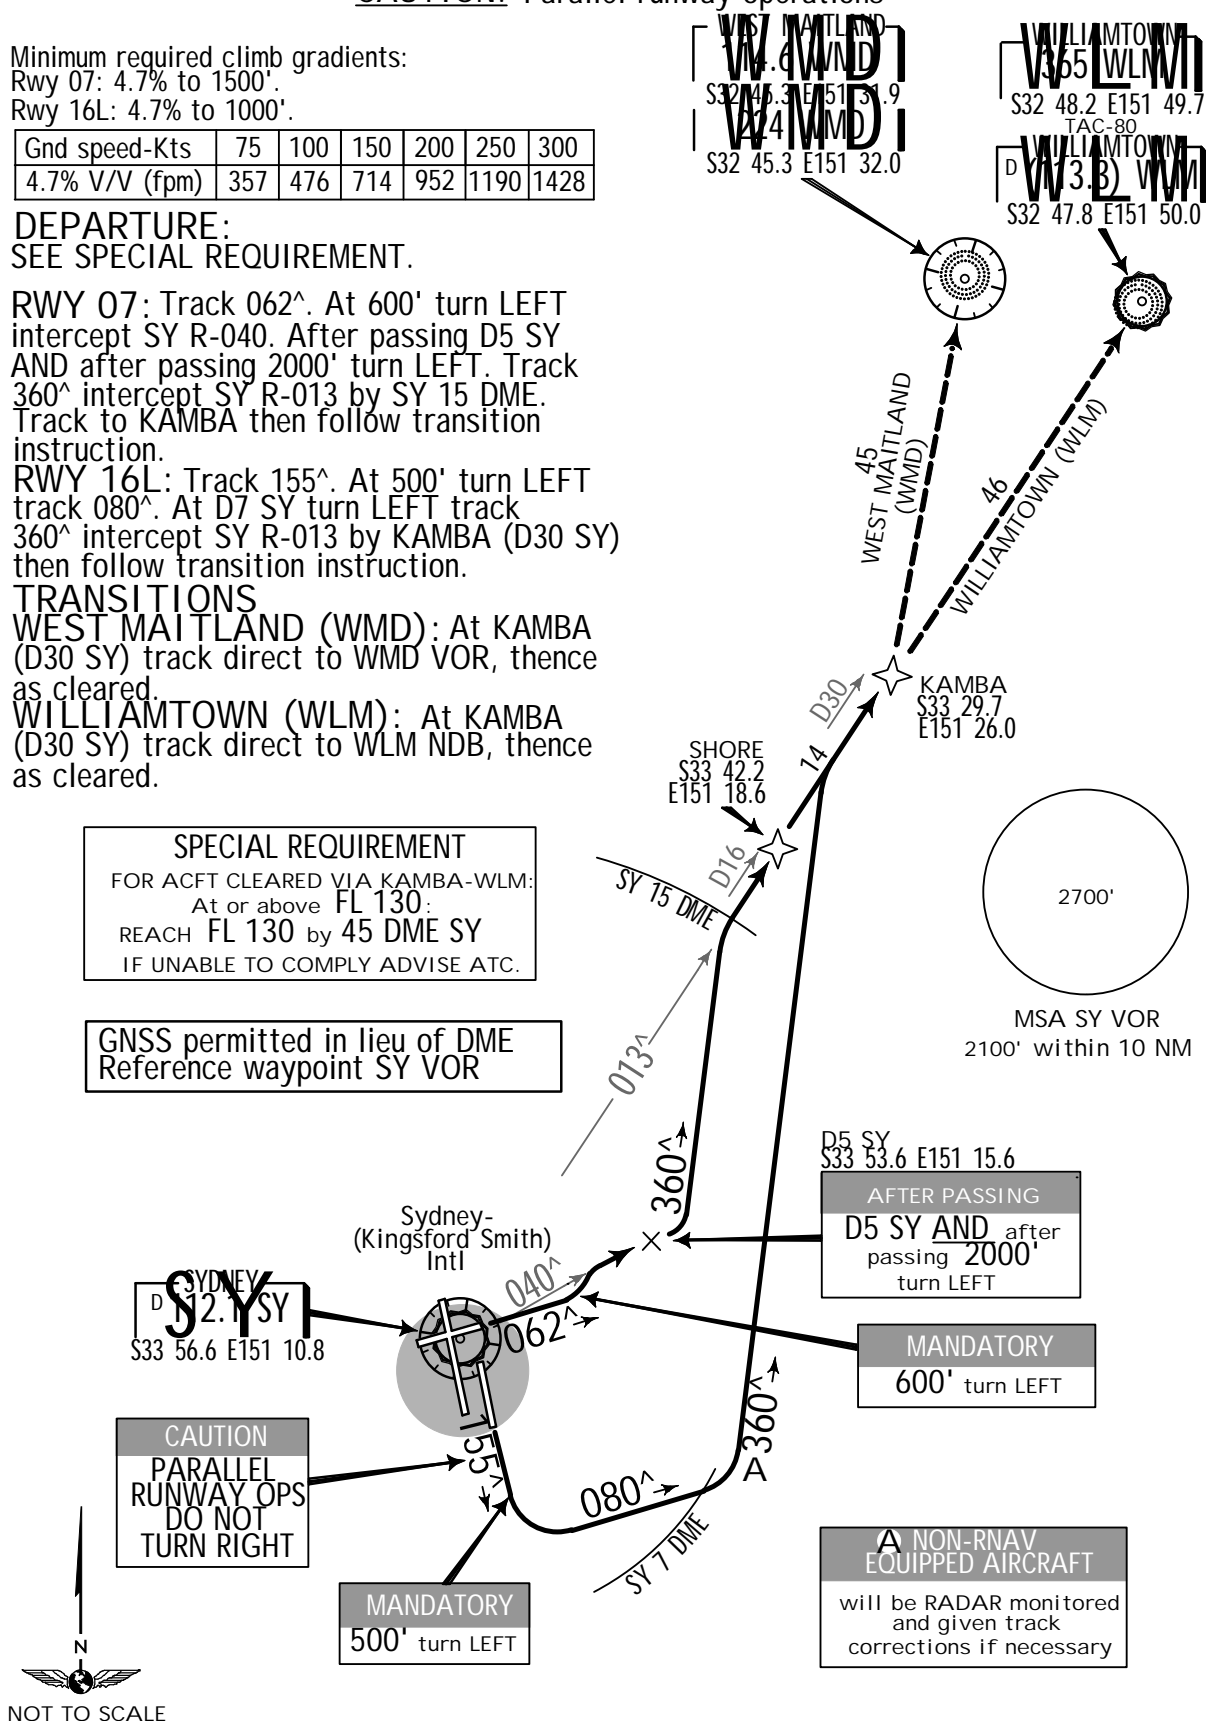

JEPPESEN 23 MAY 14

(10-3H)

.Eff.29.May.

.RNAV.SID.

SYDNEY Clearance 133.8
Ground East of RWY 16R/34L 121.7
West of RWY 16R/34L 126.5 when Clearance inop.
Departure (R) North & East 123.0
South, West & Northwest 129.7

SYDNEY, NSW, AUSTRALIA

YSSY -(KINGSFORD SMITH) INTL

TRANS LEVEL: FL 110
TRANS ALT: 10000'

JETS ONLY


RUNWAY 16R

KAMPI ONE DEPARTURE [KAMPI1]

SPEED: MAX IAS 250 KT BELOW 10000'

Minimum required climb gradient 4.7% to 1000'.

Gnd speed-Kts	75	100	150	200	250	300
4.7% V/V (fpm)	357	476	714	952	1190	1428



MSA SY VOR
2100' within 10 NM

DEPARTURE

CAUTION: Parallel runway operations - DO NOT TURN LEFT.

Track 155°. As soon as practicable turn RIGHT track direct to DUNES (D5 SY).

At DUNES turn LEFT track 152° to KAMPI. At KAMPI continue tracking 152°

EXPECT RADAR vectors to cleared route.

For ACFT cleared via ENTRA see SPECIAL REQUIREMENT.

A

A SPECIAL REQUIREMENT


FOR ACFT CLEARED VIA ENTRA-BANDA:

REACH FL 180 by 47 DME SY

REACH FL 220 by 60 DME SY

REACH FL 270 by 90 DME SY

IF UNABLE TO COMPLY ADVISE ATC.

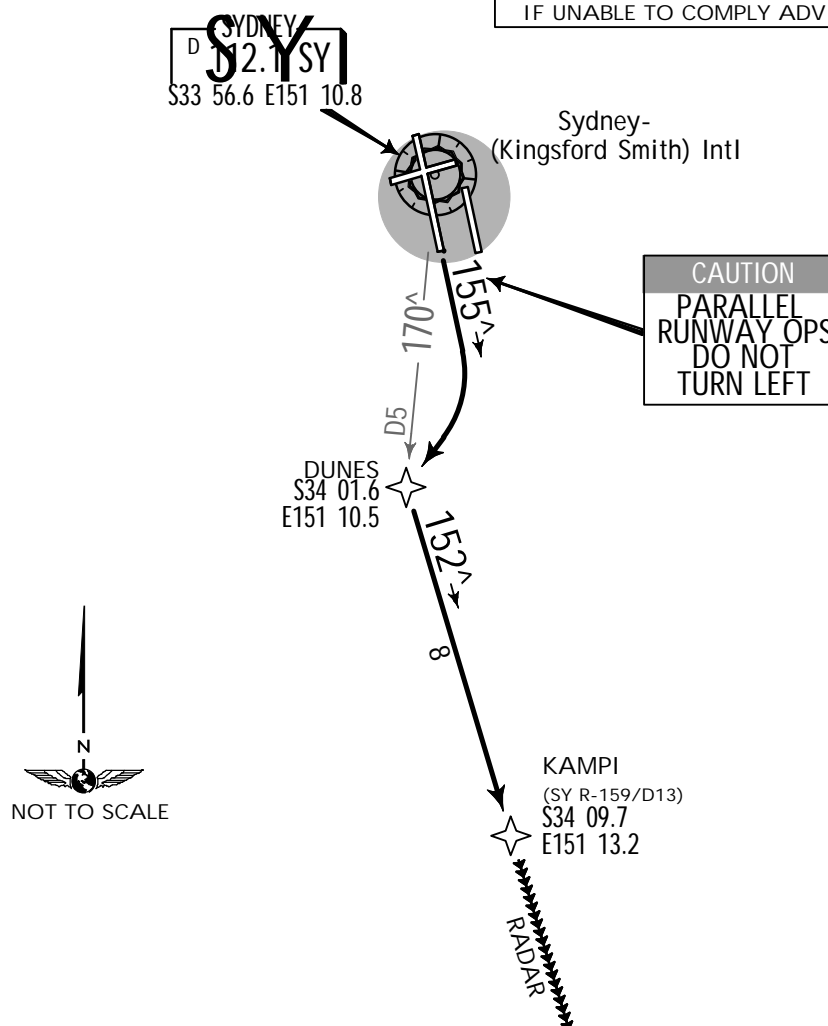

JEPPESEN

23 MAY 14

(10-3J)

.Eff.29.May.

.SID.

SYDNEY Clearance 133.8

Ground East of RWY 16R/34L 121.7

West of RWY 16R/34L 126.5 when Clearance inop.

Departure (R) South 129.7

SYDNEY, NSW, AUSTRALIA

YSSY -(KINGSFORD SMITH) INTL

TRANS LEVEL: FL 110
TRANS ALT: 10000'

JETS ONLY


RWY 34L SOUTHWEST

**KATOOMBA (KAT) ONE [KAT1],
WOLLONGONG (WOL) NINE [WOL9] DEPARTURES**

SPEED: MAX IAS 250 KT BELOW 10000'

Minimum required climb gradient 5.9% to 2500'.

Gnd speed-Kts	75	100	150	200	250	300
5.9% V/V (fpm)	448	597	896	1195	1494	1792



MSA
SY VOR
2100' within 10 NM

RWY 34L (JET):

CAUTION: Parallel runway operations - DO NOT TURN RIGHT.

Track 335°. At 800' turn LEFT. Track 290° to SY 10 DME.

At SY 10 DME turn LEFT.


FOR: KAT

Track direct to KAT NDB, thence via cleared route.

FOR: WOL

Track 260°. After passing 7000', turn LEFT. Track direct to GLF NDB.

From GLF NDB track 182° to WOL NDB, thence via cleared route.

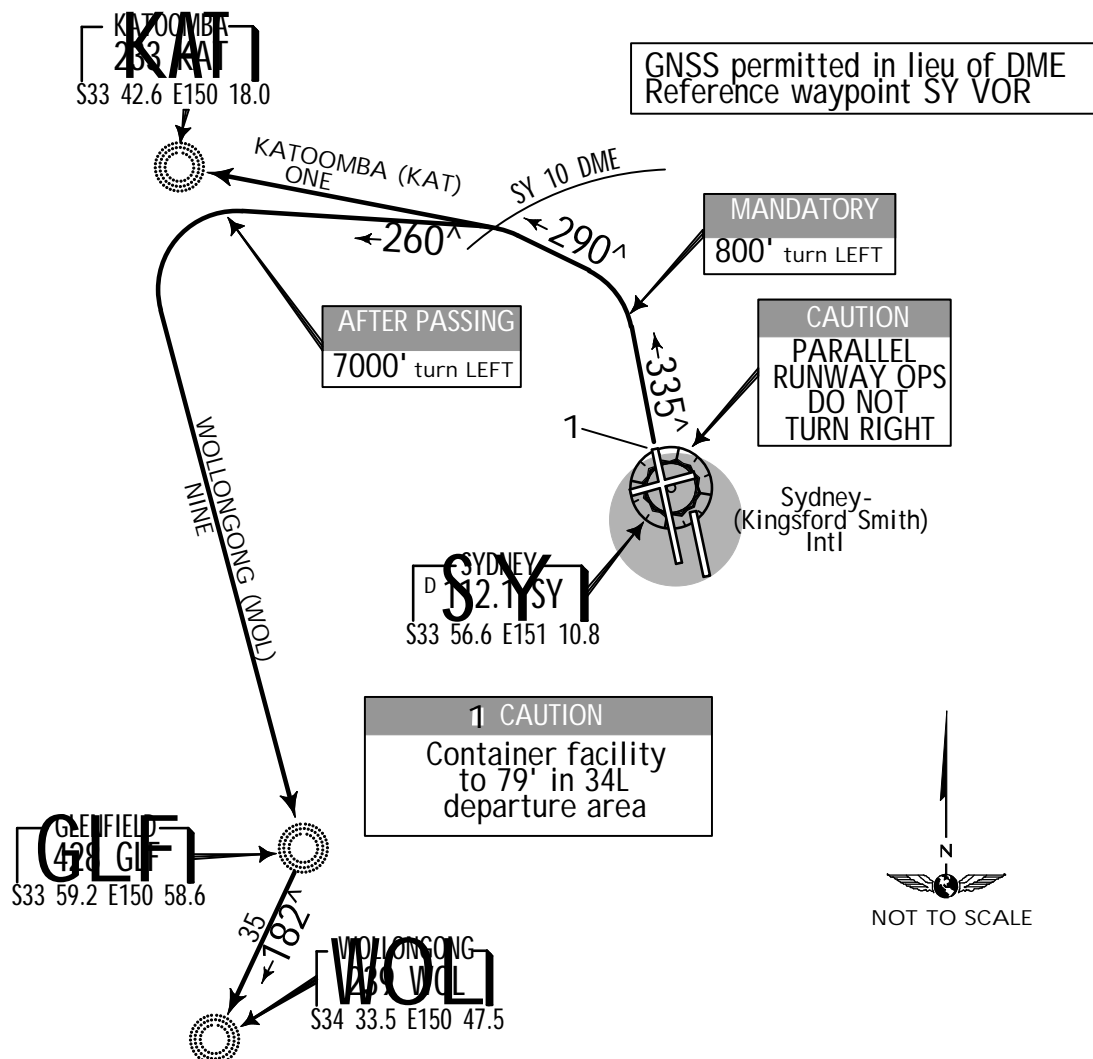

JEPPESEN

8 NOV 13

10-3K

.Eff.14.Nov.

.SID.

SYDNEY Clearance 133.8

Ground 126.5 when Clearance inop.

Departure (R) North & East 123.0

South, West & Northwest 129.7

SYDNEY, NSW, AUSTRALIA

YSSY -(KINGSFORD SMITH) INTL


TRANS LEVEL: FL 110
TRANS ALT: 10000'**JETS ONLY**

RUNWAY 16L

KEVIN THREE DEPARTURE
[KEVIN3]**SPEED:** MAX IAS 250 KT BELOW 10000'

Minimum required climb gradient 4.7% to 1000'.

Gnd speed-Kts	75	100	150	200	250	300
4.7% V/V (fpm)	357	476	714	952	1190	1428

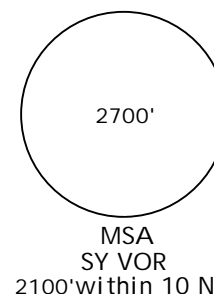**DEPARTURE**

CAUTION: Parallel runway operations - DO NOT TURN RIGHT.
Track 155°. At 500' turn LEFT track 100° intercept and track SY R-128 to KEVIN (D15 SY) then follow transition instructions.

TRANSITIONS


RADAR: At KEVIN (D15 SY) CONTINUE tracking SY R-128. EXPECT RADAR vectors to cleared route.

ENTRA: At KEVIN (D15 SY) turn LEFT track 080°. On passing 10000' turn LEFT track direct to ENTRA, thence as cleared.

See SPECIAL REQUIREMENTS .A

GPS permitted in lieu of DME
Reference waypoint SY VOR

A SPECIAL REQUIREMENT
FOR ACFT CLEARED VIA ENTRA-BANDA:
REACH FL 180 by 47 DME SY
REACH FL 220 by 60 DME SY
REACH FL 270 by 90 DME SY
IF UNABLE TO COMPLY ADVISE ATC.

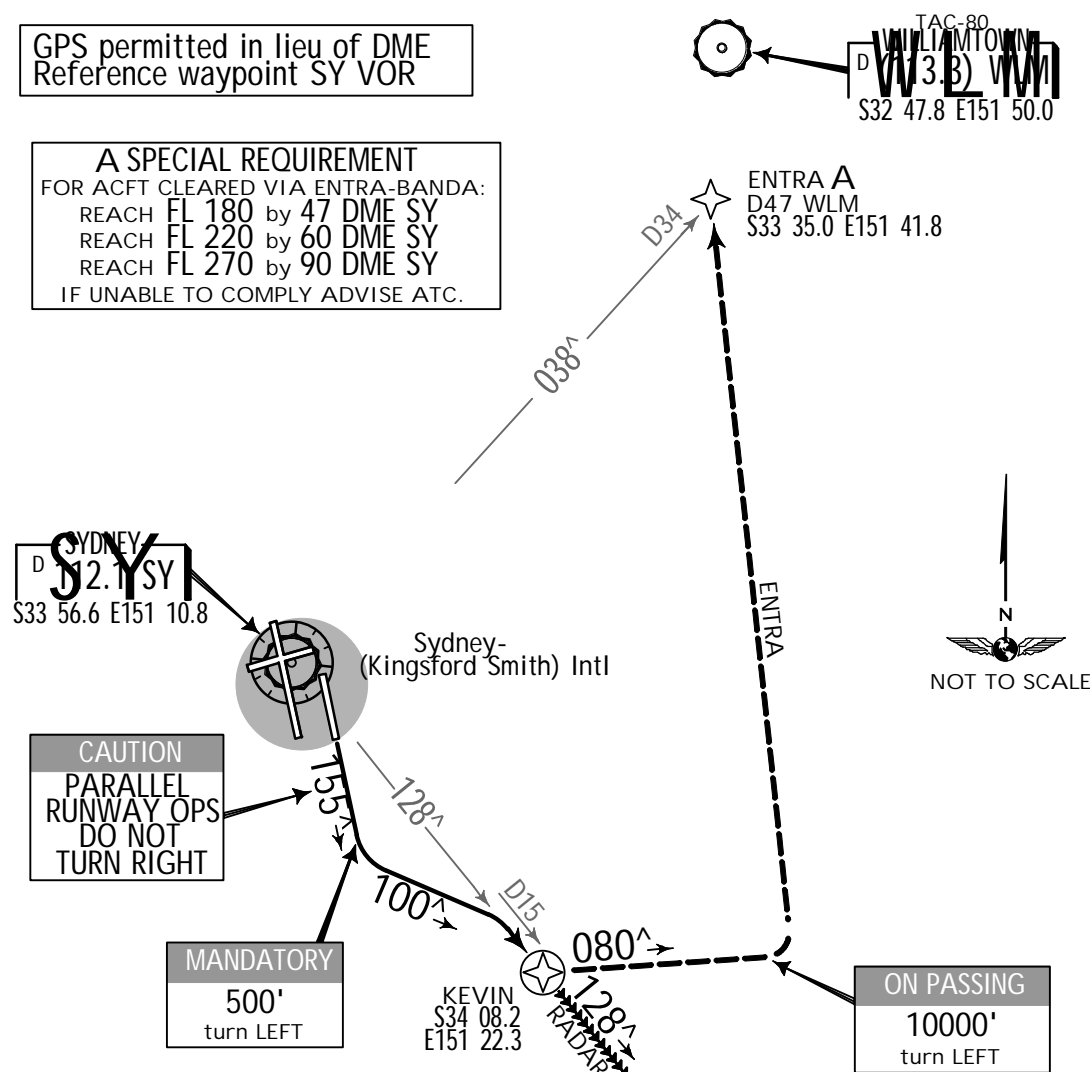

JEPPESEN

8 NOV 13

(10-3L)

.Eff.14.Nov.

.SID.

SYDNEY Clearance 133.8
Ground East of RWY 16R/34L 121.7
West of RWY 16R/34L 126.5 when Clearance inop.
Departure (R) North & East 123.0
South, West & Northwest 129.7

SYDNEY, NSW, AUSTRALIA

YSSY -(KINGSFORD SMITH) INTL

TRANS LEVEL: FL 110
TRANS ALT: 10000'

JETS ONLY


RUNWAY 34R

MARUB FOUR DEPARTURE [MARUB4]

SPEED: MAX IAS 250 KT BELOW 10000'

Minimum required climb gradient 4.8% to 1500'.

Gnd speed-Kts	75	100	150	200	250	300
4.8% V/V (fpm)	365	486	729	972	1215	1458



MSA
SY VOR
2100' within 10 NM


DEPARTURE

CAUTION: Parallel runway operations - DO NOT TURN LEFT.
Track 335°. At 500' turn RIGHT A intercept and track SY R-075 to MARUB.
Then follow transition instructions.

TRANSITIONS

RADAR: At MARUB (D15 SY) continue tracking SY R-075. EXPECT RADAR vectors to cleared route.

WOLLONGONG (WOL): At MARUB (D15 SY) turn RIGHT track 144°. After passing 10000' turn RIGHT track to WOL NDB, thence as cleared.

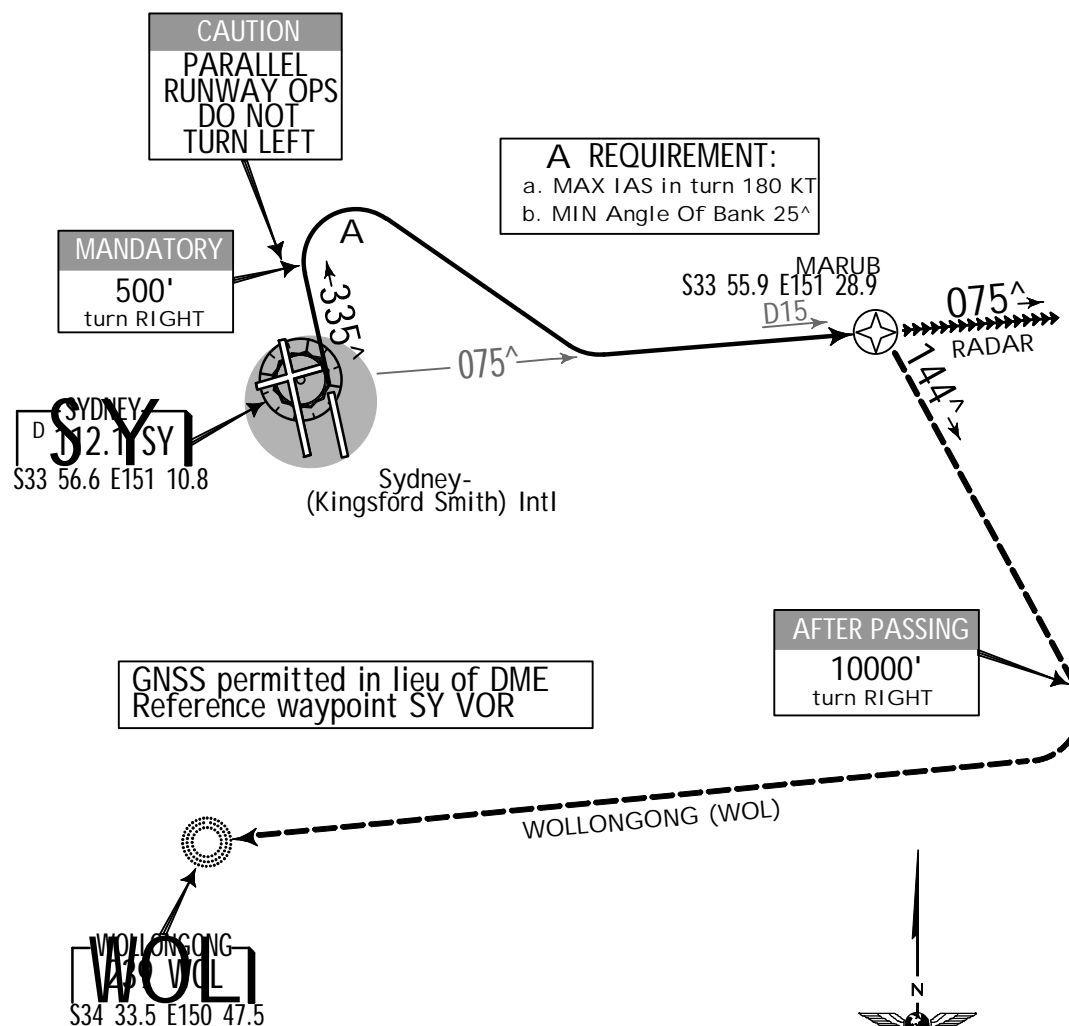

JEPPESEN

23 MAY 14

10-3M

.Eff.29.May.

.SID.

SYDNEY Clearance 133.8
Ground East of RWY 16R/34L 121.7
West of RWY 16R/34L 126.5 when Clearance
Departure (R) North & East 123.0 inop.
South, West & Northwest 129.7

SYDNEY, NSW, AUSTRALIA

YSSY -(KINGSFORD SMITH) INTL


TRANS LEVEL: FL 110
TRANS ALT: 10000'

JETS ONLY

RUNWAY 34L

RICHMOND (RIC) TWO DEPARTURE [RIC2]

SPEED: MAX IAS 250 KT BELOW 10000'



MSA
SY VOR
2100' within 10 NM

Minimum required climb gradient 5.6% to 2500'.

Gnd speed-Kts	75	100	150	200	250	300
5.6% V/V (fpm)	425	567	851	1134	1418	1701

DEPARTURE

CAUTION: Parallel runway operations - DO NOT TURN RIGHT.
Track 335°. At 1500' turn LEFT, track direct RIC NDB, then follow transition instruction.


TRANSITION

RADAR: After passing SY 12 DME, EXPECT RADAR vectors to cleared route.
For aircraft cleared via ENTRA - See SPECIAL REQUIREMENT . A

RICHMOND (RIC): Track to RIC NDB, thence as cleared.

A SPECIAL REQUIREMENT
FOR ACFT CLEARED VIA ENTRA-BANDA:
REACH FL 180 by 47 DME SY
REACH FL 220 by 60 DME SY
REACH FL 270 by 90 DME SY
IF UNABLE TO COMPLY ADVISE ATC.

GNSS permitted in lieu of DME
Reference waypoint SY VOR

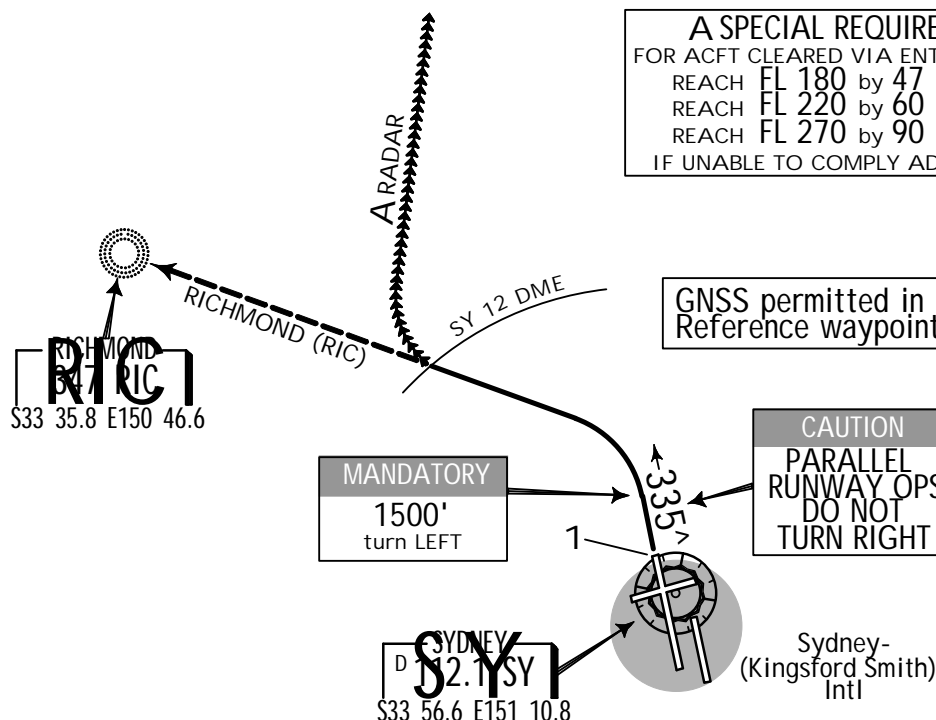

1 CAUTION
Container facility
to 79' in 34L
departure area



YSSY/SYD

10 FEB 06

+JEPPESEN

10-4

SYDNEY, NSW, AUSTRALIA
- (KINGSFORD SMITH) INTL**NOISE ABATEMENT PROCEDURES**

SUMMER (Oct-Mar):	Local Time minus 11 HOURS = UTC
WINTER:	Local Time minus 10 HOURS = UTC

PREFERRED RUNWAYS**a. 2300-0600 LT (applicable to all aircraft)**

	Landing	Take-off
1.	Runway 34L	Runway 16R

b. 0600-0700 LT Mon-Sat and 0600-0800 LT Sun

	Landing	Take-off
1.	Runway 34L	Runway 16L
2.	Runway 34L	Runways 16L and 16R
3.	Runways 34L and 34R	Runway 25
	Runway 25	Runways 16L and 16R
	Runway 07	Runways 16L and 16R
4.	Runways 16L and 16R	Runways 16L and 16R
	Runways 34L and 34R	Runways 34L and 34R
5.	Runway 07 or 25	Runway 07 or 25

c. 0700-2245 LT Mon-Fri, 0700-2200 LT Sat and 0800-2200 LT Sun

	Landing	Take-off
1.	Runway 34L	Runway 16L
2.	Runway 07	Runways 16L and 16R
	Runways 34L and 34R	Runway 25
	Runway 25	Runways 16L and 16R
3.	Runways 16L and 16R	Runways 16L and 16R
	Runways 34L and 34R	Runways 34L and 34R
4.	Runway 07 or 25	Runway 07 or 25

d. 2200-2245 LT Sat and Sun

	Landing	Take-off
1.	Runway 34L	Runway 16L
2.	Runway 34L	Runways 16L and 16R
3.	Runway 25	Runways 16L and 16R
4.	Runway 07	Runways 16L and 16R
5.	Runways 34L and 34R	Runway 25
6.	Runways 16L and 16R	Runways 16L and 16R
	Runways 34L and 34R	Runways 34L and 34R
7.	Runway 07 or 25	Runway 07 or 25

e. 2245-2300 LT

	Landing	Take-off
1.	Runway 34L	Runway 16L
2.	Runway 34L	Runways 16L and 16R
3.	Runway 25	Runways 16L and 16R
	Runway 07	Runways 16L and 16R
4.	Runways 16L and 16R	Runways 16L and 16R

Jet noise abatement climb procedures apply for the following runways:

Runway 16R 2300-0600 HR local time

Runways 34L and 34R at other times.

YSSY/SYD

10 FEB 06

+JEPPESEN

10-4A

SYDNEY, NSW, AUSTRALIA
- (KINGSFORD SMITH) INTL**NOISE ABATEMENT PROCEDURES**

The departure procedure to be used on a specific departure should satisfy the noise abatement objectives of the aerodrome operator in alleviating noise either close to the aerodrome or distant from the aerodrome. Examples of such procedures are given in PANS-OPS Vol. I, Part V, Chapter 3 (NADP 1 and NADP2).

Operators of aircraft which have engines with a by-pass ratio greater than 3.5:1 may use the procedure detailed below as an alternative:

- a. climb at V2+10KT to V2+20KT - or body angle limit speed; and
 - b. maintain take-off power to a height above the aerodrome of 1000ft:
 - c. then maintaining a positive rate of climb, accelerate to zero flap minimum safe maneuvering speed (VZF) retracting flap on schedule;
 - d. then reduce to normal climb power/thrust; and
- Note: For aeroplanes with slow flap retraction, reduce power/ thrust at an intermediate flap setting.*
- e. continue climb at not greater than VZF+10KT to a height above the aerodrome of 3000ft:
 - f. accelerate smoothly to en route climb speed; and
 - g. maintain runway heading unless required to do otherwise in accordance with a SID or specific ATC instruction.

Notwithstanding the wind requirement cited in Jeppesen NOISE ABATEMENT PROCEDURES, the following maximum crosswind / downwind components apply to ATC nominated runways:

- | | | |
|----------|---|---|
| DRY RWYS | - | Max crosswind 20 kts / Max downwind 5 kts |
| WET RWYS | - | Max crosswind 20 kts / No downwind |
| | - | Max crosswind 15 kts / Max downwind 5 kts |

For jet arrivals, ATC will not nominate runways other than 16R or 34L when the runways are wet with a downwind component.

PREFERRED FLIGHT PATHS**a. Arriving Aircraft**

These procedures will apply to all aircraft between **1900 and 0700** local time.

NOTE: For arriving jet aircraft landing Runways 34L/R, preferred flight path procedures apply at all times.

1. Arriving jet aircraft landing Runway 07 will not be permitted to descend below 3000' over built-up areas until aligned with the runway centerline prior to GLF. For arriving jet aircraft landing Runway 25, preferred flight path procedures apply. Further, to assist with noise reduction in the Sydney Terminal Area, it is recommended that, as far as is practicable and to the extent that ATC speed control requirements permit, pilots delay the deployment of flaps until operationally required.
2. Other arriving aircraft will not be permitted to descend below 2000' over built-up areas until aligned with the runway centerline.
3. ATC will route aircraft over less noise-sensitive areas to the various runways whenever possible. Frequent use will be made of seaward tracking during the night hours.

b. Departing Aircraft

ATC will route departing jet aircraft via Standard Instrument Departures which, where applicable, are contained within designated flight corridors, and other aircraft over less noise sensitive areas.

YSSY/SYD

12 NOV 10
Eff. 18 Nov.

+JEPPESEN

10-4B

SYDNEY, NSW, AUSTRALIA
-(KINGSFORD SMITH) INTL**NOISE ABATEMENT PROCEDURES****TRAINING FLIGHTS**

NOTE: Pilots intending to conduct airwork, other than ILS training, in the Sydney Terminal Area must obtain preflight briefing and approval from Sydney ATC, Phone 02 9556 6875 or 9556 6564.

- a. Training is not permitted at Sydney except as set out in the following paragraphs.
- b. At any time, arriving scheduled aircraft may be permitted to carry out a practice ILS or LOC approach at the conclusion of each leg of flights to Sydney, provided that:
 1. the pilot-in-command has stated that the approach is required for license renewal purposes; or
 2. the aircraft lands straight ahead and does not use a runway other than the runway currently in use, merely for the purpose of carrying out the practice.
- c. All training is at the discretion of ATC as traffic and workload permit.
- d. ILS training is also available at Richmond, NSW. See Richmond, NSW 10-4 for conditions.
- e. Flying Operations Inspector test and check flights are permitted on any of the aids in the Sydney Terminal Area, subject to appropriate warning and ATC traffic handling capacity.
- f. No helicopter training is permitted to or from the heliport.
- g. Airline companies may carry out aircraft checking and testing flights, other than under asymmetric conditions, but these will be limited to two circuits by any one company in one day.
- h. Military aircraft on practice ILS or LOC approach must intercept the LOC at or above 3000 feet.

CURFEW**a. Introduction**

The Sydney Airport Curfew Act 1995, the Sydney Airport Curfew Regulations and the Air Navigation (Aerodrome Curfew) Regulations regulate movements at Sydney (Kingsford-Smith) Aerodrome between 2300-0600 hours local time. Additional restrictions apply daily between 2245-2300 hours local time, and on Saturdays and Sundays between 0600-0700 and 2200-2300 hours local time.

The Act contains provisions for severe penalties for any unauthorized operations between the above times and for failure to provide information or the provision of false information.

Specific operators have some concessions which are not listed here.

b. Restrictions Applicable to all Aircraft

The restrictions listed in this paragraph are applicable to all aircraft, including propeller driven aircraft, over 34,000kg MTOW. There are some concessions for specified classes of aircraft which are listed in the section titled 'Concessions for International Aircraft'.

YSSY/SYD

12 NOV 10
Eff. 18. Nov.

+JEPPESEN

10-4C

SYDNEY, NSW, AUSTRALIA
-(KINGSFORD SMITH) INTL**NOISE ABATEMENT PROCEDURES****c. Group of Aircraft that can Operate**

Only the following aircraft may take off or land at Sydney Aerodrome between 2300 and 0600 hours local time:

1. Propeller-driven aircraft with a MTOW of 34,000kg (74,957 lbs) or less that meet the noise level requirements of ICAO Annex 16, Volume 1, Part II, Chapter 3, 5, 6 or 10 (as appropriate to the aircraft classification).
2. The following types of aircraft:

BAe 125-800B;	*Gulfstream V
Beech 400A/Beechjet 400A/ Hawker 400XP	Hawker 800XP/850XP/Horizon
Canadair Challenger 300/601/ 604	HS 125-700B
Cessna 680	Learjet 31A/35/36/40/45XR/60
Cessna Citation 500/525/550/ 560/650/750	Legacy EMB-135
Falcon 10/50/50EX/200/900/ 900C/900EX/2000/2000EX	Mitsubishi MU-300
*Global Express	Premier 1/1A
*Global 5000	Westwind 1124
*Gulfstream IV/SP/G300/ G350/G400/G450/G500/G550	

*Must have a maximum take-off weight of 34,000kg (74,957 lbs) or less

d. Available Runways

All aircraft permitted to operate during the curfew period, and during the restricted times around the curfew period, must use the following runways, unless the provisions of paragraphs e. or f. apply:

1. for landing:
 - (a) 0600-0700 local time & 2200-2300 local time (Sat & Sun) only Rwy 34L, unless another runway is nominated by Air Traffic Control;
 - (b) 2300-0600 local time (Daily) only Rwy 34L;
2. for take-off:
 - (a) 0600-0700 local time & 2200-2245 local time (Sat & Sun) only Rwy 16R or 16L, unless another runway is nominated by Air Traffic Control;
 - (b) 2245-2300 local time (Daily) only Rwy 16R or 16L;
 - (c) 2300-0600 local time (Daily) only Rwy 16R, south of the intersection of taxiway G.

NOTE: Aircraft that receive a taxi clearance prior to the commencement of the curfew period (2300 local time) but subsequently depart after the commencement of the curfew MAY use the full length of the runway and are not required to reposition south of the intersection of Rwy 16R and taxiway G.

- (d) If an aircraft receives taxi clearance prior to 2300, it may take off from Rwy 16R even though the departure time may be within the curfew period.

e. Exemptions

These restrictions to operations do not apply to a flight under the following circumstances:

1. The aircraft is being used for or in connection with:
 - (a) a search and rescue operation;
 - (b) a medical emergency;
 - (c) a natural disaster;
2. the pilot of the aircraft has declared an in-flight emergency;

YSSY/SYD

28 MAY 10
.Eff.3.Jun.

+JEPPESEN

10-4D

SYDNEY, NSW, AUSTRALIA
- (KINGSFORD SMITH) INTL**NOISE ABATEMENT PROCEDURES**

3. the aircraft has insufficient fuel to be diverted to another airport;
4. there is an urgent need for the aircraft to land or take-off;
 - (a) to ensure the safety or security of the aircraft or any person; or
 - (b) to avoid damage to property.

f. Dispensations

Dispensation from these conditions requires the approval of the Minister for Transport. The Minister, or a delegate of the Minister, may approve operations in exceptional circumstances having regard to the guidelines for approval of dispensations.

Requests for dispensations and copies of the guidelines should be made via telephone 1300 307 288 or email to: transport.security@infrastructure.gov.au.

g. Reverse Thrust During the Curfew Period

Pilots of aircraft must use the minimum reverse thrust necessary for the safe operation of the aircraft. Pilots of aircraft shall not plan to land at Sydney if any unserviceability in the aircraft would mean that reverse thrust greater than reverse idle must be used.

If the pilot of an aircraft uses reverse thrust that is greater than idle reverse thrust, the operator must, no later than 7 days after landing, give a reverse thrust return including the following details:

1. the date and time,
2. the aircraft registration, operator and type,
3. the engine type, and
4. the reason why reverse thrust greater than at idle power was used.

The return is to be lodged with Airservices Australia at the following address:

Manager, Environment Monitoring
Airservices Australia
GPO Box 367, Canberra ACT 2601

or a facsimile sent to: (02) 6268 4201.

Notification of the use of reverse thrust greater than at idle power will not be issued to operators by Airservices.

h. Missed Approaches During the Curfew Period

If the pilot of an aircraft landing at Sydney Aerodrome during a curfew period makes a missed approach, the operator must, no later than 7 days after the attempted landing, give a missed approach return including the following details:

1. date and time;
2. the aircraft registration, operator and type;
3. the reasons for the missed approach, including the wind conditions prevailing at the time; and
4. the downwind limits for landing as specified in the aircraft's flight manual.

The return is to be lodged with Airservices Australia at the following address:

Manager, Environment Operations
Airservices Australia
GPO Box 367, Canberra ACT 2601

or a facsimile sent to: (02) 6268 4201.

Notification of missed approach incidents will not be issued to operators by Airservices.

YSSY/SYD

28 MAY 10
.Eff.3.Jun.

+JEPPESEN

10-4E

SYDNEY, NSW, AUSTRALIA
-(KINGSFORD SMITH) INTL**NOISE ABATEMENT PROCEDURES****i. Classification of Aircraft**

The operator is responsible for classifying an aircraft in accordance with ICAO Annex 16. Operators may obtain this information by writing to the Manager, Environment Monitoring, at the address shown in paragraph g.

CONCESSIONS FOR INTERNATIONAL AIRCRAFT

Operators are permitted to operate an aircraft engaged in an international operation that meets the noise level requirements of ICAO Annex 16, Volume I, Part II, Chapter 3, and that is engaged in the transport of passengers or persons generally for hire or reward to or from Sydney Aerodrome, provided that the total number of flights for all operators does not exceed the following quota;

- no more than twenty four landings between 0500 and 0600 local time in any one week.

Slot allocation to operate within the quota can be obtained from:

Airport Coordination Australia Pty. Ltd.
3/1227 Sydney International Terminal
P.O. Box 332
Mascot NSW 1460

Telephone: (02) 9313 5469

Facsimile: (02) 9313 4210

SITA: HDQACXH

E-mail: coordaus@magna.com.au

DESIGNATED FLIGHT CORRIDORS**a. Introduction**

The Air Navigation (Aerodrome Flight Corridors) Regulations regulate flight corridors used by jet aircraft at Sydney (Kingsford-Smith) Aerodrome. The Regulations contain provisions for penalties for contravention or failure to comply with the relevant designated flight corridor.

b. Use of Flight Corridors

Arriving and departing jet aircraft must fly within, and not deviate from, the appropriate designated flight corridor for the runway, except when instructed or approved otherwise by ATC for safety reasons. During curfew hours, this requirement applies to ALL aircraft.

c. Designated Flight Corridors

The Sydney Airport Jet Instrument Arrival and Departure flight corridors designated for the runways are depicted on the following pages.

JEPPESEN


19 APR 96

10-4F

NOISE.
SYDNEY, NSW, AUSTRALIA
-(KINGSFORD SMITH) INTL

NOISE ABATEMENT PROCEDURES

FLIGHT CORRIDOR A (Runway 34L-landing approach)

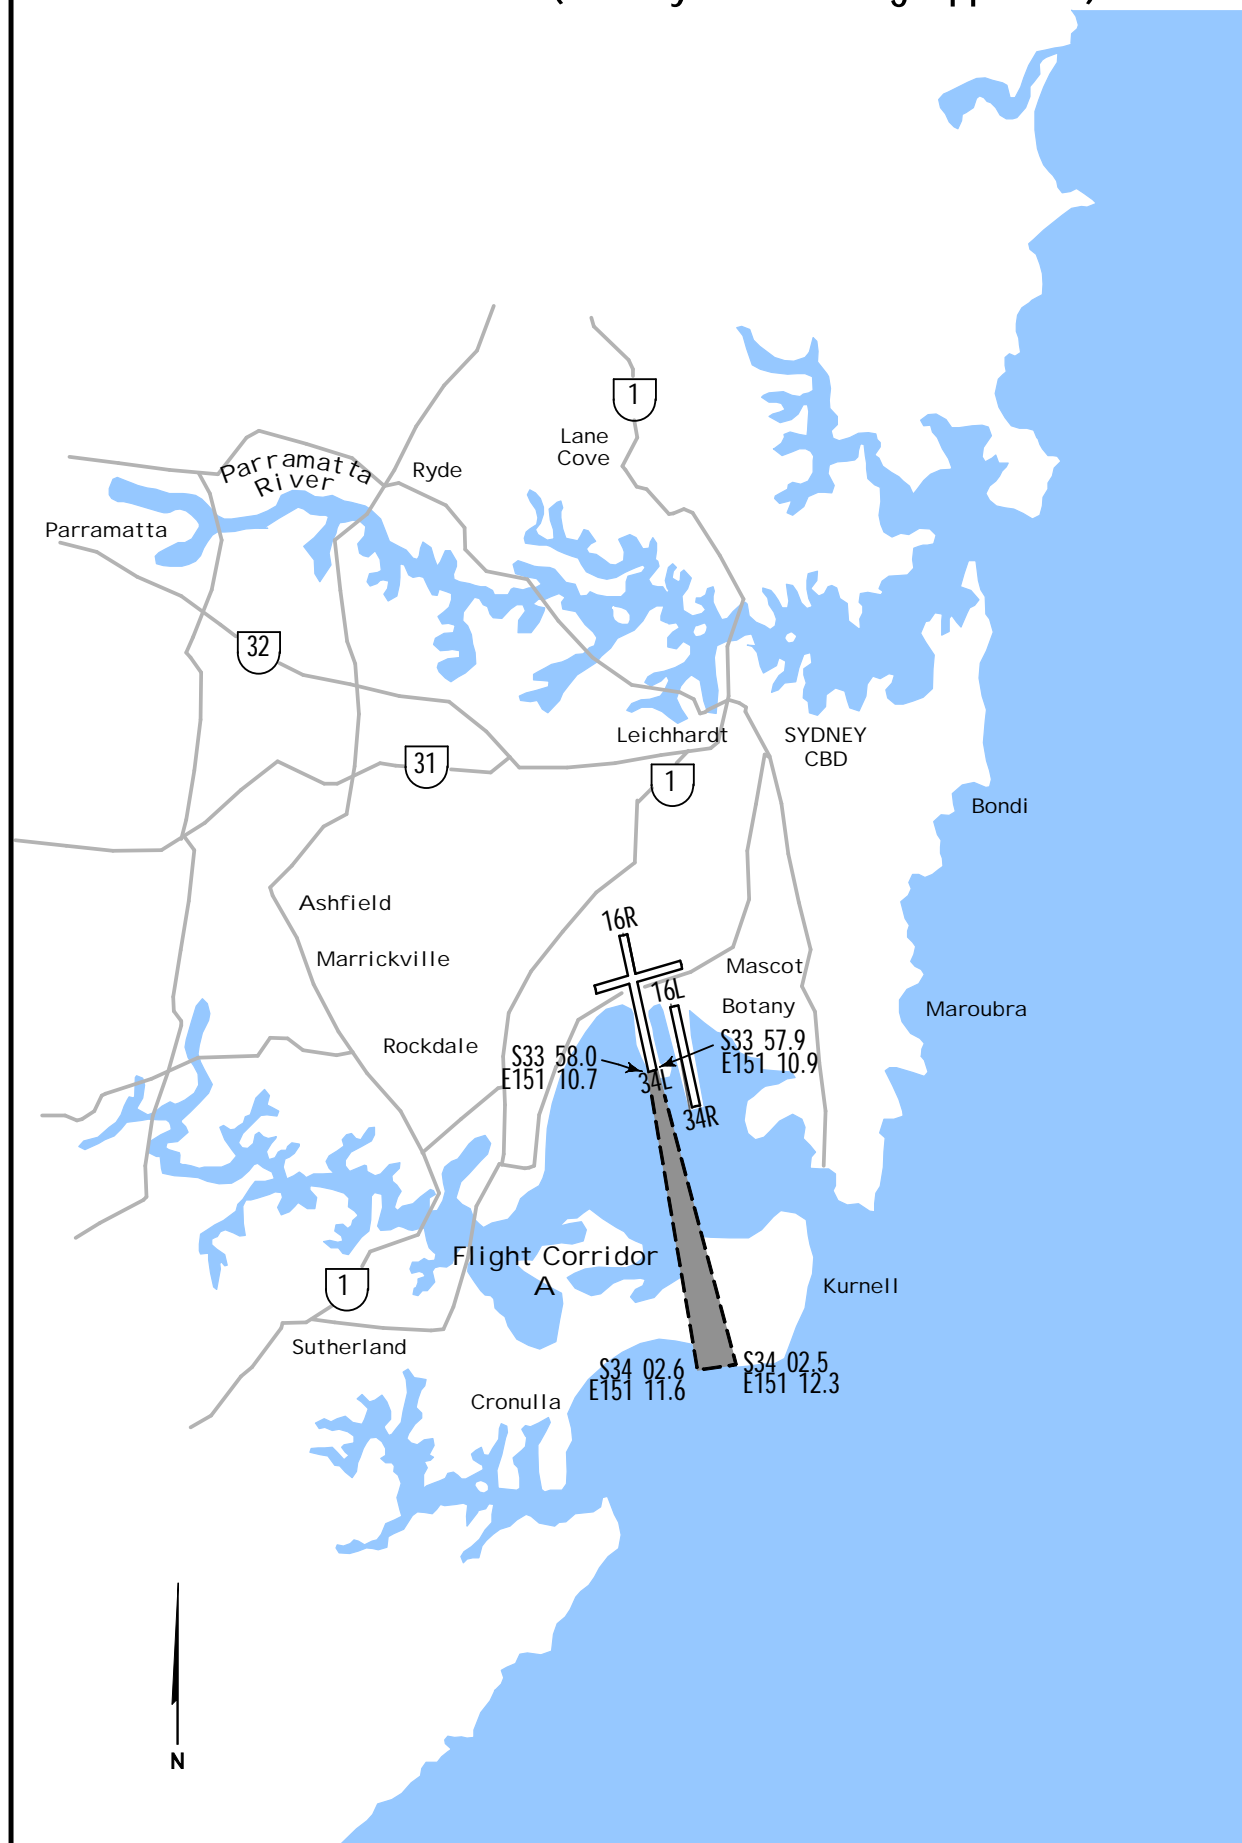

JEPPESEN


19 APR 96

(10-4G)

NOISE.
SYDNEY, NSW, AUSTRALIA
-(KINGSFORD SMITH) INTL

NOISE ABATEMENT PROCEDURES

FLIGHT CORRIDOR C (Runway 34R-landing approach)

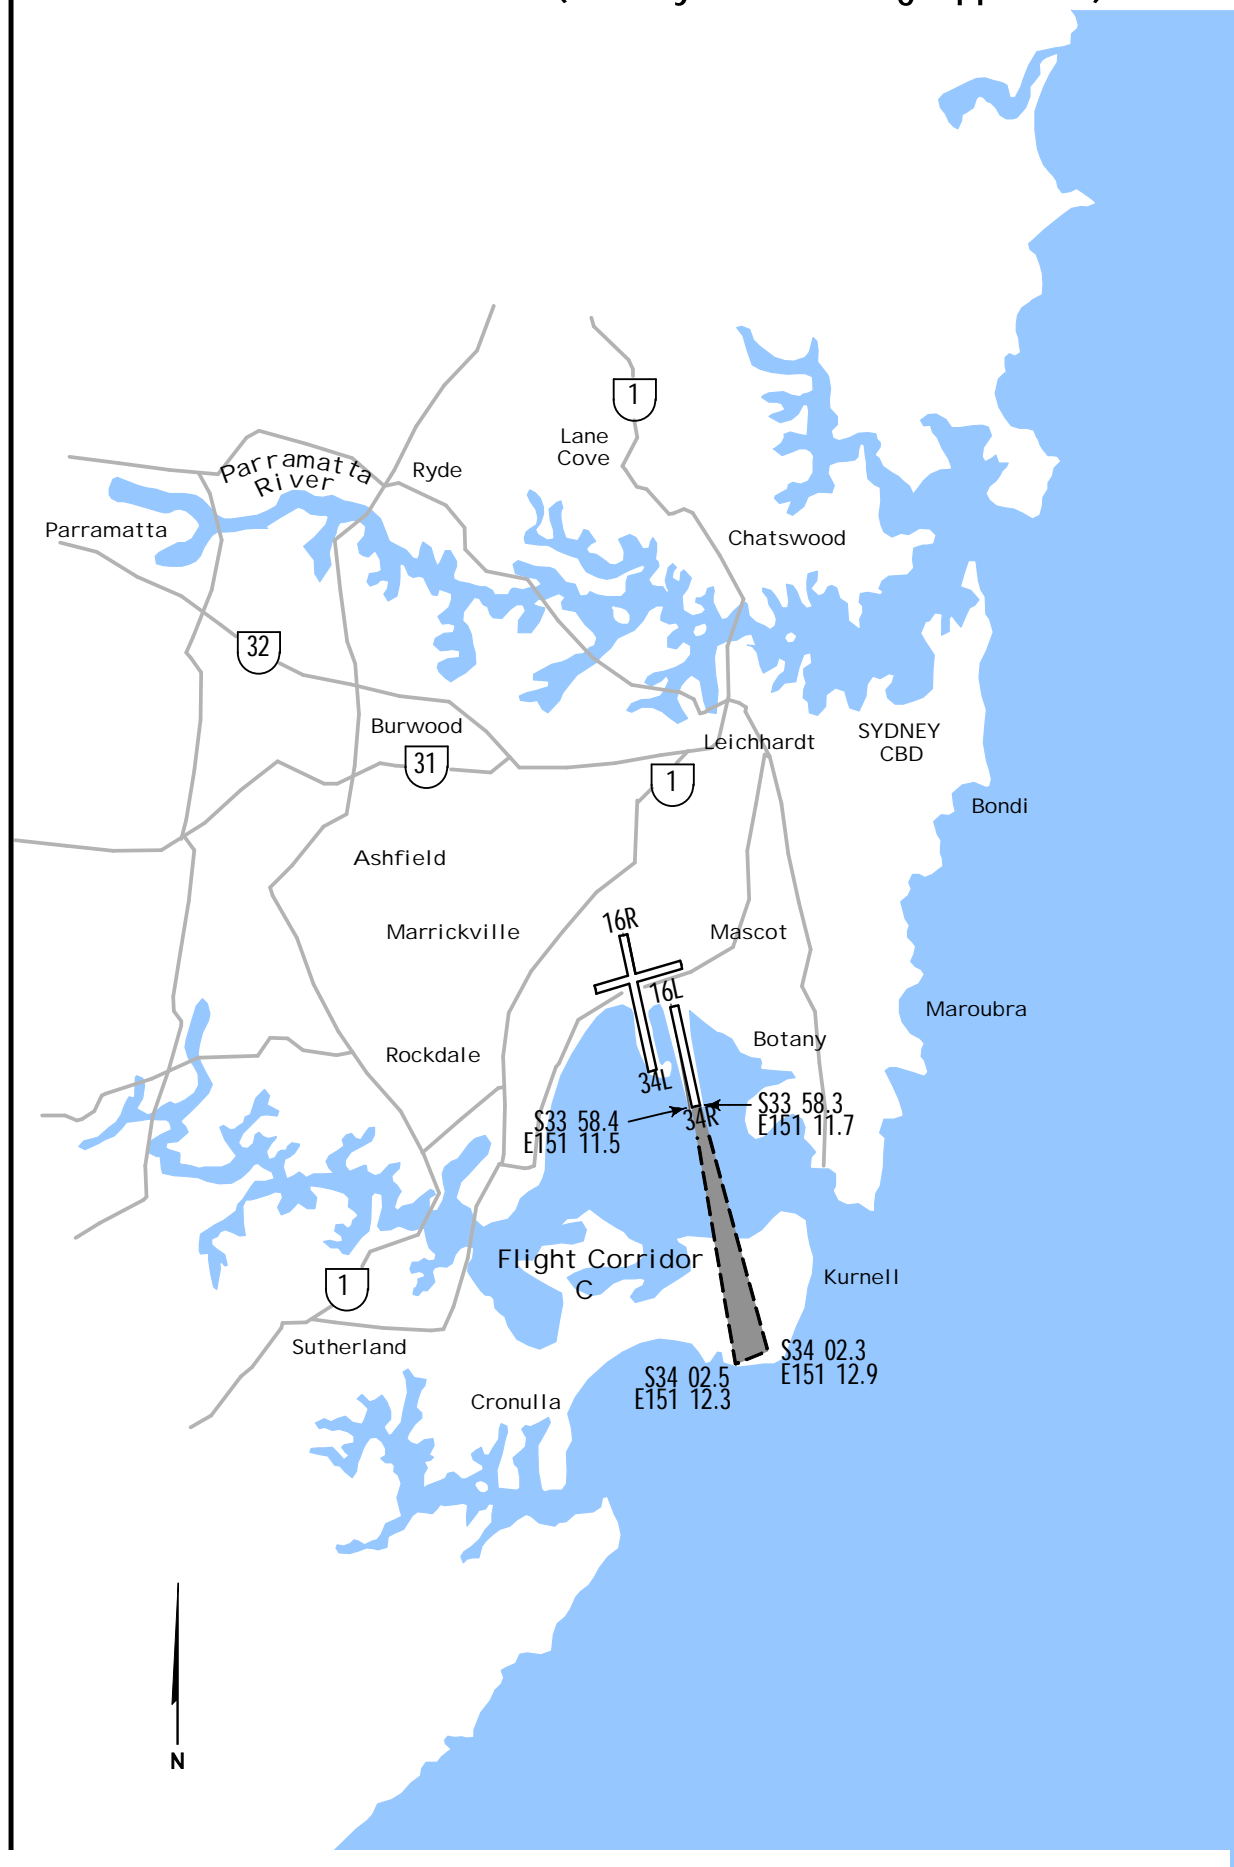

JEPPESEN


19 APR 96

(10-4H)

NOISE.
SYDNEY, NSW, AUSTRALIA
-(KINGSFORD SMITH) INTL

NOISE ABATEMENT PROCEDURES

FLIGHT CORRIDOR E
[Runway 16L-departure after take-off (IFR flight)]

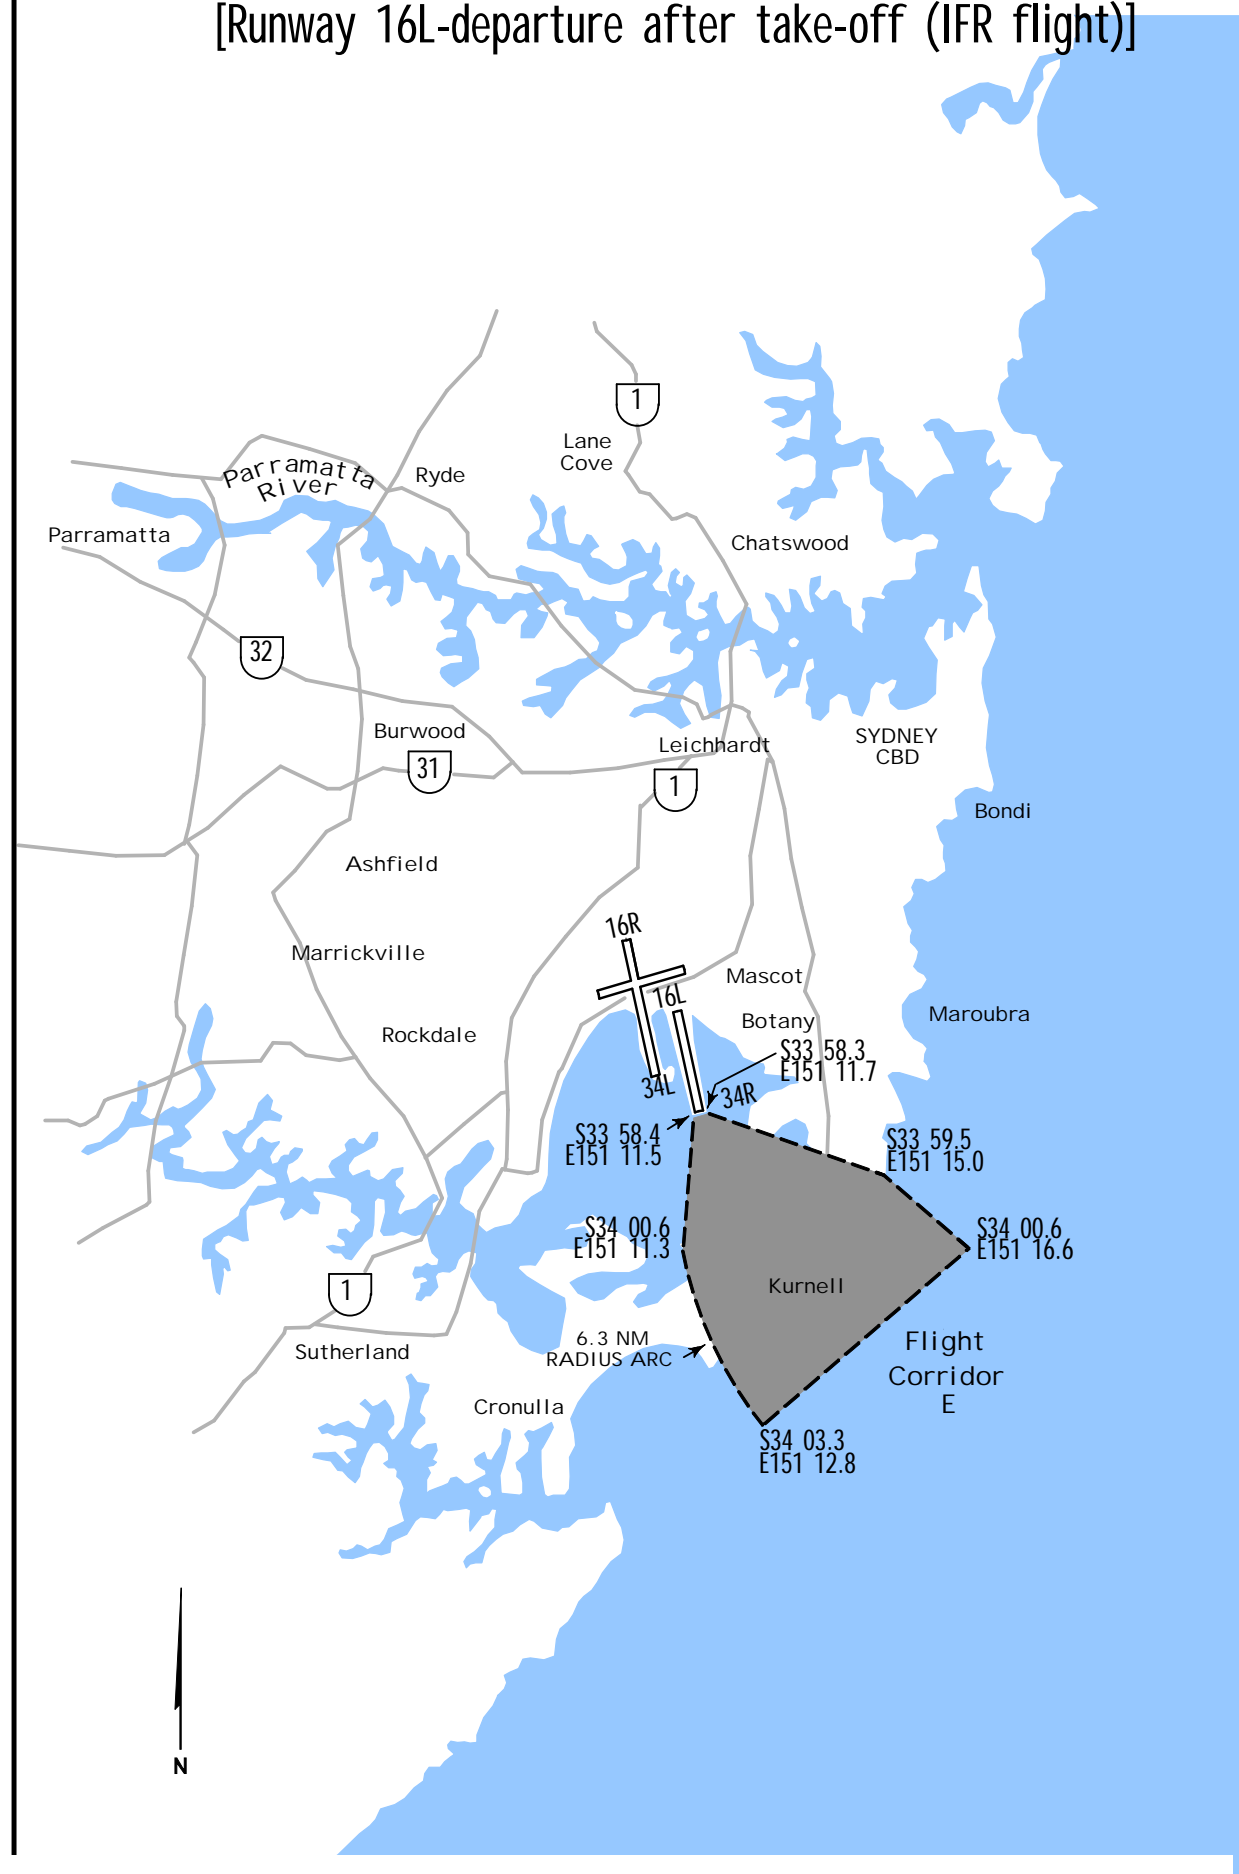

JEPPESEN


19 APR 96

(10-4J)

NOISE.
SYDNEY, NSW, AUSTRALIA
-(KINGSFORD SMITH) INTL

NOISE ABATEMENT PROCEDURES

FLIGHT CORRIDOR G [Runway 16R-departure after take-off (IFR flight)]

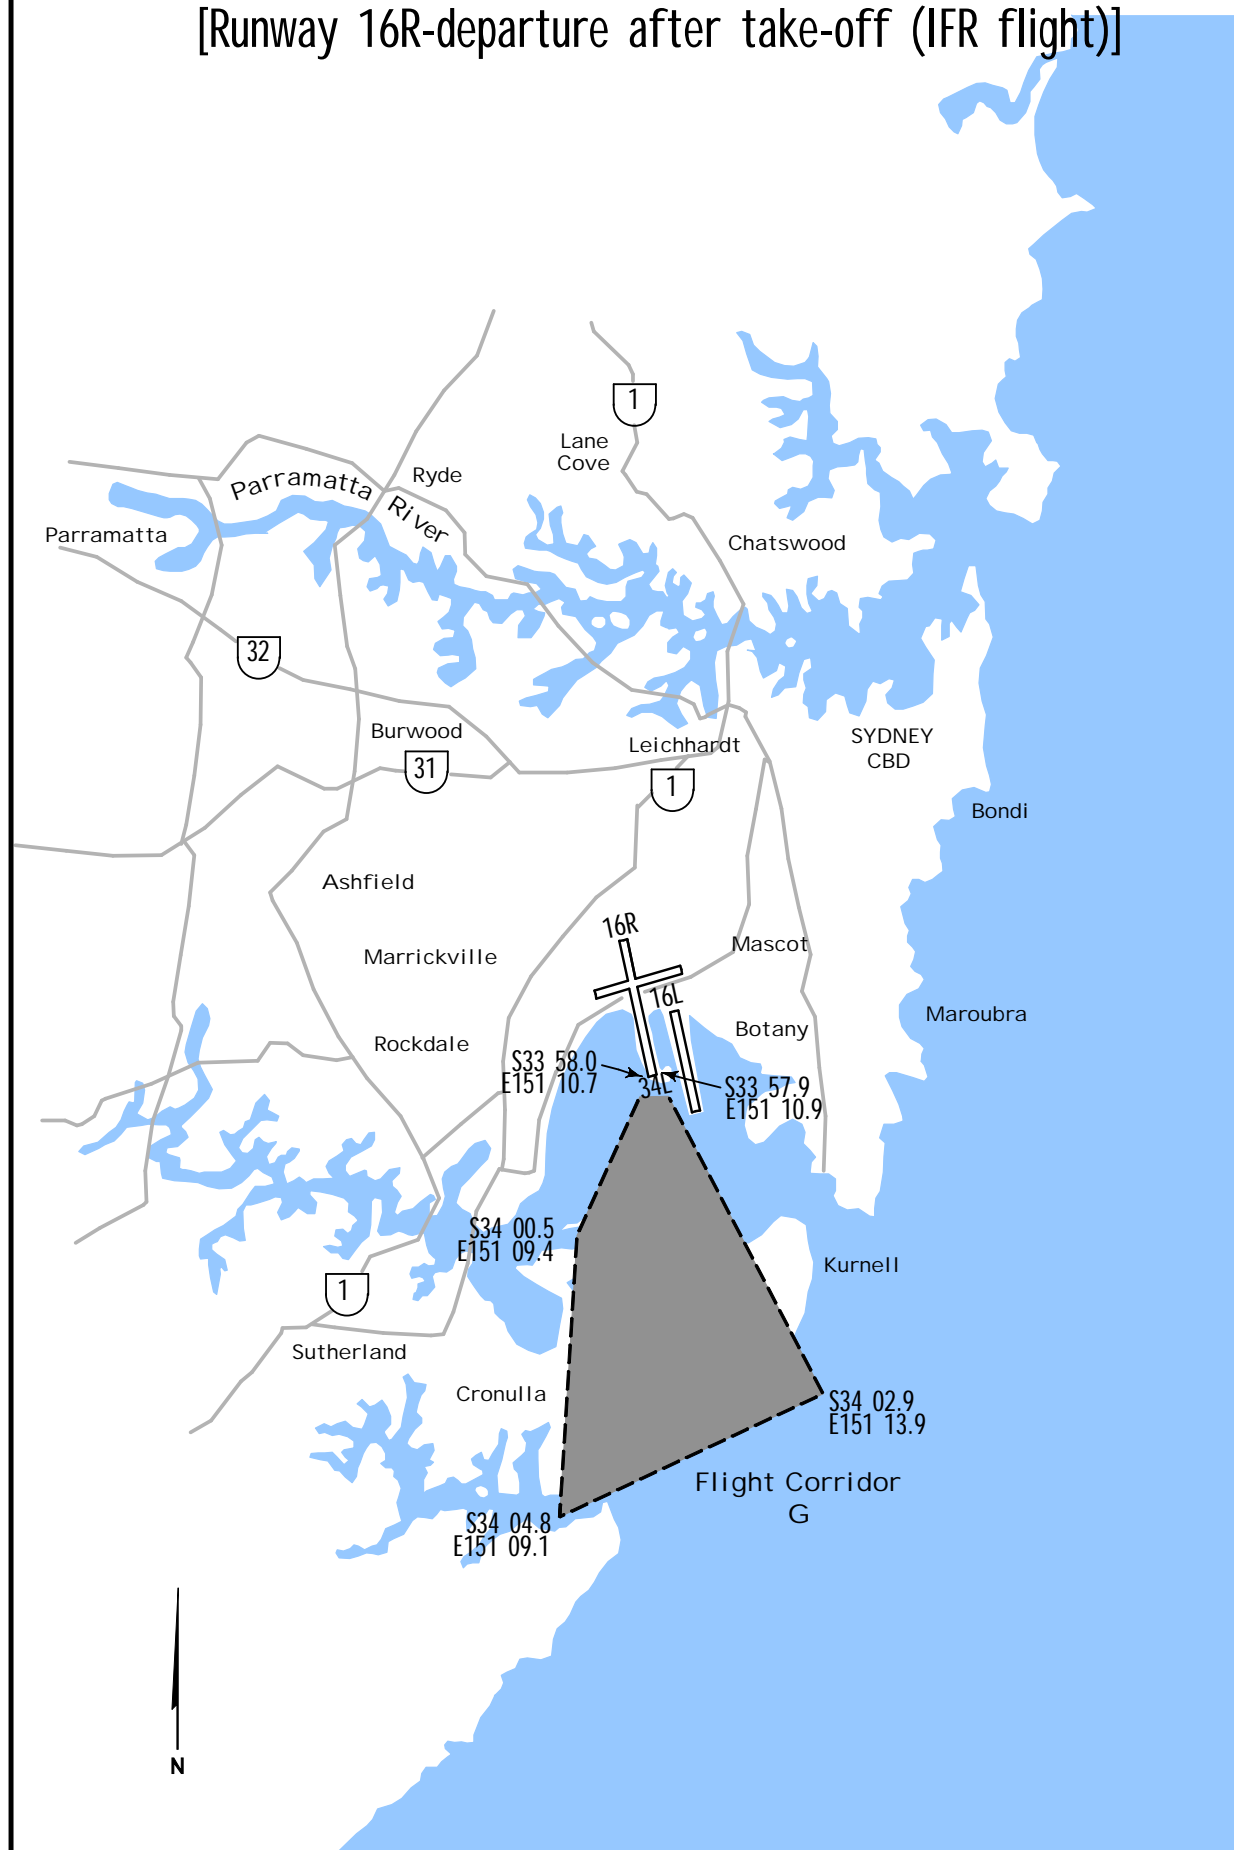

YSSY/SYD



JEPPESEN

6 JUN 14

10-6

SYDNEY, NSW, AUSTRALIA

-(KINGSFORD SMITH) INTL

STANDARD DOMESTIC TAXI ROUTES

ARRIVALS

* * ALL RUNWAY CROSSINGS REQUIRE A SPECIFIC CLEARANCE * *

B1 Apron (Bays 20-24, 83-85)

Arrival Runway	Route
16R/34L, 16L/34R**	Via B

DOM1 (Bays 1-10)
DOM1A (Bays 64-70)

Arrival Runway	Route
16R/34L, 16L/34R**	Via B, B2

Taxiway C (Bays 11-14)

Arrival Runway	Route
16R/34L, 16L/34R**	Via B, C1

Taxiway C (Bays 16-19)

Arrival Runway	Route
16R/34L, 16L/34R**	Via B, F

Taxiway C (Bays 49, 53, 55)

Arrival Runway	Route
16R/34L, 16L/34R**	Via B, B3

Taxiway C (Bays 57, 59)

Arrival Runway	Route
16R/34L, 16L/34R**	Via B, B4

DOM2 Except A330-200 (Bays 52, 54, 56, 58, 31, 33, 35, 39, 41)

Arrival Runway	Route
16R/34L, 16L/34R**	Via B, B4, C2

DOM2 (Bays 43, 45A)

Arrival Runway	Route
16R/34L, 16L/34R**	Via B, B4

For A330-200: DOM2 (Bay 39, 45)

Arrival Runway	Route
16R/34L, 16L/34R**	Via B, G, DOM2

DOM3 (Bays 32, 34, 36, 38, 40, 42, 44, 44A, F1-F6)

DOM3A (Bays F7-F12)

DOM3B (Bays F13-F16)

DOM4 (Bays 90-94)

DOM5 (All Bays)

DOM6 (Bays 98, 99)

Arrival Runway	Route
16R/34L, 16L/34R**	Via B, G

* * Supplementary Information for aircraft landing 16L/34R**

Arrival Runway	Route
16L	Via T, L
34R (Exit T2)	Via U, U1, L
34R (Exit U1, L)	Via L

Remain on TWR frequency until west of TWY S then contact Ground.

Do not proceed beyond the Taxi-Holding Position Sign without specific ATC clearance.

YSSY/SYD



6 JUN 14

10-6A

SYDNEY, NSW, AUSTRALIA

-(KINGSFORD SMITH) INTL

STANDARD DOMESTIC TAXI ROUTES

DEPARTURES

(Note: Applicable only to aircraft with wingspans of 200' (61m) or less)

* * ALL RUNWAY CROSSINGS REQUIRE A SPECIFIC CLEARANCE * *

B1 Apron (Bays 20-24, 83-85)

DEP RWY	Route	DEP RWY	Route
16R	Via B1	34L - Prop	Via B1, C, B10
16L	Via B1, C, B10	34L - Jet	Via B1, C, L, A, A6
		34R	Via B1, C, B10, S, T, T6

DOM1 (Bays 1-10)

DOM1A (Bays 64-70)

Taxiway C (Bays 11-19, 49, 53, 55, 57, 59)

DEP RWY	Route	DEP RWY	Route
16R	As instructed by ATC	34L - Prop	Via C, B10
16L	Via C, B10	34L - Jet	Via C, L, A, A6
		34R	Via C, B10, S, T, T6

DOM2 Except A330-200 (Bays 52, 54, 56, 58, 31, 33, 35, 39, 41)

DEP RWY	Route	DEP RWY	Route
16R	Via C2, B4, then as instructed by ATC	34L - Prop	Via DOM2, C, B10
16L	Via DOM2, C, B10	34L - Jet	Via DOM2, C, L, A, A6
		34R	Via DOM2, C, B10, S, T, T6

DOM2 (Bays 43, 45A)

DEP RWY	Route	DEP RWY	Route
16R	Via B4 then as instructed by ATC	34L - Prop	Via DOM2, C, B10
16L	Via DOM2, C, B10	34L - Jet	Via DOM2, C, L, A, A6
		34R	Via DOM2, C, B10, S, T, T6

For A330-200: DOM2 (Bays 39, 45)

DEP RWY	Route	DEP RWY	Route
16R	Via DOM2, G, B then as instructed by ATC	34L	Via DOM2, C, L, A, A6
16L	Via DOM2, C, B10	34R	Via DOM2, C, B10, S, T, T6

DOM3 (Bays 32, 34, 36, 38, 40, 42, 44, 44A, F1-F6)

DOM3A (Bays F7-F12)

DOM3B (Bays F13-F16)

DEP RWY	Route	DEP RWY	Route
16R	Via G then as instructed by ATC	34L - Prop	Via G, C, B10
16L	Via G, C, B10	34L - Jet	Via G, C, L, A, A6
		34R	Via G, C, B10, S, T, T6

DOM4 (Bays 90, 94)

DOM5 (All Bays)

DOM6 (Bays 98, 99)

DEP RWY	Route	DEP RWY	Route
16R	Via G then as instructed by ATC	34L - Prop	Via G, C, B10
16L	Via G, C, B10	34L - Jet	Via G, C, L, A, A6
		34R	Via G, C, B10, S, T, T6

YSSY/SYD



JEPPESEN

SYDNEY, NSW, AUSTRALIA

23 MAY 14

10-6B

.Eff.29.May. -(KINGSFORD SMITH) INTL

INDEPENDENT VISUAL APPROACH

Independent visual approaches (IVA) may be used at Sydney during parallel operations in the Rwy 16 or Rwy 34 direction. Depending on the meteorological conditions they may be initiated from a circuit or from an ILS approach once the pilot is visual.

Important instructions and advisory information for pilots:

- Report visual and/or the runway in sight as soon as possible.
- Manage speed on base leg to ensure you do not overshoot the centerline.
Standard terminal area speeds apply, 160-185 Kt 10 NM from Threshold and 150-160 Kt 5 NM from Threshold.
- Fly accurate headings when being vectored to final.
- The vector for final will not be greater than 30 degrees.
- Remain on the DIR frequency until you are established on final.
- ATC will provide surveillance or vertical separation until cleared for an independent visual approach.
- Do not pass through your assigned runway centerline.
- Other aircraft will be operating on the adjacent approach.
- Traffic information will be provided if another aircraft is within 1 NM on final.
- Flight crew must respond to any TCAS alert in accordance with the procedures in the aircraft's flight manual.
- The phraseology will include "cleared independent visual approach."
- Accurately track the extended runway centerline.
- Once you are cleared for the "independent visual approach" then the requirements of the procedure must be followed.
- If for any reason, including radio failure or radio congestion, contact cannot be established or maintained with DIR such that it prevents an instruction being issued by ATC or a vectoring request being made by the flight crew to enable intercept of the final approach course for the runway assigned, then an aircraft should initiate a turn in order to track the extended centerline of the runway assigned.
- The layout of Sydney aerodrome has shown that wake turbulence encounters are possible even though the required standard is in place.
- The ILS critical area is not protected.

YSSY/SYD



JEPPESEN

SYDNEY, NSW, AUSTRALIA


23 MAY 14

10-6C


.Eff.29.May. -(KINGSFORD SMITH) INTL

INDEPENDENT VISUAL APPROACH


Both these aircraft only
have to report visual if
on localizer

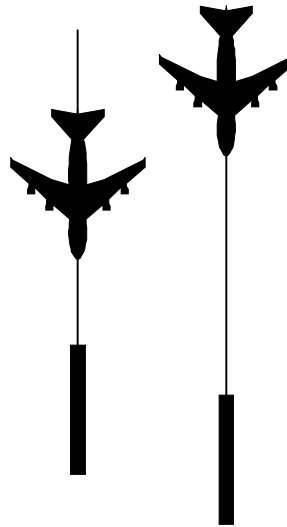



This aircraft must have
reported runway in sight.

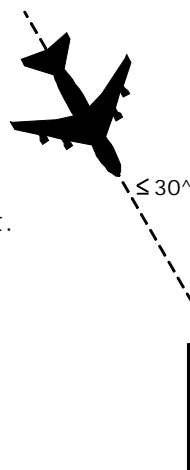

This aircraft only has
to report visual if on
localizer

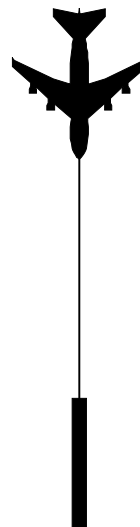


Both aircraft have to
report runway in sight.

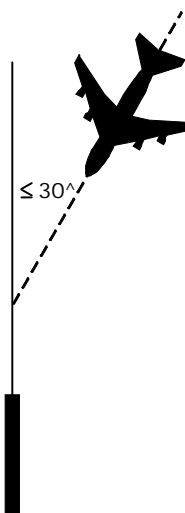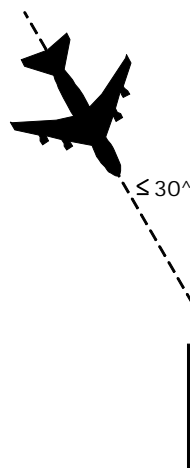

YSSY/SYP

Apt Elev 21
S33 56.8 E151 10.6

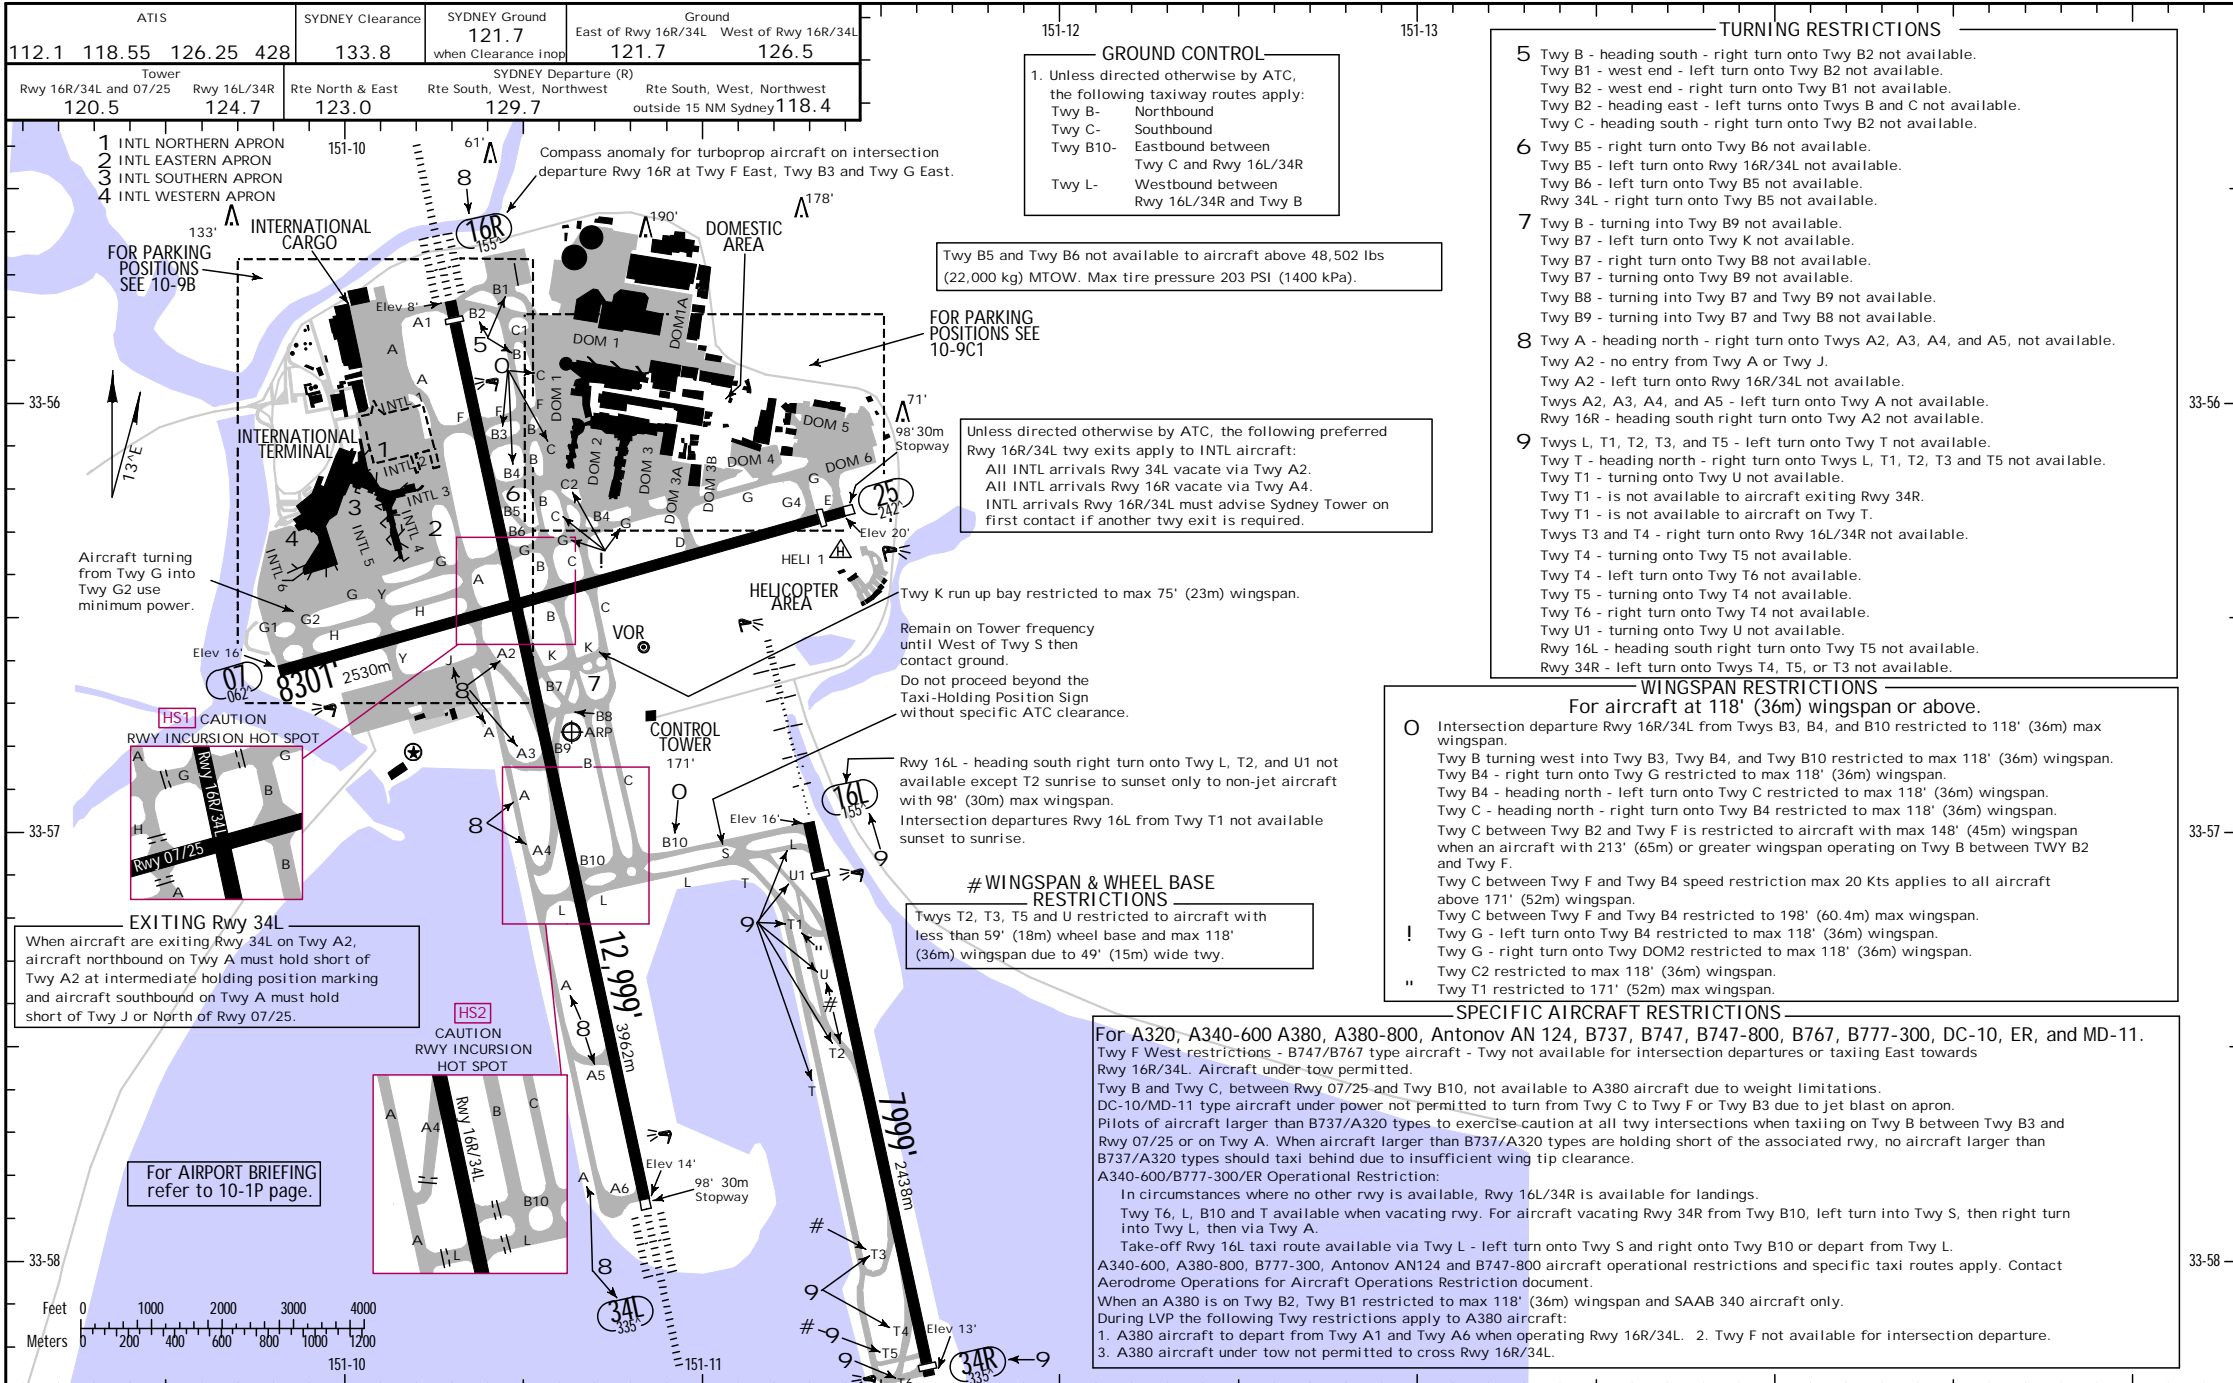

YSSY/SYD

15 AUG 14
Eff. 21. Aug. (10-9A)

JEPPESEN

SYDNEY, NSW, AUSTRALIA

-(KINGSFORD SMITH) INTL

GENERAL

CAUTION: Birds in vicinity of airport.

CAUTION required during turns as normal clearance to pavement edge may not be available.

Circling approach to Rwy 16L/34R at night is not permitted.

Taxiway intersection markings are not provided at all taxiway intersections. Where provided, taxiway intersection markings are not lit.

Aircraft under tow, when crossing a runway in use, have equal priority to other aircraft.

All aircraft must provide their parked position/gate number to ATC on acknowledgement of airways clearance.

Jet aircraft under power not permitted to make 180° turns on taxiways and aprons.

One engine only permitted to start prior to push back (rear mounted engines, not permitted to start on aprons) until aircraft is located at tow bar disconnect point. Aircraft to use minimum power whilst entering and exiting aprons.

Pilots of four engine aircraft are to exercise caution when applying power on outboard engines while taxiing.

Access to corporate aviation apron restricted to 48,502 lbs (22,000 kg) MTOW/98' (30m) maximum wingspan and below. Aircraft in excess of this are to contact Aerodrome operations prior to arrival for parking arrangements. Maximum 112' (34m) wingspan available to Bay 96 only.

Ground Based Augmentation System (GBAS) available for CAT I precision approaches to all runways.

Ground Based Augmentation System (GBAS) available for use by operators and pilots authorized to conduct GBAS Landing System by the National Aviation Authority of the State of registration of the aircraft.

ADDITIONAL RUNWAY INFORMATION

RWY			USABLE LENGTHS		TAKE-OFF	WIDTH
			Threshold	Glide Slope		
07	1 HIRL 1 REIL 1 PAPI (angle 3.0°, MEHT 64°)	RVR		7240' 2207m		148' 45m
	grooved					
25	1 HIRL 1 PAPI (angle 3.0°, MEHT 64°)	RVR	7969' 2429m	7097' 2163m		

1 Standby power available.

16R	HIRL REIL CL ALSF-II TDZ 3 PAPI grooved RVR	12,720' 3877m	11,765' 3586m		148' 45m
2 34L			12,034' 3668m		

2 Standby power available.

3 (angle 3.0°, MEHT 64°)

16L	4 HIRL 4 HIALS 4 PAPI (angle 3.0°, MEHT 53°)	RVR	7241' 2207m	6217' 1895m	148' 45m
	grooved				
34R	4 HIRL 4 REIL 4 PAPI (angle 3.0°, MEHT 53°)	RVR	7874' 2400m	6851' 2088m	

4 Standby power available.

AIRPORT EFFICIENCY PROCEDURES

1. DEPARTING AIRCRAFT

1.1 Whenever possible, complete cockpit checks prior to line-up and keep any checks requiring completion on the runway to a minimum.

1.2 On receipt of line up clearance, taxi into position as soon as possible. Do not backtrack.

1.3 Pilots and ATC should endeavor to keep aircraft moving and avoid a standing start.

1.4 Commence the take off roll as soon as take off clearance is issued.

2. ARRIVING AIRCRAFT

2.1 To ensure minimum runway occupancy time and support optimum spacing on final, whenever operational conditions permit, expect to vacate the runway via the exit taxiways specified in the table below.

2.2 Plan a predictable and efficient exit from the runway and if an exit other than the preferred is required, advise tower on first contact.

2.3 Landing Exit Distance (LED), the distance from the threshold to the furthest edge of the exit taxiway, are provided to assist planning.

RWY	AIRCRAFT TYPE	Preferred TWY Exits	LED
07	Non jet	B	4111' 1253m
	Jet except A388, B748, A346, B773	D	6119' 1865m
	A388, B748, A346, B773	G4	7897' 2407m
16L	Non jet	T3	5272' 1607m
	Jet	T4	6444' 1964m
16R	Domestic Terminal - All aircraft types	B7	5079' 1548m
	International Terminal - All aircraft types	A4	7310' 2228m
25	Non jet	B	3934' 1199m
	Jet	Y	6404' 1952m
34L	Domestic Terminal - All aircraft types	B9	6522' 1988m
	International Terminal - All aircraft types	A2	7169' 2185m
34R	Non jet	T2	4498' 1371m
	Jet	U1	6430' 1960m

NOTE: Preferred exit taxiway procedures do not apply during Sydney Airport Curfew hours.

1 TAKE-OFF

	All Rwys	
	STANDARD	Other
	With RL & either CL or RCLM	
1 Eng	300' - 2.0 km	
2, 3 & 4 Eng	Single pilot acft without auto-feathering. Acft not above 5700 kg & not capable of Engine out climb gradient of 1.9%. 300' - 2.0 km	
2, 3 & 4 Eng	550m	800m

1 For CASA Approved Operators, all rwys are capable of supporting take-offs with not less than RVR/RV350m.

	FOR FILING AS ALTERNATE		
	2 Special	GLS Rwy 07 GLS Rwy 16L GLS Rwy 16R	GLS Rwy 25 GLS Rwy 34L GLS Rwy 34R
A	700' - 2.5 km	1479' - 7.0 km	1189' - 4.4 km
B			1479' - 6.0 km
C			1479' - 7.0 km
D			1479' - 7.0 km

/DME procedures except LOC/DME Rwy 16L, LOC/DME 16R,


YSSY/SYD

29 AUG 14

(10-9B)

SYDNEY, NSW, AUSTRALIA

-(KINGSFORD SMITH) INTL

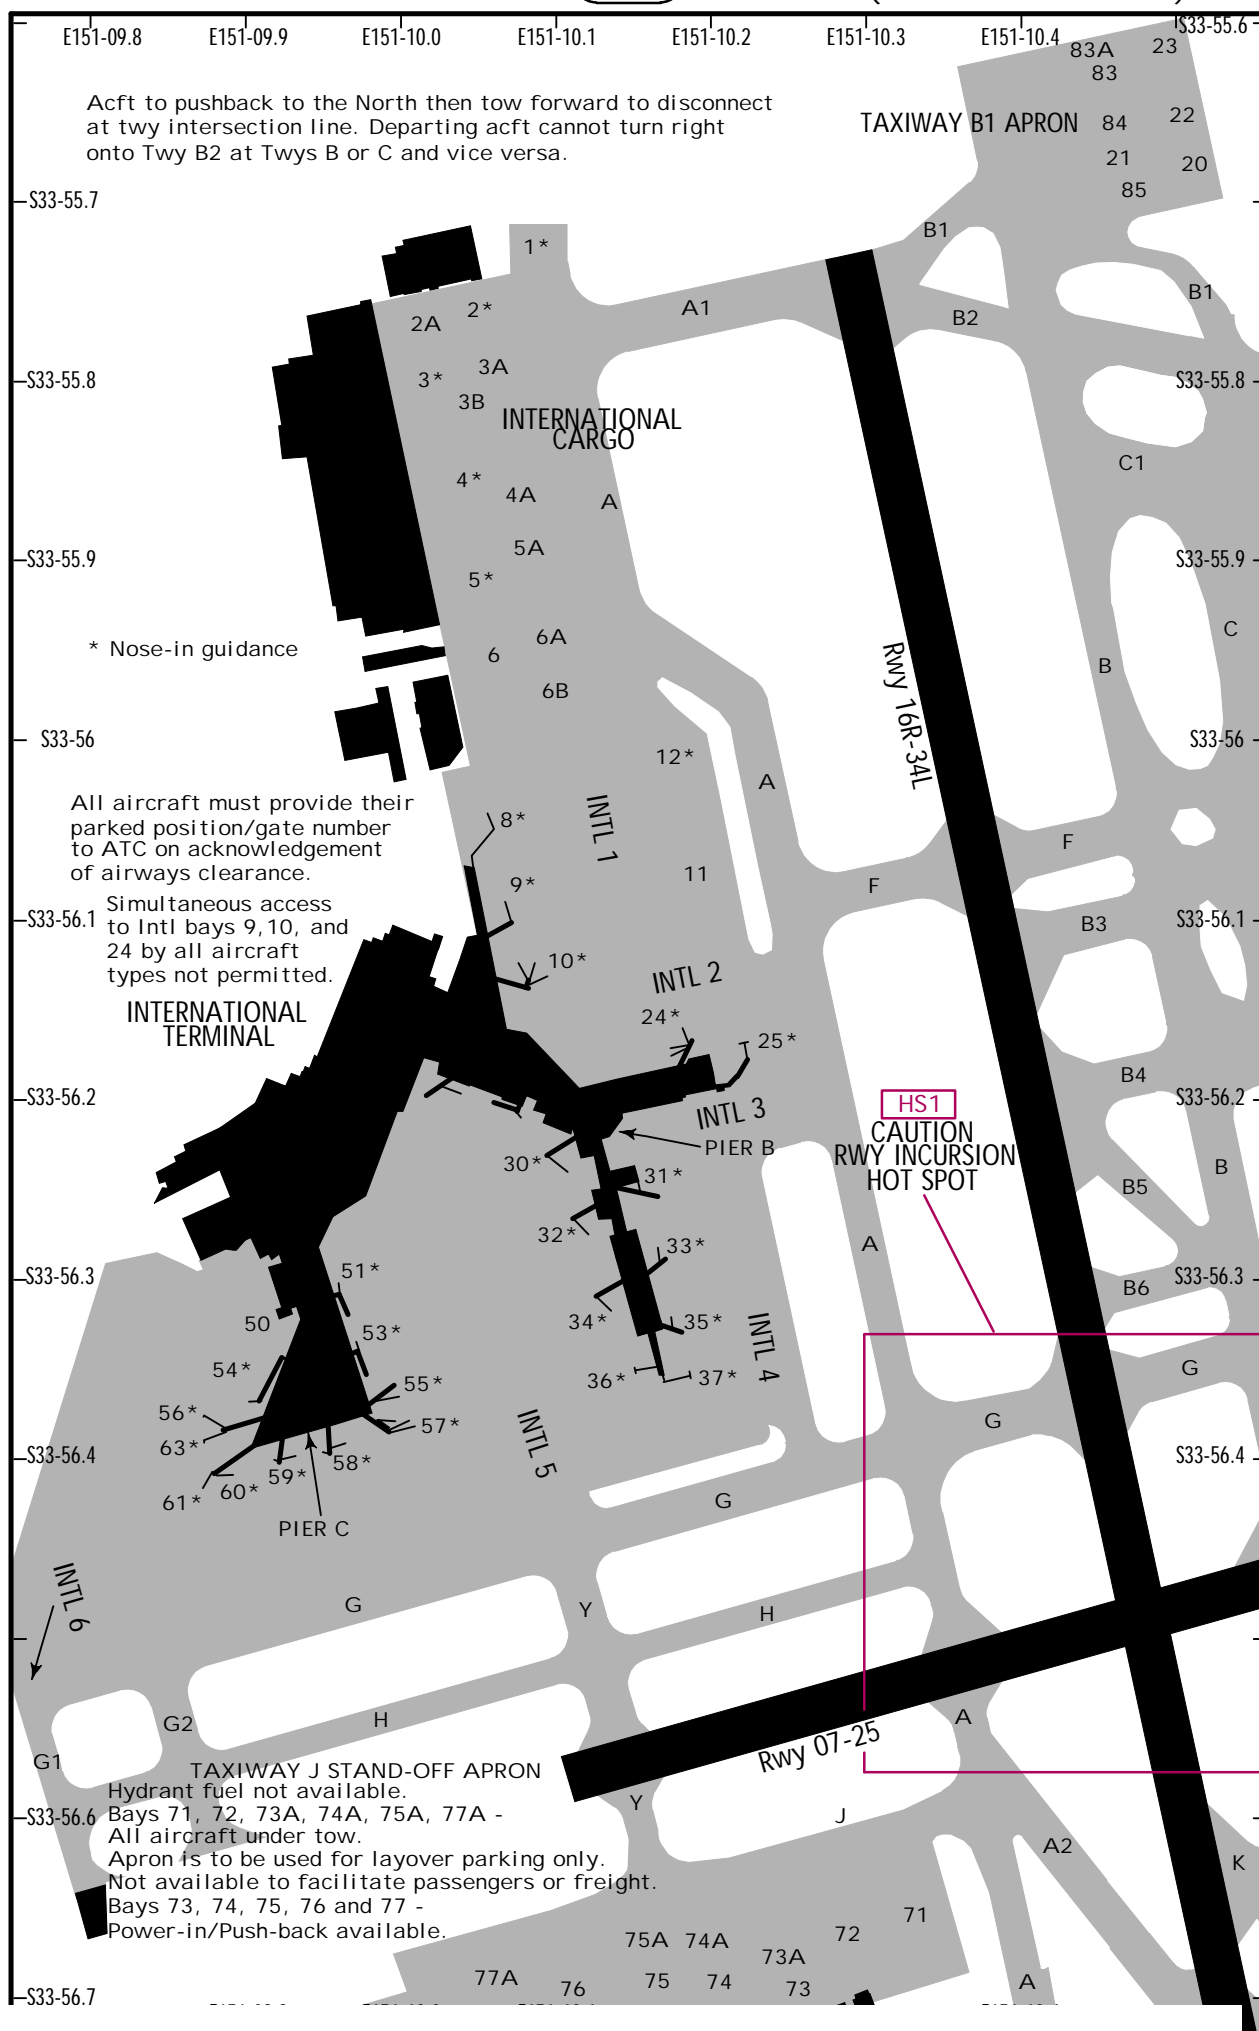

YSSY/SYD



SYDNEY, NSW, AUSTRALIA

29 AUG 14

(10-9C)

-(KINGSFORD SMITH) INTL

INTERNATIONAL APRON PARKING BAY INFORMATION

BAY No.	COORDINATES	ELEV (ft)	CAPACITY	NOSE-IN GUIDANCE
1	S33 55.7 E151 10.1	9	B788	SAFEGATE DGS
2	S33 55.8 E151 10.0	10	B744	APIS
2A	S33 55.8 E151 10.1	10	BAE146	MARSHALLED
3	S33 55.8 E151 10.1	11	B744	APIS
3A	S33 55.8 E151 10.1	11	AN-124	MARSHALLED
3B	S33 55.8 E151 10.1	9	BAE146	MARSHALLED
4	S33 55.9 E151 10.1	11	B744	APIS
4A	S33 56.4 E151 10.1	9	BAE146	MARSHALLED
5	S33 55.9 E151 10.1	11	B744	SAFEGATE DGS
5A	S33 55.9 E151 10.1	11	A388	MARSHALLED
6	S33 56.0 E151 10.1	11	A388	SAFEGATE DGS
6A	S33 56.0 E151 10.1	11	B744	MARSHALLED
6B	S33 56.0 E151 10.1	11	B737/A320	MARSHALLED
8	S33 56.1 E151 10.1	11	A388	SAFEGATE DGS
9	S33 56.1 E151 10.1	11	A388	SAFEGATE DGS
10	S33 56.1 E151 10.1	11	A388	SAFEGATE DGS
11	S33 56.1 E151 10.2	11	B763	MARSHALLED
12	S33 56.0 E151 10.2	11	A320	APIS
20, 21	S33 55.7 E151 10.5	7	BAE146	MARSHALLED
22	S33 55.7 E151 10.5	7	DHC8-300	MARSHALLED
23	S33 55.7 E151 10.5	7	BAE146	MARSHALLED
24	S33 56.2 E151 10.2	11	A388	SAFEGATE DGS
25	S33 56.2 E151 10.2	11	B744	SAFEGATE DGS
30	S33 56.2 E151 10.1	11	B744	SAFEGATE DGS
31	S33 56.3 E151 10.1	10	B744	SAFEGATE DGS
32	S33 56.3 E151 10.1	11	B744	SAFEGATE DGS
33	S33 56.3 E151 10.2	10	B744	SAFEGATE DGS
34	S33 56.3 E151 10.1	11	B744	SAFEGATE DGS
35	S33 56.3 E151 10.2	11	B744	SAFEGATE DGS
36	S33 56.4 E151 10.1	11	B744	SAFEGATE DGS
37	S33 56.4 E151 10.2	11	B744	SAFEGATE DGS
50	S33 56.3 E151 09.9	11	B738	MARSHALLED
51	S33 56.3 E151 09.9	11	B744	SAFEGATE DGS
53	S33 56.3 E151 10.0	11	B744	SAFEGATE DGS
54	S33 56.3 E151 09.9	11	B772	SAFEGATE DGS
55	S33 56.4 E151 10.0	11	B737/A320	SAFEGATE DGS
56	S33 56.4 E151 09.9	11	B744	SAFEGATE DGS
57	S33 56.4 E151 10.0	11	A388	SAFEGATE DGS
58	S33 56.4 E151 10.0	11	B744	SAFEGATE DGS
59, 60	S33 56.4 E151 09.9	11	B744	SAFEGATE DGS
61	S33 56.4 E151 09.8	11	A388	SAFEGATE DGS
63	S33 56.4 E151 09.8	11	B737/A320	SAFEGATE DGS
71	S33 56.7 E151 10.3	16	B744	MARSHALLED
72	S33 56.7 E151 10.3	15	A388	MARSHALLED
73	S33 56.7 E151 10.3	15	B744	SAFEGATE DGS
73A	S33 56.7 E151 10.2	15	A388	MARSHALLED
74	S33 56.7 E151 10.2	15	B744	SAFEGATE DGS
74A	S33 56.7 E151 10.2	15	A388	MARSHALLED
75	S33 56.8 E151 10.2	15	B744	SAFEGATE DGS
75A	S33 56.7 E151 10.1	15	A388	MARSHALLED
76, 77	S33 56.8 E151 10.1	15	B744	SAFEGATE DGS
77A	S33 56.7 E151 10.0	15	A388	MARSHALLED
83	S33 55.6 E151 10.5	7	B744	MARSHALLED
83A	S33 55.6 E151 10.5	7	B738	MARSHALLED
84, 85	S33 55.7 E151 10.5	7	B744	MARSHALLED

NOTE:

YSSY/SYD

29 AUG 14 **JEPPESEN**
10-9C-1

SYDNEY, NSW, AUSTRALIA
-(KINGSFORD SMITH) INTL



YSSY/SYD

29 AUG 14

JEPPESEN

10-9C-2

SYDNEY, NSW, AUSTRALIA

-(KINGSFORD SMITH) INTL

DOMESTIC APRON PARKING BAY INFORMATION

BAY No.	COORDINATES	ELEV(ft)	CAPACITY	NOSE IN GUIDANCE
ACCESS FROM TAXILANE DOM1				
1	S33 55.9 E151 10.9	8	B738	SAFEGATE DGS
2 thru 4	S33 55.9 E151 10.8	7	B763	SAFEGATE DGS
5, 6	S33 55.9 E151 10.7	7	B763	SAFEGATE DGS
7	S33 55.9 E151 10.7	7	B738	SAFEGATE DGS
7A	S33 55.9 E151 10.7	9	B744	SAFEGATE DGS
8	S33 55.9 E151 10.6	7	B738	SAFEGATE DGS
9	S33 55.9 E151 10.6	6	B738	SAFEGATE DGS
10	S33 55.9 E151 10.6	6	B744	SAFEGATE DGS
11	S33 55.9 E151 10.6	8	A333	SAFEGATE DGS
ACCESS FROM TAXILANE DOM1A				
64	S33 55.8 E151 11.0	9	DH8D	MARSHALLED
65, 66	S33 55.8 E151 11.0	10	DH8D	MARSHALLED
67	S33 55.8 E151 10.9	10	DH8D	MARSHALLED
68, 69	S33 55.9 E151 10.9	10	DH8D	MARSHALLED
70	S33 55.9 E151 11.0	10	DH8D	MARSHALLED
ACCESS FROM TWY C				
12	S33 55.9 E151 10.6	8	B738	SAFEGATE DGS
13	S33 55.9 E151 10.6	8	A333	SAFEGATE DGS
14	S33 55.9 E151 10.6	8	B738	SAFEGATE DGS
16	S33 56.0 E151 10.6	6	Q400	MARSHALLED
17	S33 56.0 E151 10.6	6	B763	SAFEGATE DGS
17A	S33 56.0 E151 10.6	6	Q400	MARSHALLED
17B	S33 56.0 E151 10.6	5	Q400	MARSHALLED
18	S33 56.0 E151 10.7	7	Q400	MARSHALLED
18A	S33 56.0 E151 10.7	7	DHC8-300	MARSHALLED
19	S33 56.0 E151 10.7	7	Q400	MARSHALLED
19A, 19B	S33 56.0 E151 10.6	6	Q400	MARSHALLED
49	S33 56.0 E151 10.6	8	B763	CENTERLINE + SIDEMARKER
49A	S33 56.0 E151 10.6	8	B743	CENTERLINE + SIDEMARKER
49B	S33 56.0 E151 10.6	8	DHC8-300	MARSHALLED
53	S33 56.1 E151 10.6	7	B763	APIS
53B	S33 56.1 E151 10.6	8	DHC8-300	MARSHALLED
55	S33 56.1 E151 10.6	8	B763	APIS
55B	S33 56.1 E151 10.6	8	DHC8-300	MARSHALLED
57	S33 56.1 E151 10.6	8	A320	SAFEGATE DGS
57A, 57B	S33 56.1 E151 10.6	8	DHC8-300	---
59	S33 56.2 E151 10.6	7	A320	MARSHALLED
ACCESS FROM TAXILANE DOM2				
31	S33 56.1 E151 10.8	6	B738	SAFEGATE DGS
31A	S33 56.1 E151 10.8	5	ATR72	MARSHALLED
31B	S33 56.1 E151 10.7	5	DHC8-300	MARSHALLED
33	S33 56.1 E151 10.8	6	B738	APIS
33A	S33 56.1 E151 10.7	5	ATR72	MARSHALLED
33B	S33 56.1 E151 10.7	4	DHC8-300	MARSHALLED
35	S33 56.1 E151 10.8	6	B738	SAFEGATE DGS
35A	S33 56.1 E151 10.7	5	DHC8-300	MARSHALLED
39	S33 56.2 E151 10.8	6	A332	SAFEGATE DGS
39A	S33 56.2 E151 10.7	6	ATR72	MARSHALLED
39B	S33 56.2 E151 10.7	6	DHC8-300	MARSHALLED
41	S33 56.2 E151 10.7	7	B738	SAFEGATE DGS
43	S33 56.2 E151 10.7	7	B738	SAFEGATE DGS
45	S33 56.2 E151 10.8	7	A332	SAFEGATE DGS
52	S33 56.1 E151 10.7	7	B738	APIS
52A, 54A	S33 56.1 E151 10.7	6	DHC8-300	MARSHALLED
54, 56	S33 56.1 E151 10.7	7	B738	SAFEGATE DGS
58	S33 56.2 E151 10.7	7	B738	MARSHALLED

NOTES

YSSY/SYD


JEPPESSEN
 29 AUG 14 (10-9C-3)

SYDNEY, NSW, AUSTRALIA

-(KINGSFORD SMITH) INTL

DOMESTIC APRON PARKING BAY INFORMATION

BAY No.	COORDINATES	ELEV (ft)	CAPACITY	NOSE IN GUIDANCE
45A	ACCESS FROM TAXIWAY B4 S33 56.2 E151 10.8	7	B738	SAFEGATE DGS
44	ACCESS FROM TAXIWAY G S33 56.2 E151 10.8	8	A332	SAFEGATE DGS
44A	S33 56.2 E151 10.8	8	A320	SAFEGATE DGS
32	ACCESS FROM TAXILANE DOM3 S33 56.1 E151 10.8	8	B738	SAFEGATE DGS
32A	S33 56.1 E151 10.8	8	SAAB 340B+	MARSHALLED
34	S33 56.1 E151 10.8	8	A320	SAFEGATE DGS
34A	S33 56.1 E151 10.8	8	SAAB 340B+	MARSHALLED
36	S33 56.1 E151 10.8	7	A320	SAFEGATE DGS
38	S33 56.2 E151 10.8	7	A320	SAFEGATE DGS
40	S33 56.2 E151 10.8	7	A332	SAFEGATE DGS
42	S33 56.2 E151 10.8	8	A320	SAFEGATE DGS
F1, F2	S33 56.1 E151 10.9	11	BAE J41	MARSHALLED
F3	S33 56.1 E151 10.9	11	SAAB 340+	MARSHALLED
F3A	S33 56.1 E151 10.9	11	DHC8-300	MARSHALLED
F4	S33 56.2 E151 10.9	12	B738	MARSHALLED
F4A	S33 56.2 E151 10.9	12	SAAB 340+	MARSHALLED
F4B, F5A/B	S33 56.2 E151 10.9	11	SAAB 340+	MARSHALLED
F5	S33 56.2 E151 10.9	11	B738	MARSHALLED
F6	S33 56.2 E151 10.9	10	B738	MARSHALLED
F6A/B	S33 56.2 E151 10.9	10	SAAB 340+	MARSHALLED
F7	ACCESS FROM TAXILANE DOM3A S33 56.2 E151 10.9	10	DHC8-300	MARSHALLED
F7A	S33 56.2 E151 10.9	10	SAAB 340+	MARSHALLED
F8	S33 56.2 E151 10.9	12	DHC8-300	MARSHALLED
F9	S33 56.2 E151 10.9	14	SAAB 340+	MARSHALLED
F10	S33 56.2 E151 11.0	14	SAAB 340+	MARSHALLED
F11	S33 56.2 E151 11.0	13	SAAB 340+	MARSHALLED
F12	S33 56.2 E151 11.0	11	SAAB 340+	MARSHALLED
F13, F13A	ACCESS FROM TAXILANE DOM3B S33 56.2 E151 11.0	14	DHC8-300	MARSHALLED
F13B	S33 56.2 E151 11.0	14	ATR72	MARSHALLED
F14	S33 56.2 E151 11.0	14	SAAB 340+	MARSHALLED
F15, F15A	S33 56.2 E151 11.0	14	DHC8-300	MARSHALLED
F15B	S33 56.2 E151 11.0	14	SAAB 340+	MARSHALLED
F15C	S33 56.2 E151 11.1	14	ATR72	MARSHALLED
F16, F16A	S33 56.2 E151 11.1	14	DHC8-300	MARSHALLED
90, 90B, 91	ACCESS FROM TAXILANE DOM4 S33 56.1 E151 11.1	17	DHC8-300	MARSHALLED
90C	S33 56.1 E151 11.1	17	B747-400	MARSHALLED
91B, 92	S33 56.1 E151 11.1	17	DHC8-300	MARSHALLED
90A, 91A	S33 56.1 E151 11.1	18	B737	MARSHALLED
92A	S33 56.1 E151 11.1	17	B737	MARSHALLED
92B	S33 56.1 E151 11.1	16	DHC8-300	MARSHALLED
93	S33 56.1 E151 11.2	17	B737	MARSHALLED
93A	S33 56.1 E151 11.2	17	B747-400	MARSHALLED
93B, 93C	S33 56.1 E151 11.2	17	SAAB 340+	MARSHALLED
94, 94B	S33 56.1 E151 11.2	16	DHC8-300	MARSHALLED

NOTE

YSSY/SYD


JEPPESEN
 29 AUG 14 (10-9C-4)

SYDNEY, NSW, AUSTRALIA

-(KINGSFORD SMITH) INTL

DOMESTIC APRON PARKING BAY INFORMATION

BAY No.	COORDINATES	ELEV (ft)	CAPACITY	NOSE IN GUIDANCE
ACCESS FROM TAXILANE DOM5				
96	S33 56.1 E151 11.3		30m wingspan	MARSHALLED
96A	S33 56.1 E151 11.3		30m wingspan	MARSHALLED
96B	S33 56.1 E151 11.3		30m wingspan	MARSHALLED
96C	S33 56.1 E151 11.3		30m wingspan	MARSHALLED
102 thru 104	S33 56.1 E151 11.3		18m wingspan	MARSHALLED
105 thru 107	S33 56.1 E151 11.3		18m wingspan	MARSHALLED
112, 112A	S33 56.0 E151 11.4		20m wingspan	MARSHALLED
ACCESS FROM TAXILANE DOM6				
97	S33 56.1 E151 11.4	16	B744	TOWED
97A	S33 56.1 E151 11.4	16	B737	MARSHALLED
97B	S33 56.1 E151 11.4	16	B737	MARSHALLED
97C	S33 56.1 E151 11.4	16	B763	MARSHALLED
98	S33 56.1 E151 11.4	17	B744	TOWED
98A	S33 56.1 E151 11.4	16	B737	MARSHALLED
98B	S33 56.1 E151 11.4	16	B737	TOWED
99	S33 56.1 E151 11.5	16	B744	TOWED
99A	S33 56.1 E151 11.5	17	B737	MARSHALLED

NOTE

YSSY/SYD



29 AUG 14

(10-9D)

SYDNEY, NSW, AUSTRALIA

- (KINGSFORD SMITH) INTL

PARALLEL RUNWAY USAGE

INDEPENDENT VISUAL APPROACHES

Aircraft may be processed via an ILS approach until visual, then cleared for an independent visual approach. Notification will be by the ATIS using the phrase 'EXPECT ILS APPROACH THEN INDEPENDENT VISUAL APPROACH WHEN VISUAL.' When visual, the pilot will be cleared for a visual approach and will be required to comply with the pilot responsibilities for independent visual approaches as described in the ATC section.

RADIO FAILURE PROCEDURES - INDEPENDENT VISUAL APPROACHES

In the event of a radio failure (or blocked frequency) on the Director frequency, pilots must comply with the following actions:

- a. On Pilot Navigation (IF VISUAL)
 - SQUAWK 7600 immediately.
 - Track to intercept final at a maximum 30° prior to the IAF for the nominated runway.
 - DO NOT PASS THROUGH FINAL OF THE NOMINATED RUNWAY.
- b. On a Radar Assigned Heading
 - SQUAWK 7600;
 - Maintain the assigned vector for no longer than 2 minutes;
 - Track as required to join final for the nominated runway at a maximum 30° intercept to commence final.
 - DO NOT PASS THROUGH FINAL OF THE NOMINATED RUNWAY.

Pilots should attempt to call on the alternate Director frequency (126.1/125.3). Attempts should also be made on the Tower frequency.

ARRIVALS

- a. If unable to participate in an ILS PRM approach, pilots must notify ATC prior to 120 DME Sydney (or, if departing within 120 DME Sydney, on first contact with ATC).
- b. Aircraft up to and including A300/B787 size may be processed to land on either of the parallel runways 16L/34R or 16R/34L.
- c. Aircraft landing Rwy 16R require approval to vacate to the left on Twys F, B3 & B4.
- d. Aircraft landing Rwy 16L/34R are to remain on Tower freq 124.7 until west of Twy S.
- e. Aircraft landing Rwy 34R and vacating Twy T2 are to taxi via Twy U and U1 unless otherwise advised.
- f. Aircraft landing Rwy 07/25 require approval to vacate on Twy C.
- g. All arriving aircraft are required to advise parking bay on first contact with Sydney Ground.

DEPARTURES

Departures shall normally be cleared in the order in which they are ready for takeoff, except that deviations may be made from this order to facilitate the maximum number of departures with the least average delay.

- a. Intersection departures by jet aircraft on Rwy 34L are NOT PERMITTED due to noise abatement requirements.
- b. Rwy 16R for departures to the South, West and Northwest, and departures from the Intl Terminal.
- c. Rwy 16L for departures to the North and East.
- d. Rwy 34L for departures to the West, Northwest and non-jets to the South, and departures from the Intl Terminal.
- e. Rwy 34R for departures to the North and domestic jets to the South.

NOTE:

1. Aircraft which operationally require use of either Rwy 16L/34R or Rwy 07/25 must notify ATC at Clearance Delivery stage.
2. International departures including A330/B787 aircraft and below may request or be offered a departure from Rwy 16L/34R at the Clearance Delivery stage.
3. Domestic Jet departures to the South may be assigned Rwy 16L for traffic management purposes.

YSSY/SYD

JEPPESEN

29 AUG 14 (10-9E)

.AIRPORT.
SYDNEY, NSW, AUSTRALIA


-(KINGSFORD SMITH) INTL

VISUAL DOCKING GUIDANCE SYSTEMS

The Visual Docking Guidance Systems used at Sydney are Nose-In-Guidance (NIG) systems which provide both azimuth and stopping information for specific aircraft types. There are four systems in use.

The first NIG system contains five elements whose locations are shown in the figure below.

- Position Identification Light
- Aerobridge Retracted Indicator
- Centerline Guidance Light
- Side Marker Board
- Side Marker Light

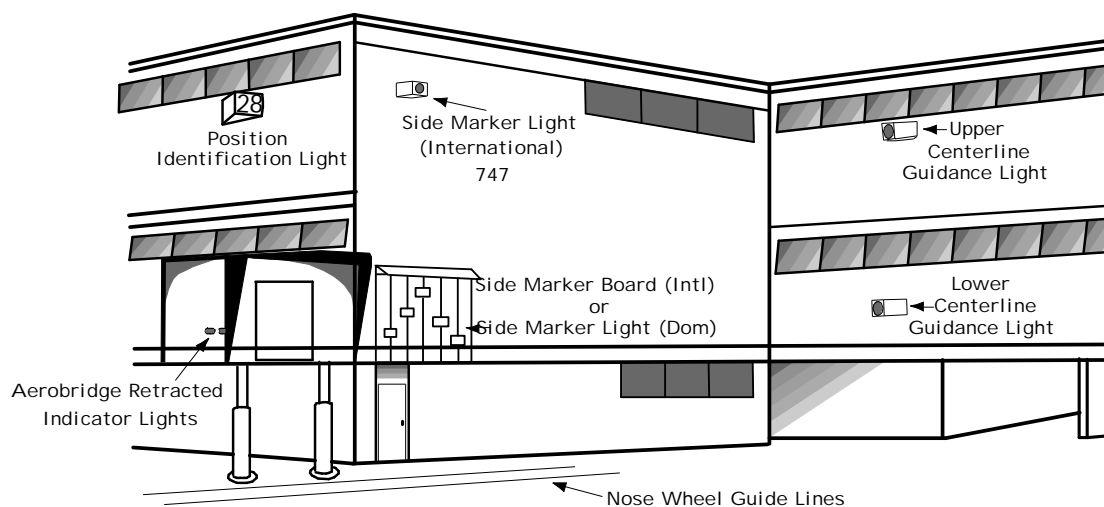

Visual Docking Guidance System

Aircraft should use the following elements for docking:

AIRCRAFT TYPES	CENTERLINE LIGHT	STOP
Domestic All types	Centerline Guidance Light	Side Marker Light
International All types except wide body	Lower Centerline Guidance Light	Side Marker Board
International DC-10, B-767, L-1011, A300B	Intermediate Centerline Guidance Light	Side Marker Board
International B-747	Upper Centerline Guidance Light	Side Marker Light

NOTE:

- Some International docking positions are not equipped for wide body aircraft and hence only the Lower Centerline Guidance light is provided.
- Heights of the Centerline Guidance Lights are:
 - Lower: up to 5M
 - Intermediate: 5M to 7.5M
 - Upper: above 7.5M

YSSY/SYD

JEPPESEN
6 JUN 14 (10-9F)

SYDNEY, NSW, AUSTRALIA

-(KINGSFORD SMITH) INTL

VISUAL DOCKING GUIDANCE SYSTEMS

The following is a brief description of the system:


- The Position Identification Light indicates the number of the docking position and has white numerals on a black background outlined in green neon tubing at night.
- The Aerobridge Retracted Indicator consists of two lights. The green light indicates the Aerobridge is in the fully retracted position. The red light indicates that the Aerobridge is not fully retracted or that an element of the visual guidance docking system is unserviceable.
- The Centerline Guidance Light provides azimuth information and is aligned with the left pilot position. The unit emits RED/GREEN light beams and the signals are interpreted as follows:

Red/Green	Green/Green	Green/Red
Aircraft is to the left of the centerline	Aircraft is on the centerline	Aircraft is to the right of the centerline

- The slats on the Side Marker Board indicate the stopping position for each type of aircraft. Approaching the position, the slat will show GREEN; at the stopping position, the slat will show BLACK; and beyond that position RED.
- There are two Side Marker Light systems that indicate the stopping position.

Domestic (All Types)


- Approaching the position, a preliminary dull GREEN light will show through the arrow-shaped aperture which also exhibits a cross bar.
- As the aircraft moves forward, the intensity of the green light increases until it becomes a bright arrow-head T shape which is the DC9 stopping point.
- As the aircraft continues, the bar of the stop signal disappears and the arrow-head starts to reduce in size.
- When the arrow-head disappears, two white bars appear, one above the other, indicating the stopping position. In some installations, two sets of bars are provided: one for the B727, the other for the B737.
- If the stopping position is passed, then a single RED bar appears.

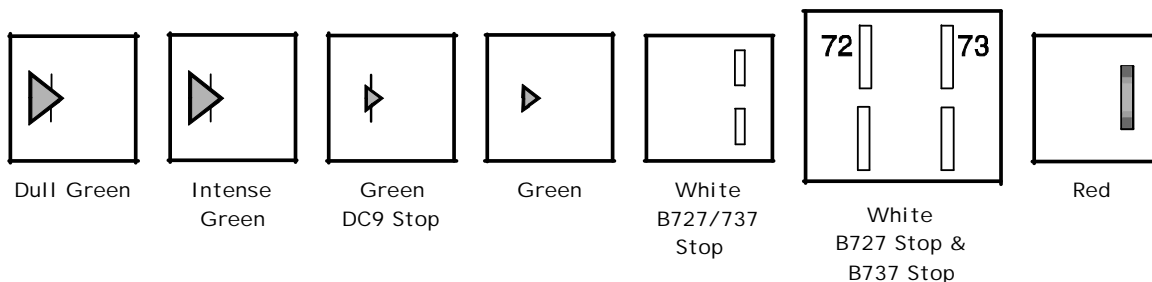

Side Marker Lights (Domestic) (DC-9, B-727 and 737)

International (For B747 Aircraft only)

This is the same as the domestic system described above except that there is only one set of white bars and no bar around the arrow-head.

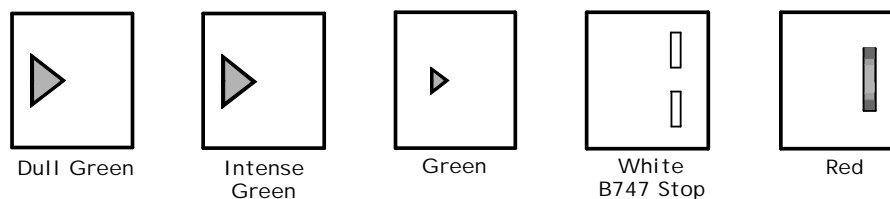

Side Marker Lights (International) (B747)

The above system is installed at Sydney (Kingsford Smith) Airport at the following locations:

- International Terminal - Bays 20, 22, 23, 24, 25, 35, 36, 37, 51, 53, 54, 58 and 59.
- Domestic Terminal - Bays 40, 52, 55, 22, 25, 30, 52, 24, 28 and 40.

YSSY/SYD

JEPPESEN

6 JUN 14 (10-9G)

SYDNEY, NSW, AUSTRALIA

- (KINGSFORD SMITH) INTL

VISUAL DOCKING GUIDANCE SYSTEMS

The second NIG system in use at Sydney Intl contains the following three elements whose locations are shown in Figures 1 and 2:

- Position Identification Light,
- Centerline Guidance Light, and
- Stopping Position Indicator.


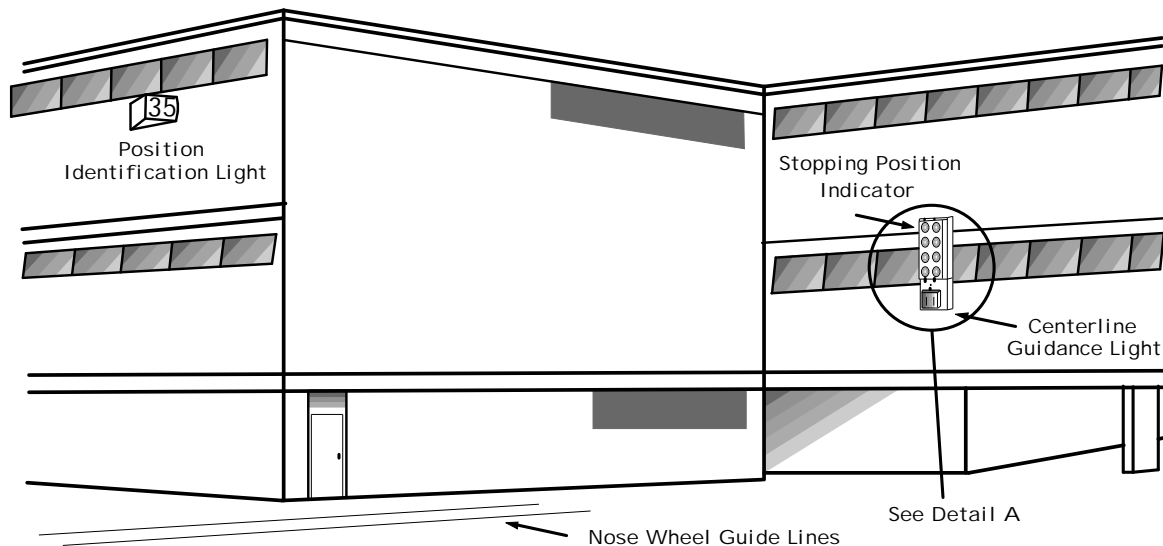


Figure 1 - Visual Docking Guidance System

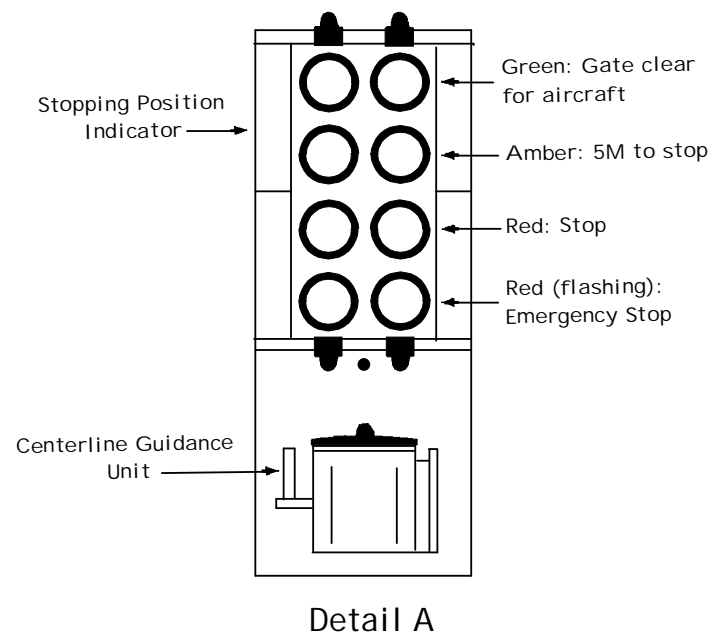

YSSY/SYD

JEPPESEN
6 JUN 14 (10-9H)

SYDNEY, NSW, AUSTRALIA
-(KINGSFORD SMITH) INTL

VISUAL DOCKING GUIDANCE SYSTEMS


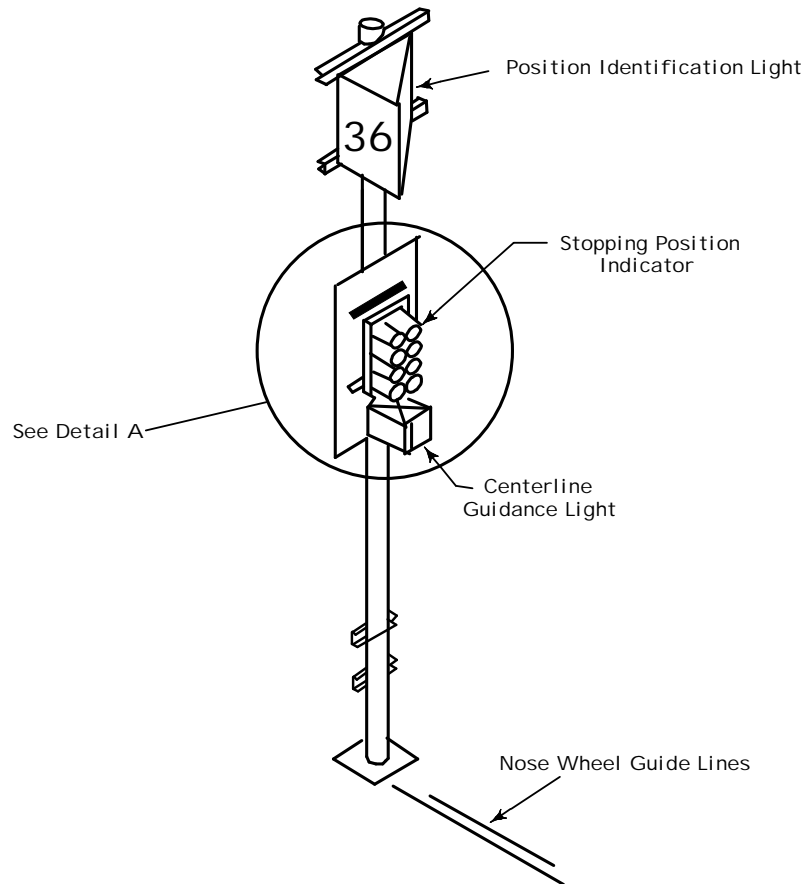


Figure 2 - Visual Docking Guidance System

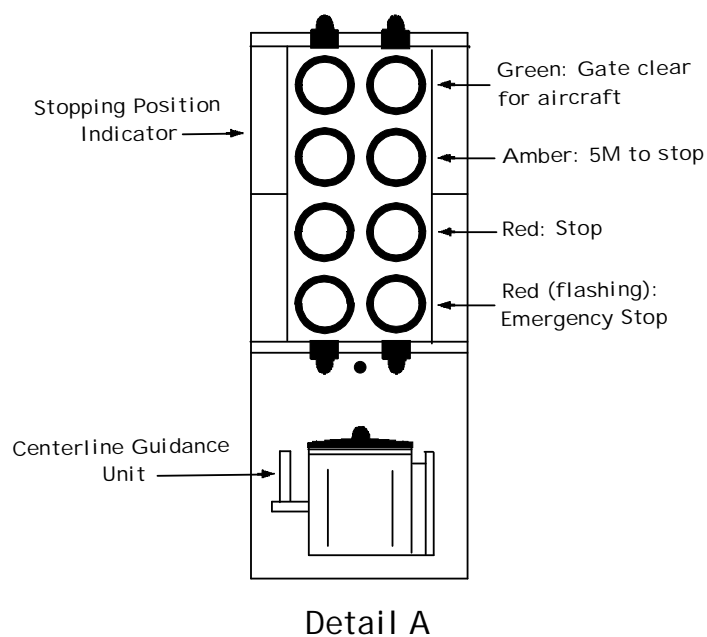

YSSY/SYD


JEPPESEN
 6 JUN 14 (10-9J)

SYDNEY, NSW, AUSTRALIA

- (KINGSFORD SMITH) INTL

VISUAL DOCKING GUIDANCE SYSTEMS

Aircraft should use the following elements for docking:

AIRCRAFT TYPES	CENTERLINE LIGHT	STOP
All types	Centerline Guidance Light	Stopping Position Indicator

The following is a brief description of the system:

- The Position Identification Light indicates the number of the docking position and has white numerals on a dark background outlined in green neon tubing at night.
- The Centerline Guidance Light provides azimuth information and is aligned with the left pilot position. The unit emits RED/GREEN light beams and the signals are interpreted as follows:

Red/Green	Green/Green	Green/Red
Aircraft is to the left of centerline	Aircraft is on centerline	Aircraft is to the right of centerline

- The Stopping Position Indicator is controlled by an airline ground marshaller and provides stopping information. The signals are interpreted as follows:

GREEN	GO	Gate is clear for aircraft.
AMBER	SLOW	Approximately 16' (5m) to STOP
RED	STOP	Stop immediately.
RED (FLASHING)	EMERGENCY STOP	

YSSY/SYD

JEPPESEN
6 JUN 14 (10-9K)

SYDNEY, NSW, AUSTRALIA

-(KINGSFORD SMITH) INTL

VISUAL DOCKING GUIDANCE SYSTEMS

AIRCRAFT POSITIONING AND INFORMATION SYSTEM (APIS)

The third NIG system in use at Sydney Intl is installed on International Terminal bays 2, 3, 4, 12 and Domestic bays 33, 52, 53 and 55.

System Description:


The APIS is based on a centerline guidance sub-display. The steering and stop indication is provided from a display unit mounted on a pole in front of the cockpit in line with the left hand pilot seat. The parking bay position identification is mounted on top of the guidance pole.

On approach to the parking position, the pilot will see the display box face showing two rows of yellow alpha-numeric characters on a black background across the top, an illuminated closing-rate "thermometer" at lower left, and an illuminated azimuth guidance display at lower right. The alpha-numeric characters on the top row should be flashing. (See Figure 3)

The following is the sequence of APIS operation from initial approach to STOP.

- Identify the correct parking bay position.
- Ensure that the aerobridge retraction light indicates green.
- Follow the taxi-in line and watch the centerline beacon.
- Check that the correct aircraft type is flashing and that the door number is shown (where applicable).
- About 20M before STOP, the aircraft type display goes steady and the door number disappears.
- Follow the azimuth guidance display. The black arrow heads indicate which direction to steer for the centerline. When the aircraft is properly aligned in azimuth, the black vertical bar will be displayed.
- The full closing rate 'thermometer' indicates at least 13M to STOP.
- When the aircraft reaches 13M to STOP, the "thermometer" bar lights begin to move from bottom to top.
- The deletion of each 'thermometer' bar indicates about one half meter progression.
- When the STOP position is reached, all the closing rate 'thermometer' lights extinguish and the lower display indicates STOP. If the aircraft is parked correctly, the top display indicates OK.
- If the aircraft overshoots the limit for correct parking, the top display indicates TOO FAR (alternating TOO then FAR).
- The entire display automatically shuts down after some seconds.

Note: When the last row of lights of the closing rate 'thermometer' is extinguished and the word STOP is displayed, the aircraft should be at a standstill.

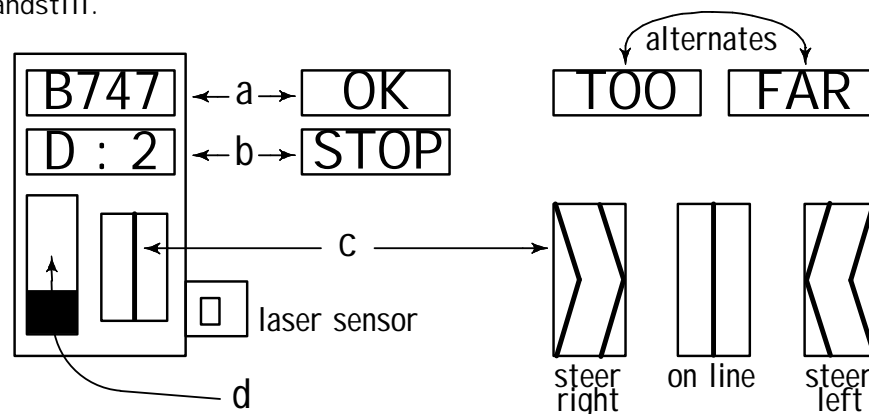

LEGEND

- Display: ACFT type, OK or TOO/FAR
- Display: Door Number or STOP
- Centerline Beacon: steering guidance
- 'Thermometer': closing rate indication - stopping guidance

Note:

The lettering is yellow on a black background. The 'thermometer' is yellow and goes black from bottom to top. The centerline beacon is a central black band surrounded by yellow.

Figure 3 - APIS Visual Docking Guidance System

YSSY/SYD


JEPPESEN
 6 JUN 14 (10-9L)

SYDNEY, NSW, AUSTRALIA

-(KINGSFORD SMITH) INTL

VISUAL DOCKING GUIDANCE SYSTEMS

SAFEGATE DOCKING GUIDANCE SYSTEM (SAFEGATE DGS)

The fourth NIG system is the Safegate Docking Guidance System and is used at Sydney International Terminal (Bays 1, 5, 6, 6A, 8, 9, 10, 24, 25, 30, 31, 32, 33, 34, 35, 36, 37, 51, 53, 54, 55, 56, 57, 58, 59, 60, 61, 63, 73, 74, 75, 76 and 77), Sydney Domestic Terminal (Bays 31, 32, 34, 35, 36, 38, 39, 40, 41, 42, 43, 44, 44A, 45, 45A, 54, 56 and 57) and Sydney Qantas Terminal (Bays 1, 2, 3, 4, 5, 6, 7, 7A, 8, 9, 10, 11, 12, 13, 14 and 16). Its operation is based on laser scanning of the incoming aircraft. The complete system consists of the following three elements:

- a. Position Identification Unit (Bay Marker);
- b. Aerobridge Retracted Indicator Light; and
- c. DGS NIG Unit.

System Description

The Position Identification Unit gives clear indication of the parking bay for the aircraft. It consists of large white numerals on a dark background (illuminated at night by green neon lights).

The Aerobridge Retraction Indicator Light, mounted on the aerobridge, gives an early warning of the state of aerobridge location. Green indicates a fully retracted aerobridge position or a safe pre-parked position; red indicates that the aerobridge is out of position and the pilot should not proceed with parking that aircraft.

The NIG unit, mounted on the Terminal wall, consists of two components which supply the following information to the pilot:

- a. The top alphanumeric information display which shows aircraft type designation and other message information as necessary in yellow.
- b. The azimuth and centerline guidance displays in red and yellow, and the Closing Rate Bar in yellow.

Aircraft Types

The aircraft types which can utilize the system at each airport are displayed as follows:

Type	Display
Boeing	777, 767, 747, 737
McDonnell Douglas	MD-11, DC-10
Airbus Industries	340, 330, 310, 300
British Aerospace	146
Lockheed	L1011

YSSY/SYD

 JEPPESEN
6 JUN 14 (10-9M)

SYDNEY, NSW, AUSTRALIA

-(KINGSFORD SMITH) INTL

VISUAL DOCKING GUIDANCE SYSTEMS

System Operation

The following is the sequence of system operation from initial approach to STOP:

- a. The pilot identifies the correct parking bay position.
- b. The pilot ensures that the aerobridge retraction light is green.
- c. The pilot observes that the rising vertical yellow arrows are indicating the system is activated and searching for the approaching aircraft.

NOTE: The pilot must not enter the stand area unless the rising vertical arrows are displayed.

- d. The pilot follows the taxi-in line and checks that the correct aircraft type is displayed in yellow.

NOTE: The pilot must not enter the stand area unless the correct aircraft type is displayed.

- e. On successful capture of the aircraft, the vertical arrows are replaced by the yellow T-shaped Closing Rate Bar.

NOTE: The pilot must not proceed to the bridge unless the arrows have been superseded by the Closing Rate Bar.

- f. A vertical yellow arrow shows the aircraft position in relation to the centerline.

- g. A flashing red arrow indicates the direction to turn to return to the centerline.

NOTE: If the aircraft is approaching faster than the accepted speed, the system will show SLOW DOWN as a warning.

- h. The display of the yellow digital closing rate countdown will start when the aircraft is 20 meters from the STOP position.

NOTE: If the detected aircraft is lost prior to 12 meters to STOP, the display will show WAIT. The docking will continue as soon as the system detects the aircraft again.

- i. When the aircraft is 12 meters from the STOP position, the Closing Rate Bar will decrease in size from the bottom by one row of lights per 0.5 meters closing rate.

NOTE: If the detected aircraft is lost after 12 meters to STOP, the display will show STOP and ID FAIL. Assistance must then be sought from the ground engineers.

- j. When the correct STOP position is reached, the display shows STOP and red lights will be lit.

- k. When the aircraft has parked, OK will be displayed.

- l. If the aircraft has overshot the position, TOO FAR will be displayed.

- m. When ground engineers have placed the chocks at the nosewheel, they will manually change the display to CHOCK ON.

- n. During heavy rain or fog, the visibility for the docking system might be reduced. When the system is activated and in capture mode, the display will deactivate the rising vertical arrows and show DOWN GRADE. This text will be superseded by the Closing Rate Bar once the aircraft is detected.

NOTE: The pilot must not continue the approach to the bridge unless the DOWN GRADE text has been superseded by the Closing Rate Bar.

Note: Ground engineers have access to emergency push-buttons to deactivate the system. When an emergency stop is activated, the display will show STOP. The ground engineers will then be required to complete the docking manually once the emergency situation is cleared.


YSSY/SYD

JEPPESEN
6 JUN 14 (10-9N)

SYDNEY, NSW, AUSTRALIA
-(KINGSFORD SMITH) INTL

VISUAL DOCKING GUIDANCE SYSTEMS

Safegate Docking Guidance System

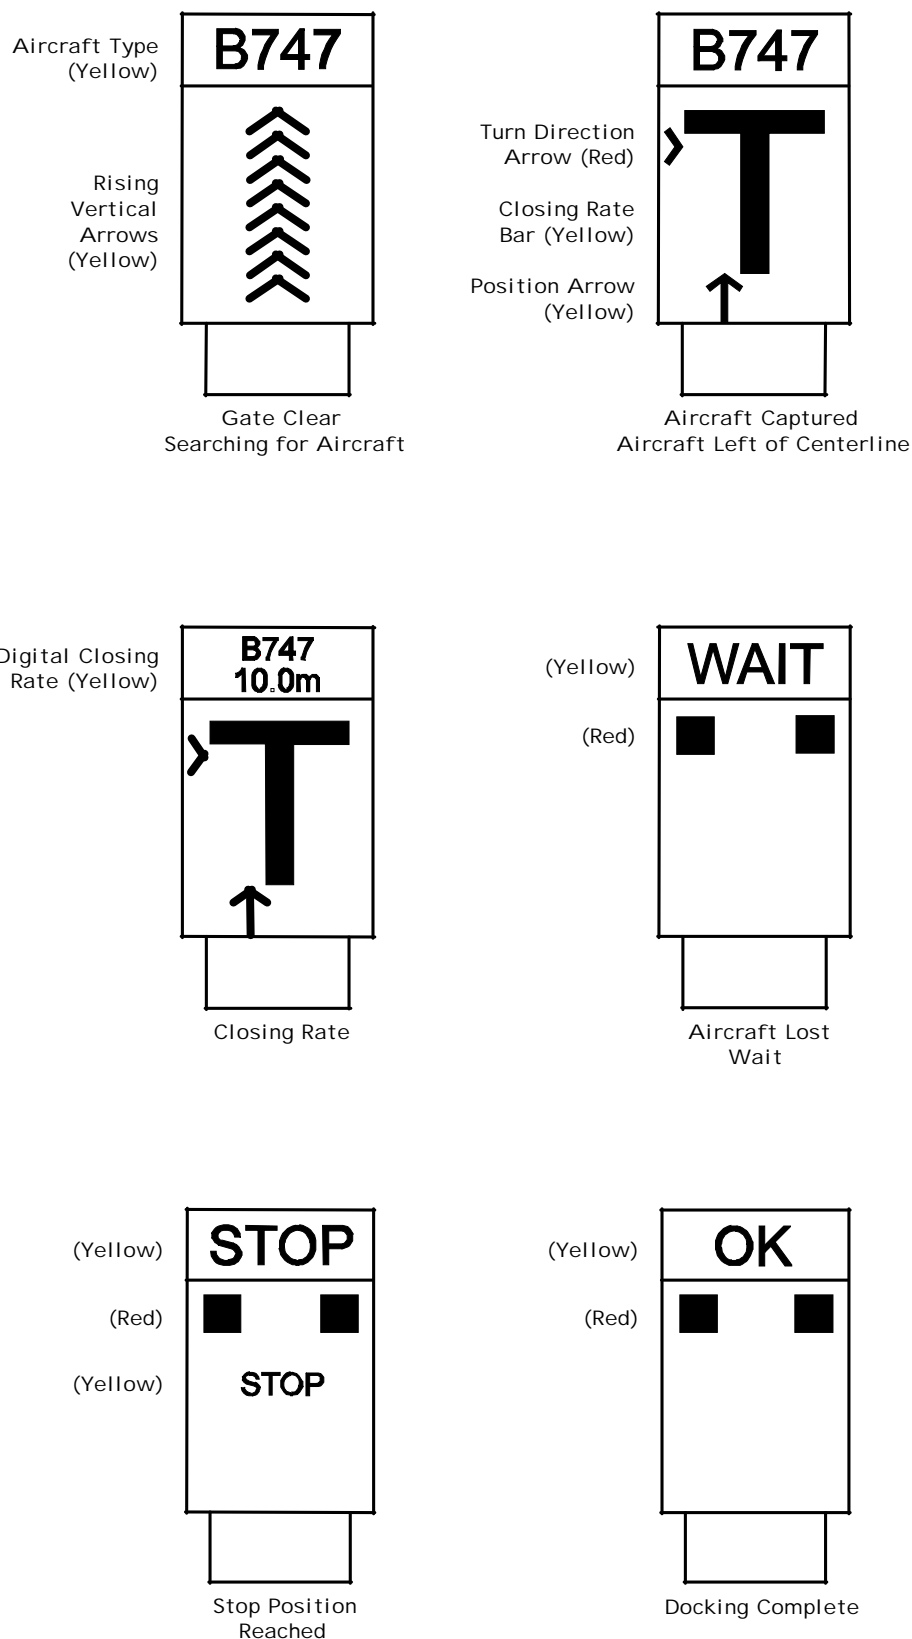

YSSY/SYD

15 AUG 14

(11-0)

.Eff.21.Aug.

SYDNEY, NSW, AUSTRALIA

-(KINGSFORD SMITH) INTL

ILS PRM USER INSTRUCTIONS

ATTENTION ALL USERS of ILS PRM (PRECISION RUNWAY MONITOR)

PILOT REQUIREMENTS: Before conducting a simultaneous close parallel ILS PRM approach, pilots must have completed training approved by CASA, including:

1. viewing the PRM video "ILS PRM Approaches - A Pilot's Approach";
2. familiarization with the ILS PRM approach procedures in AIP DAP or equivalent operational documents;
3. familiarization with the breakout procedure and phraseology; and
4. completion of an examination conducted by the operator's training and checking organization or chief pilot holding instrument renewal approval or flying training school holding instrument training approval.

Pilots who complete the training through other than a company training and checking organization or chief pilot must obtain log book endorsement by the training organization.

Simulator training in breakout procedures is not mandatory but is strongly recommended, particularly in aircraft fitted with automated flight guidance systems.

When ILS/PRM approaches are nominated on the ATIS, pilots MUST advise ATC prior to 120 DME 'SY' (or on first contact with ATC if departing within 120 DME 'SY') if unable to participate.

ATIS: The ATIS will advise when ILS PRM approaches are in progress.

APPROACH CHARTS: There are now multiple ILS approach charts for each parallel runway.

ENSURE THAT YOU USE THE ILS PRM CHART APPLICABLE TO CAT I OR CAT II ILS.

DUAL VHF REQUIREMENTS: To avoid blocked transmission, each runway will have both a TWR and a PRM frequency. The TWR and PRM controllers will transmit on both frequencies. PILOTS MUST transmit on the TWR frequency ONLY, but LISTEN TO BOTH. It is important that the volume of both frequencies is set to the same level so that transmissions are heard on at least one frequency if the other is blocked.

NOTE: Pilots must have the relevant PRM frequency selected prior to transfer to aerodrome control. It is important the PRM frequency volume is preset prior to this transfer.

AUTOPILOT COUPLED APPROACHES

It is recommended that ILS PRM approaches are flown with the aircraft autopilot coupled whenever practicable.

TCAS SELECTION: Pilots may select TCAS in the TA mode or maintain RA mode on receipt of instructions to contact the Tower.

New PRM video reflecting these changes is available online at
<http://www.airservicesaustralia.com/precision-runway-monitor/changes-to-tcas-with-ils-prm>

HAND FLY A BREAKOUT: When issued with Breakout instructions from an ILS PRM approach, time is critical. ALL BREAKOUT procedures MUST BE HAND FLOWN. In exceptional circumstances a descending breakout may be given the assigned altitude will not be below the applicable minimum vectoring altitude (MVA).

DEVIATIONS: The ILS PRM radar display indicates when an aircraft's track will take it into the NO TRANSGRESSION ZONE (NTZ) within the next ten (10) seconds if no course alteration is made. In this situation an ADVISORY will be issued by the PRM controller to the aircraft. The phraseology will be:

"RADAR INDICATES YOU ARE DEVIATING
LEFT (OR RIGHT) OF THE LOCALIZER COURSE"

Pilots are not expected to acknowledge a deviation advisory but should compare LOC tracking indications and use the indicator most consistent with the controllers advice. The PRM controller is not expected to provide an indication of displacement from the applicable LOC course. On receipt of a deviation advisory, pilots should promptly adjust aircraft heading to avoid penetrating the NTZ and regain the LOC course.

BREAKOUT: If an aircraft enters the NTZ, it is mandatory for the PRM controller to issue a breakout instruction to that aircraft plus any affected aircraft on the adjacent LOC course. Breakout phraseology will be:

"BREAKOUT ALERT, (callsign) TURN LEFT
(or RIGHT) IMMEDIATELY HEADING (3 digits),
CLIMB (or DESCEND) TO (altitude)"


YSSY/SYD
-(KINGSFORD SMITH) INTL

JEPPESSEN
4 JUL 14 (11-1)


SYDNEY, NSW, AUSTRALIA
ILS-Z or LOC-Z Rwy 07

BRIEFING STRIP

ATIS 112.1 118.55 126.25 428				SYDNEY Approach (R) North 124.4 South 128.3		Director West 126.1 East 125.3	
SYDNEY Tower Rwy 16R/34L & 07/25 120.5 Rwy 16L/34R 124.7				Ground West of Rwy 16R/34L 126.5 East of Rwy 16R/34L 121.7			
LOC ISY 109.9	Final Apch Crs 062^	GS OM 1300' (1284')	ILS DA(H) 270' (254')	Apt Elev 21' Rwy 07 16'		<div>2700'</div>	
MISSED APCH: Track 062^, Climb to 2000' or as directed by ATC.							
Alt Set: hPa Rwy Elev: 1 hPa Trans level: FL 110 Trans alt: 10000' 1. ISY DME REQUIRED (LOC Only). 2. ATC Approach Speeds: At GLF NDB 185 - 160 KT, at 5NM from Threshold 160 - 150 KT. Advise Approach if unable to comply.							
							MSA SY VOR 2100' within 10 NM

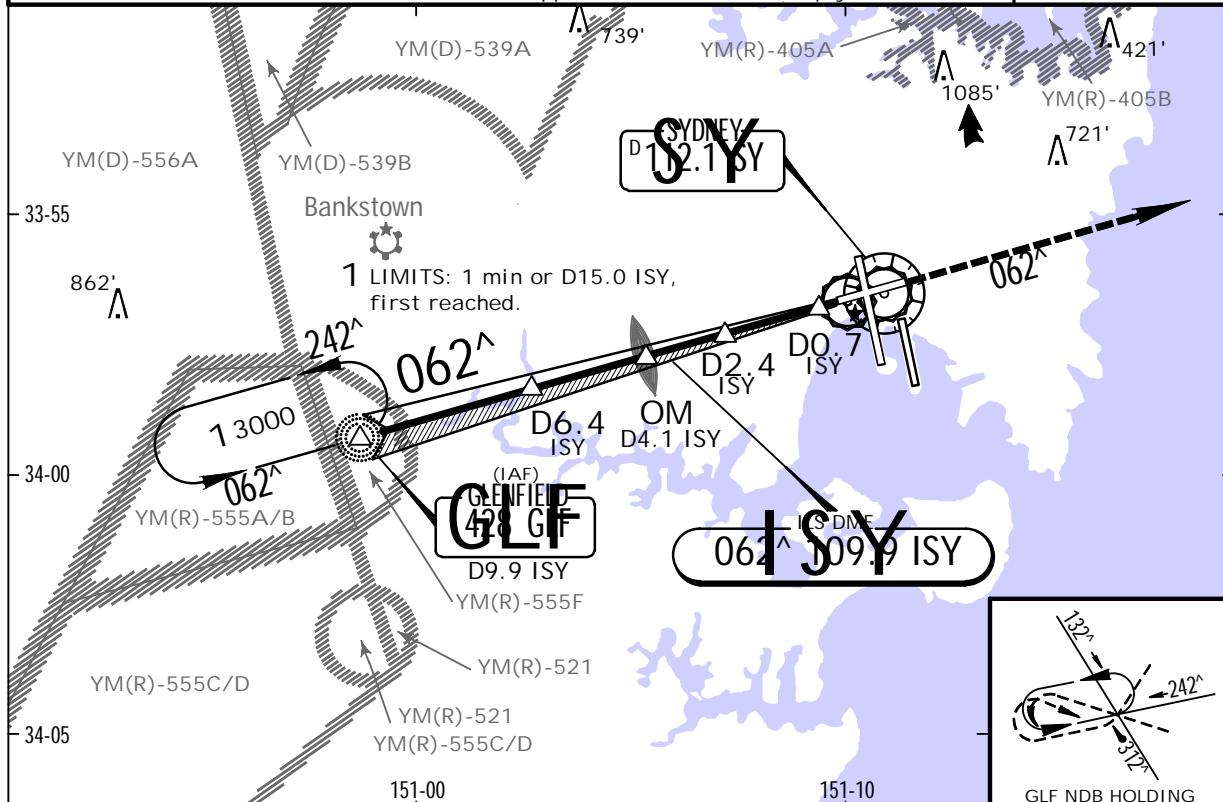


LOC (GS out)	ISY DME	9.4	9.0	8.0	7.0	6.0	5.0	4.0	3.0	2.0	1.9
	ALTITUDE	3000'	2880'	2560'	2240'	1920'	1600'	1280'	970'	650'	600'

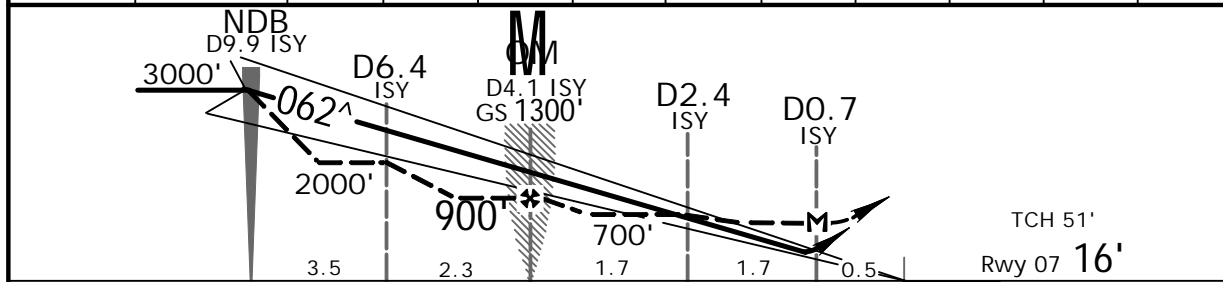

Gnd speed-Kts	70	90	100	120	140	160					
GS	3.00°	372	478	531	637	743	849				
MAP at D0.7 ISY											

STRAIGHT-IN LANDING RWY07		CIRCLE-TO-LAND	
ILS DA(H) 270' (254')	LOC (GS out) DME MDA(H) 600' (584')	Max Kts.	MDA(H)
		100	710' (689')-2.4 km
		135	1000' (979')-4.0 km
		180	1000' (979')-5.0 km
		205	

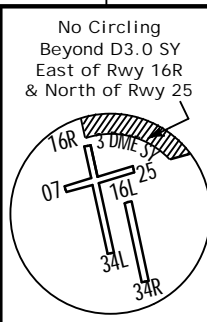

IS OPS

YSSY/SYD


-(KINGSFORD SMITH) INTL

JEPPESSEN
4 JUL 14 (11-2)


SYDNEY, NSW, AUSTRALIA
ILS-Y or LOC-Y Rwy 07

BRIEFING STRIP

ATIS 112.1 118.55 126.25 428				SYDNEY Approach (R) North 124.4 South 128.3		Director West 126.1 East 125.3	
SYDNEY Tower Rwy 16R/34L & 07/25 120.5 Rwy 16L/34R 124.7				Ground West of Rwy 16R/34L 126.5 East of Rwy 16R/34L 121.7			
LOC ISY 109.9	Final Apch Crs 062^	GS OM 1300'(1284')	ILS DA(H) 270'(254')	Apt Elev 21' Rwy 07 16'		<div>2700'</div> <div>MSA SY VOR 2100' within 10 NM</div>	
MISSED APCH: Track 062^. Climb to 2000' or as directed by ATC.							
Alt Set: hPa Rwy Elev: 1 hPa Trans level: FL 110 Trans alt: 10000'							
1. SY DME REQUIRED (LOC Only). 2. GNSS permitted in lieu of DME. Reference waypoint SY VOR. 3. ATC Approach Speeds: At GLF NDB 185 - 160 KT, at 5NM from Threshold 160 - 150 KT. Advise Approach if unable to comply.							

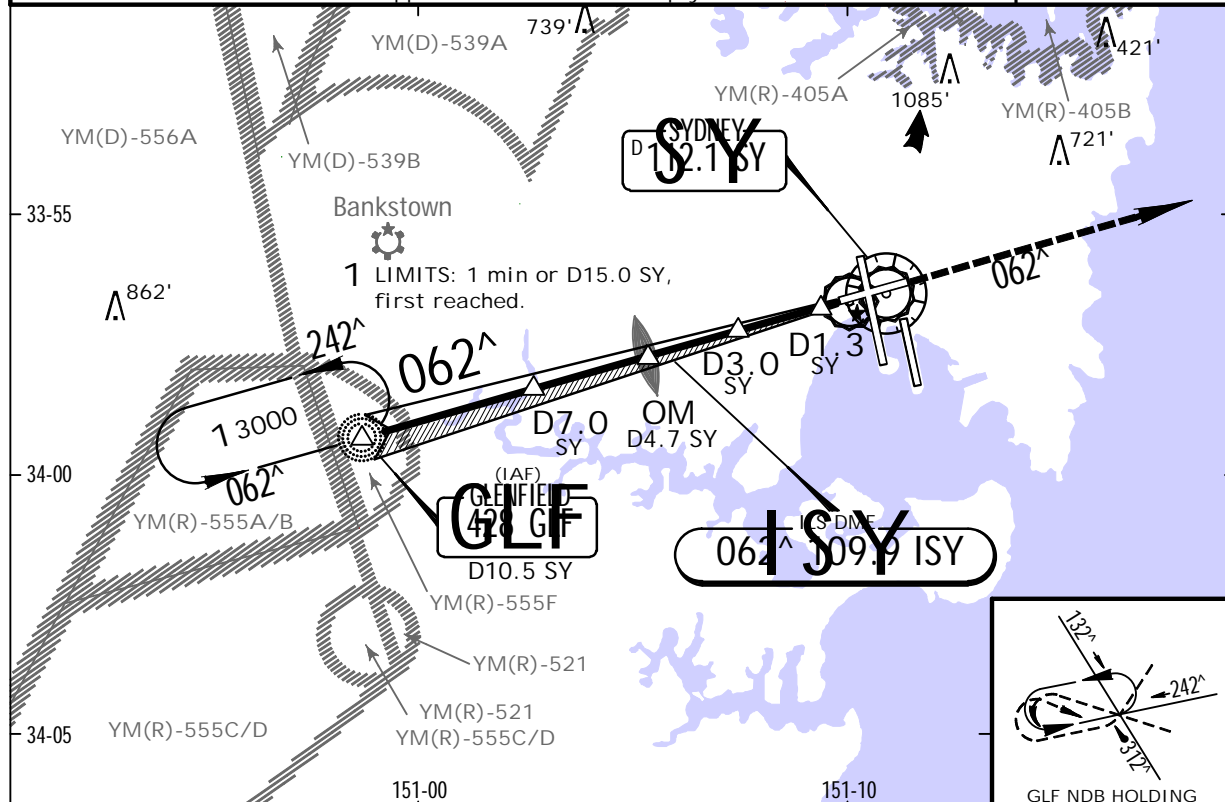


LOC (GS out)	SY DME	10.1	9.0	8.0	7.0	6.0	5.0	4.0	3.0	2.5
	ALTITUDE	3000'	2670'	2350'	2030'	1710'	1390'	1070'	750'	600'

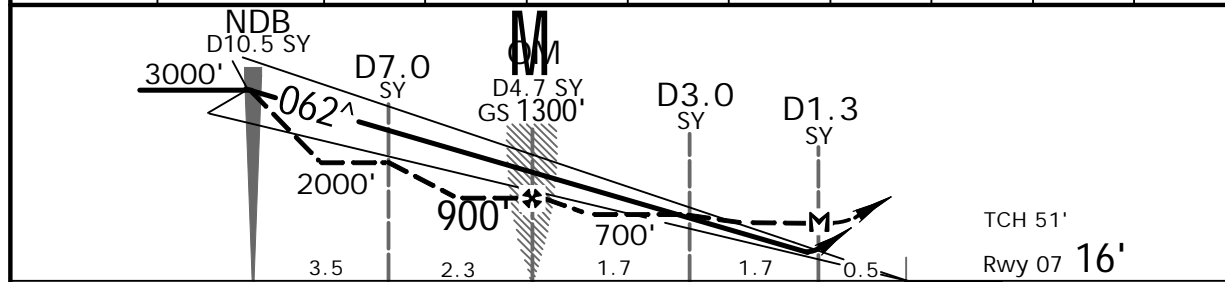

Gnd speed-Kts	70	90	100	120	140	160	REIL PAPI	062° 2000'
GS	3.00°	372	478	531	637	743		
MAP at D1.3 SY								

STRAIGHT-IN LANDING RWY07		CIRCLE-TO-LAND	
ILS DA(H) 270' (254')	LOC (GS out) DME MDA(H) 600' (584')	Max Kts.	MDA(H)
A B C D	1.5 km	100	710' (689')-2.4 km
		135	1000' (979')-4.0 km
		180	1000' (979')-5.0 km
		205	1000' (979')-5.0 km

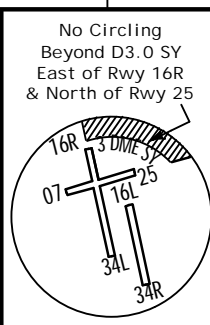

YSSY/SYD

-(KINGSFORD SMITH) INTL

JEPPESSEN


4 JUL 14

(11-3)


SYDNEY, NSW, AUSTRALIA
ILS-Z or LOC-Z Rwy 16L

BRIEFING STRIP™


ATIS				SYDNEY Approach (R)				Director			
112.1 118.55 126.25 428				North 124.4		South 128.3		West 126.1		East 125.3	
SYDNEY Tower Rwy 16R/34L & Rwy 16L/34R 124.7 07/25 120.5				Ground West of Rwy 16R/34L 126.5 East of Rwy 16R/34L 121.7							
LOC ISS 110.9		Final Apch Crs 155^		GS D6.0 ISS 1920' (1904')		ILS DA(H) 220' (204')		Apt Elev 21' Rwy 16L 16'		<div>2700'</div> <div>MSA SY VOR 2100' within 10 NM</div>	
MISSED APCH: Track 155^, At MANDATORY 600', turn LEFT track 125^, Climb to 3000' or as directed by ATC.											
Alt Set: hPa Rwy Elev: 1 hPa Trans level: FL 110 Trans alt: 10000' 1. ISS DME REQUIRED. 2. ATC Approach Speeds: At 10NM from Threshold 185 - 160 KT, at 5NM from Threshold 160 - 150 KT. Advise Approach if unable to comply. 3. Holding as directed by ATC.											

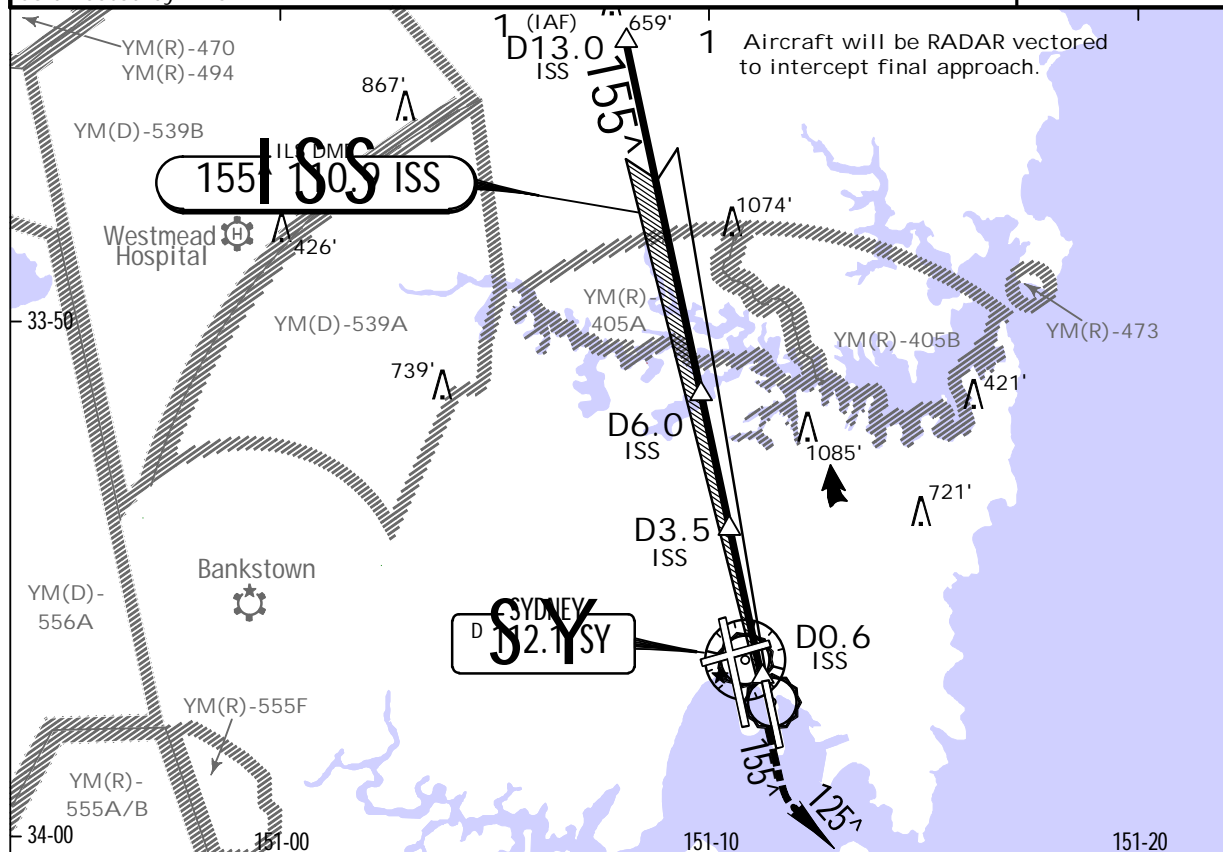


LOC (GS out)	ISS DME	12.5	12.0	11.0	10.0	9.0	8.0	7.0	6.0	5.0	4.0	3.0	2.0	1.5
	ALTITUDE	4000'	3830'	3520'	3200'	2880'	2560'	2240'	1920'	1610'	1290'	970'	650'	480'

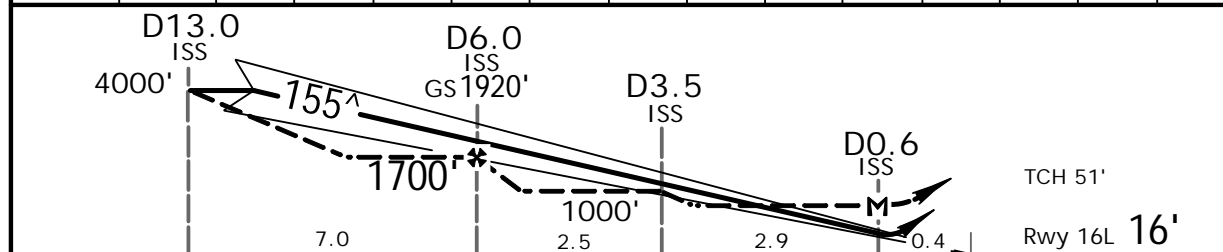

Gnd speed-Kts	70	90	100	120	140	160	HIALS	MANDATORY	125°	3000'
GS	3.00°	372	478	531	637	743	PAPI	600'	LT	
MAP at D0.6 ISS										

STRAIGHT-IN LANDING RWY16L						CIRCLE-TO-LAND		<div>No Circling </div>
ILS DME			LOC (GS out) DME					
DA(H) 220' (204')			MDA(H) 480' (464')					
FULL		HIRL out	HIALS out	HIALS out				
A						A	NA	
B	RVR 550m		1.2 km	1.5 km	1.5 km	2.4 km		B
C	VIS 0.8 km							C

NS OPS

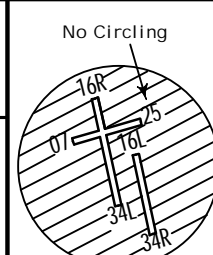

YSSY/SYD

-(KINGSFORD SMITH) INTL

4 JUL 14

11-4



JEPPESSEN

SYDNEY, NSW, AUSTRALIA


ILS-Z PRM Rwy 16L

CAUTION: SIMULTANEOUS CLOSE PARALLEL OPERATIONS

ATIS 112.1 118.55 126.25 428				SYDNEY Approach (R) North 124.4 South 128.3		Director West 126.1 East 125.3	
SYDNEY Tower Rwy 16L/34R 124.7 Final 07/25 120.5				MONITOR PRM 133.95		West of Rwy 16R/34L Ground 126.5 East of Rwy 16R/34L 121.7	
LOC ISS 110.9	Apch Crs 155^	GS D6.0 ISS 1920' (1904')	ILS DA(H) 220' (204')	Apt Elev 21' Rwy 16L 16'			
MISSED APCH: Track 155^. At MANDATORY 600', turn LEFT track 125^. Continue climb to 3000' or as directed by ATC.						2700'	
Alt Set: hPa Rwy Elev: 1 hPa Trans level: FL 110 Trans alt: 10000' 1. ISS DME REQUIRED. 2. Dual VHF communications required. 3. See 11-0 for "ILS PRM USER INSTRUCTIONS". 4. ATC Approach Speeds: At 10NM from Threshold 185 - 160 KT, at 5NM from Threshold 160 - 150 KT. Advise Approach if unable to comply. 5. Holding as directed by ATC.							

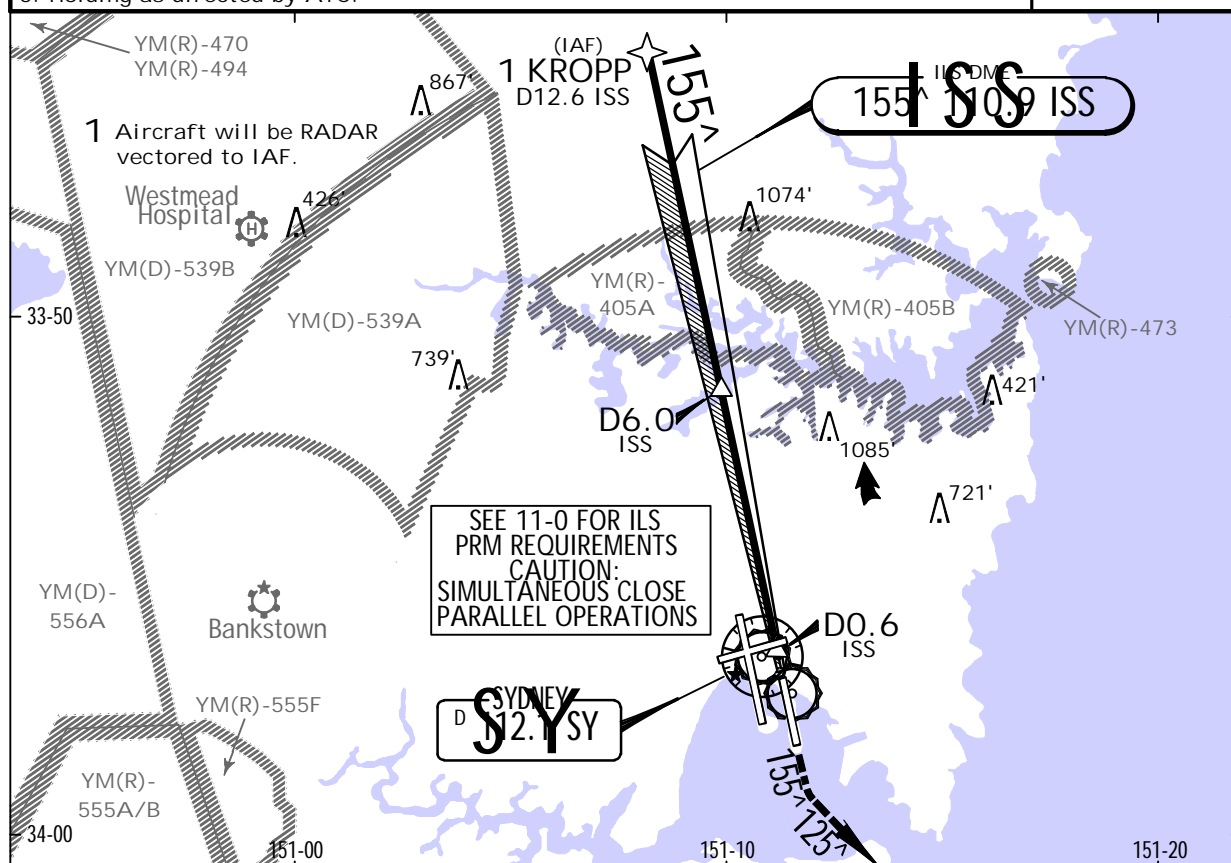

ISS DME	12.5	12.0	11.0	10.0	9.0	8.0	7.0	6.0	5.0	4.0	3.0	2.0	1.0	0.6
ALTITUDE	4000'	3830'	3520'	3200'	2880'	2560'	2240'	1920'	1610'	1290'	970'	650'	330'	220'

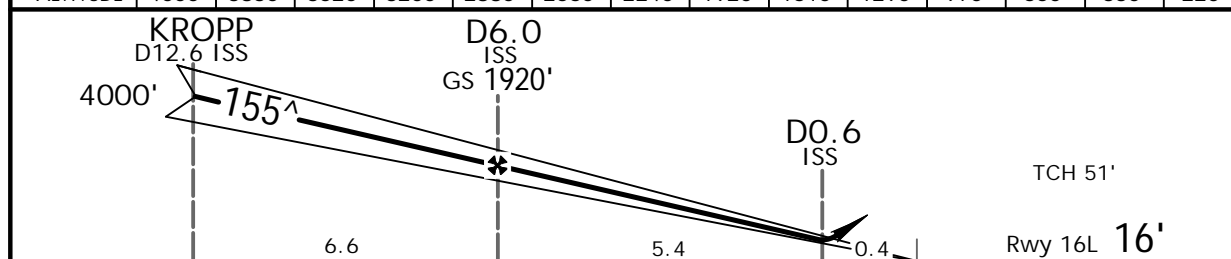

Gnd speed-Kts	70	90	100	120	140	160	
GS 3.00^	372	478	531	637	743	849	

STRAIGHT-IN LANDING RWY 16L				CIRCLE-TO-LAND		
ILS DA(H) 220' (204')						
FULL		HIRL out	HALS out			
A				A		
B	RVR 550m	1.2 km	1.5 km	B	NA	
C	VIS 0.8 km			C		

YSSY/SYD

-(KINGSFORD SMITH) INTL


JEPPESSEN

4 JUL 14 (11-5)


SYDNEY, NSW, AUSTRALIA
ILS-Y or LOC-Y Rwy 16L

BRIEFING STRIP™

ATIS 112.1 118.55 126.25 428				SYDNEY Approach (R) North 124.4 South 128.3				Director West 126.1 East 125.3			
SYDNEY Tower Rwy 16R/34L & Rwy 16L/34R 124.7 07/25 120.5				Ground West of Rwy 16R/34L 126.5 East of Rwy 16R/34L 121.7							
LOC ISS 110.9		Final Apch Crs 155^		GS D5.2 SY 1920' (1904')		ILS DA(H) 220' (204')		Apt Elev 21' Rwy 16L 16'		<div><div></div><div>2700'</div></div> <div>MSA SY VOR 2100' within 10 NM</div>	
MISSED APCH: Track 155^. At MANDATORY 600', turn LEFT track 125^. Climb to 3000' or as directed by ATC.											
Alt Set: hPa Rwy Elev: 1 hPa Trans level: FL 110 Trans alt: 10000'											
1. SY DME REQUIRED. 2. GNSS permitted in lieu of DME. Reference waypoint SY VOR. 3. ATC Approach Speeds: At 10NM from Threshold 185 - 160 KT, at 5NM from Threshold 160 - 150 KT. Advise Approach if unable to comply. 4. Holding as directed by ATC.											

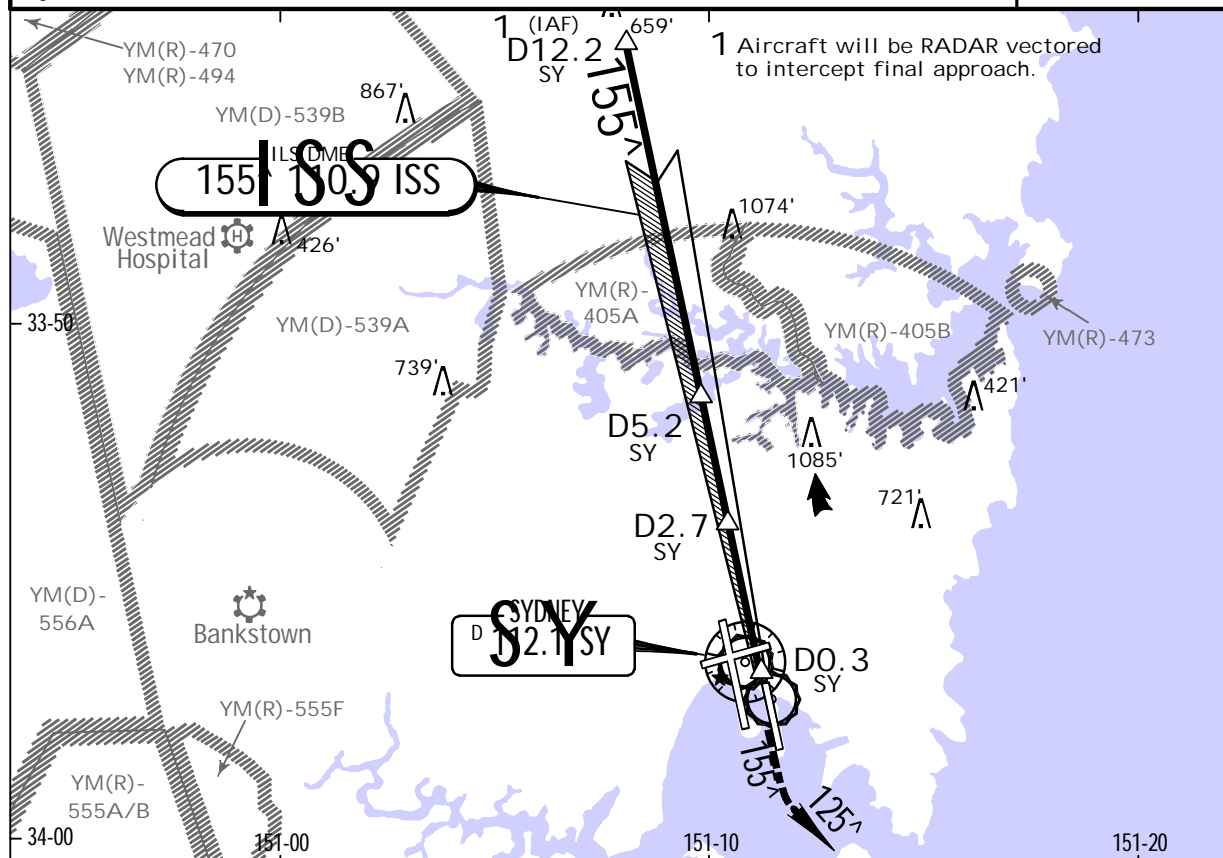


LOC (GS out)	SY DME	11.8	11.0	10.0	9.0	8.0	7.0	6.0	5.2	4.0	3.0	2.0	1.0	0.8
ALTITUDE		4000'	3760'	3440'	3120'	2800'	2480'	2170'	1920'	1530'	1210'	890'	560'	480'

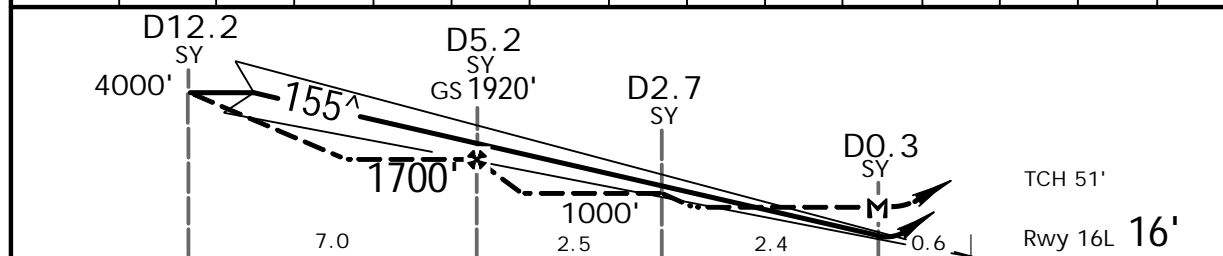

Gnd speed-Kts	70	90	100	120	140	160	HIALS PAPI PAPI	MANDATORY 125^ 3000'	LT ↑
GS	3.00^	372	478	531	637	743			
MAP at D0.3 SY									

STRAIGHT-IN LANDING RWY 16L				CIRCLE-TO-LAND			
ILS DME DA(H) 220' (204')		LOC (GS out) DME MDA(H) 480' (464')				No Circling	
FULL	HIRL out	HIALS out	HIALS out				
A							
B	RVR 550m	1.2 km	1.5 km	1.5 km	2.4 km	NA	
C	VIS 0.8 km						

NS OPS



YSSY/SYD

-(KINGSFORD SMITH) INTL

4 JUL 14

11-6


JEPPESSEN

SYDNEY, NSW, AUSTRALIA
ILS-Y PRM Rwy 16L


ILS-Y PRM Rwy 16L


CAUTION: SIMULTANEOUS CLOSE PARALLEL OPERATIONS

ATIS				SYDNEY Approach (R)				Director			
112.1 118.55 126.25 428				North 124.4		South 128.3		West 126.1		East 125.3	
SYDNEY Tower				MONITOR				Ground			
Rwy 16L/34R 124.7				Rwy 16R/34L & 07/25 120.5		PRM 133.95		West of Rwy 16R/34L 126.5		East of Rwy 16R/34L 121.7	
LOC ISS 110.9		Final Apch Crs 155^		GS D5.2 SY 1920 (1904')		ILS DA(H) 220' (204')		Apt Elev 21' Rwy 16L 16'		<div><div>2700'</div><div>MSA SY VOR 2100' within 10 NM</div></div>	
MISSED APCH: Track 155^. At MANDATORY 600', turn LEFT track 125^. Continue climb to 3000' or as directed by ATC.											
Alt Set: hPa Rwy Elev: 1 hPa Trans level: FL 110 Trans alt: 10000'											
1. SY DME REQUIRED. 2. Dual VHF communications required. 3. See 11-0 for "ILS PRM USER INSTRUCTIONS". 4. GNSS permitted in lieu of DME. Reference waypoint SY VOR. 5. ATC Approach Speeds: At 10NM from Threshold 185 - 160 KT, at 5NM from Threshold 160 - 150 KT. Advise Approach if unable to comply. 6. Holding as directed by ATC.											

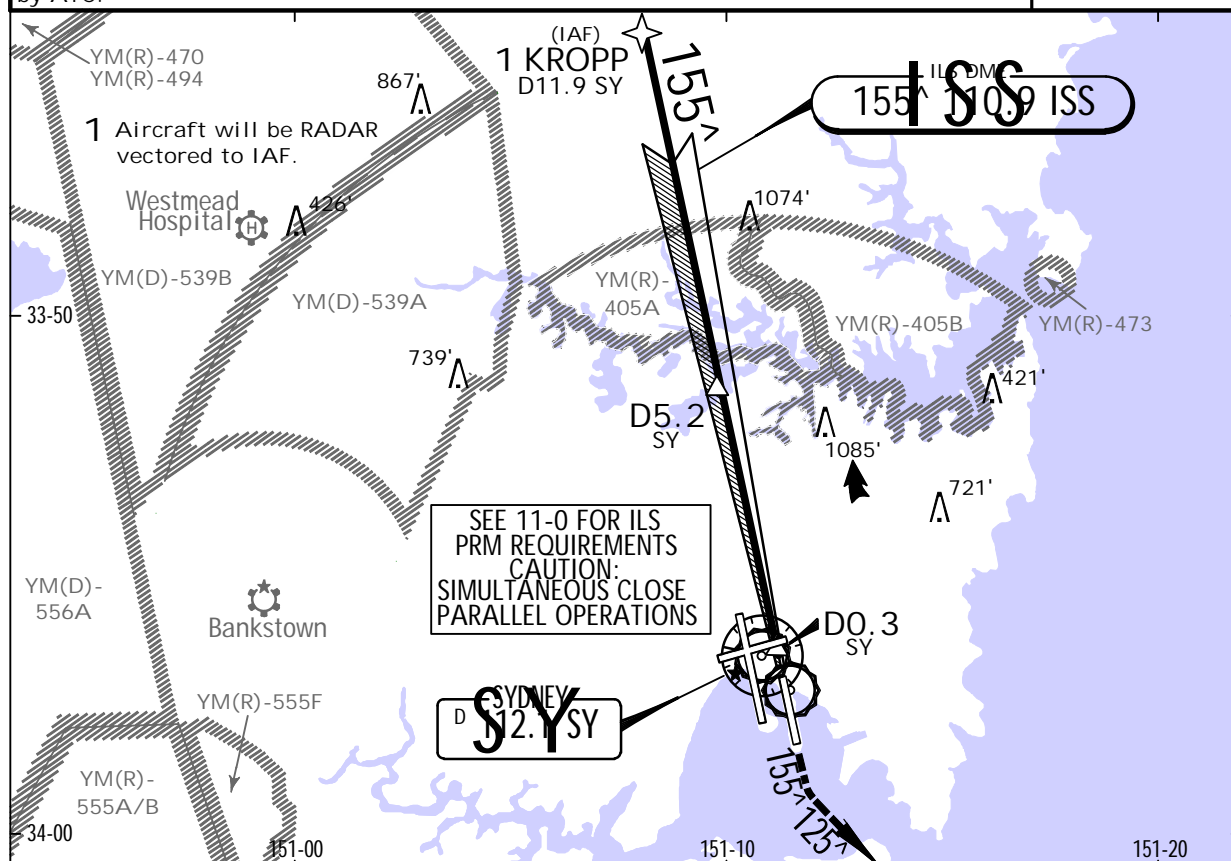

SY DME	11.8	11.0	10.0	9.0	8.0	7.0	6.0	5.2	4.0	3.0	2.0	1.0	0.3
ALTITUDE	4000'	3760'	3440'	3120'	2800'	2480'	2170'	1920'	1530'	1210'	890'	560'	220'

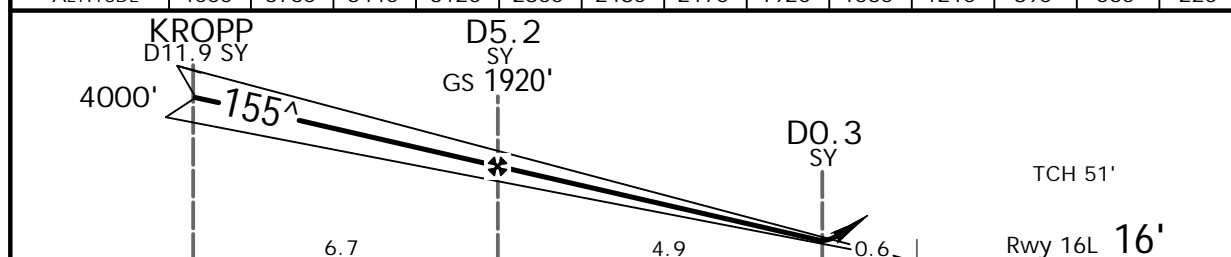[illegible]

STRAIGHT-IN LANDING RWY 16L				CIRCLE-TO-LAND		<div>No Circling </div>
DA(H) 220' (204')						
FULL		HIRL out	HALS out			
A				A		
B	RVR 550m	1.2 km	1.5 km	B	NA	
C	VIS 0.8 km			C		

YSSY/SYD


-(KINGSFORD SMITH) INTL

JEPPESSEN
15 AUG 14
Eff. 21 Aug. (11-7)


SYDNEY, NSW, AUSTRALIA
ILS-Z or LOC-Z Rwy 16R

BRIEFING STRIP™

ATIS				SYDNEY Approach (R)				Director			
112.1 118.55 126.25 428				North 124.4 South 128.3				West 126.1 East 125.3			
SYDNEY Tower				Ground							
Rwy 16R/34L & 07/25 120.5 Rwy 16L/34R 124.7				West of Rwy 16R/34L 126.5 East of Rwy 16R/34L 121.7							
LOC IKS 109.5		Final Apch Crs 155^		GS D5.3 IKS 1700' (1692')		ILS DA(H) 210' (202')		Apt Elev 21' Rwy 16R 8'		<div>2700'</div> <div>MSA SY VOR 2100' within 10 NM</div>	
MISSED APCH: Track 155^, at MANDATORY 600', turn RIGHT track 170^.											
Climb to 3000' or as directed by ATC.											
Alt Set: hPa Rwy Elev: 0 hPa Trans level: FL 110 Trans alt: 10000'											
1. IKS DME (LOC ONLY) REQUIRED. 2. ATC Approach Speeds: At 10NM from Threshold 185 - 160 KT, at 5NM from Threshold 160 - 150 KT. Advise Approach if unable to comply. 3. Holding as advised by ATC.											

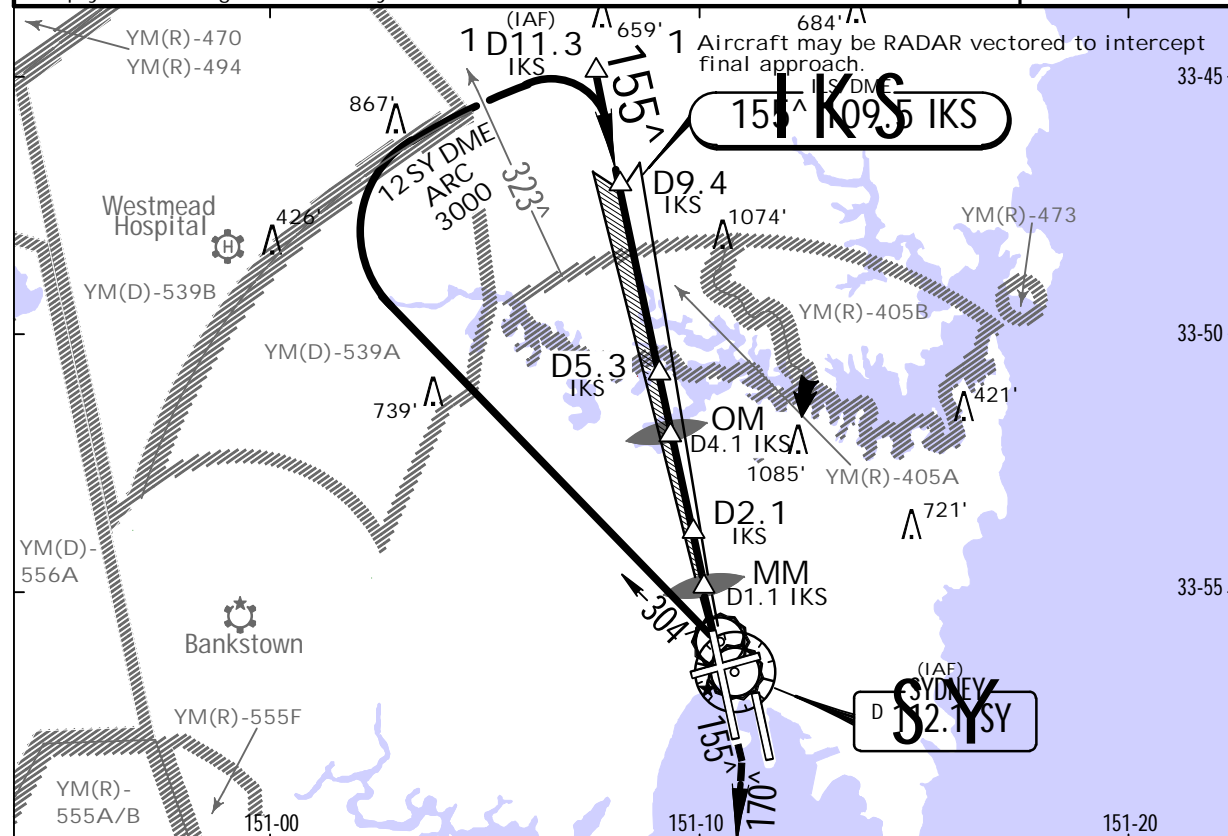

LOC (GS out)	IKS DME	9.4	9.0	8.0	7.0	6.0	5.3	5.0	4.1	4.0	3.0	2.0	1.4
	ALTITUDE	3000'	2870'	2560'	2240'	1920'	1700'	1600'	1310'	1280'	960'	640'	450'

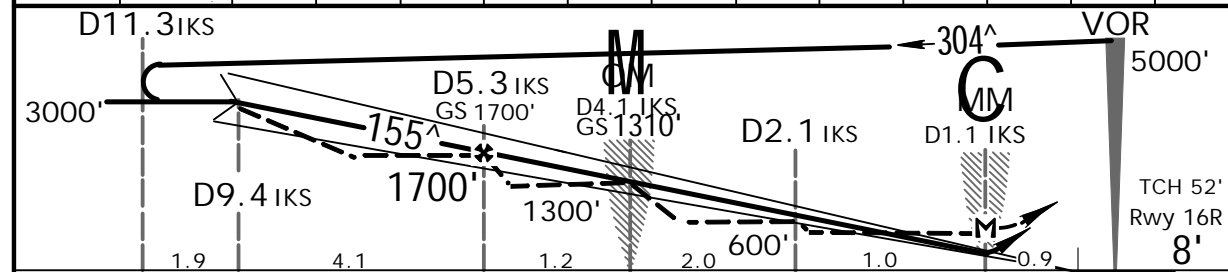

Gnd speed-Kts	70	90	100	120	140	160	ALSIF-II	MANDATORY	170^	3000'
GS	3.00^	372	478	531	637	849	PAPI	155^	600'	RT
MAP at MM/D1.1 IKS										

STRAIGHT-IN LANDING RWY16R						CIRCLE-TO-LAND		<div>No Circling Beyond D3.0 SY VOR East of Rwy 16R & North of Rwy 25</div>
ILS DA(H) 210' (202')			LOC (GS out) DME MDA(H) 460' (452')			MDA(H)		
FULL		HIRL out	HIALS out	HIALS out		Max Kts		
A	RVR 550m VIS 0.8 km	1.2 km	1.5 km	1.7 km	2.6 km	100	710' (689')-2.4 km	
B						135		
C						180	1000' (979')-4.0 km	
D						205	1000' (979')-5.0 km	

YSSY/SYD



-(KINGSFORD SMITH) INTL

JEPPESSEN
15 AUG 14
Eff. 21 Aug. (11-7A)

SYDNEY, NSW, AUSTRALIA
ILS-Z Rwy 16R CAT II

BRIEFING STRIP

ATIS				SYDNEY Approach (R)				Director			
112.1	118.55	126.25	428	North	124.4	South	128.3	West	126.1	East	125.3
SYDNEY Tower						Ground					
Rwy 16R/34L & 07/25		120.5	Rwy 16L/34R		124.7	West of Rwy 16R/34L		126.5	East of Rwy 16R/34L		121.7
LOC IKS 109.5		Final Apch Crs 155^		GS D5.3 IKS 1700' (1692')		CAT II ILS RA 101' DA(H) 108' (100')		Apt Elev 21'		Rwy 16R 8'	
MISSED APCH: Track 155^, at MANDATORY 600', turn RIGHT track 170^. Climb to 3000' or as directed by ATC.										<div>2700'</div>	
Alt Set: hPa Rwy Elev: 0 hPa Trans level: FL 110 Trans alt: 10000'											
1. SPECIAL AIRCREW AND AIRCRAFT CERTIFICATION REQUIRED. 2. IKS DME REQUIRED. 3. ATC Approach Speeds: At 10NM from Threshold 185 - 160 KT, at 5NM from Threshold 160 - 150 KT. Advise Approach if unable to comply. 4. Holding as advised by ATC.											
MSA SY VOR 2100' within 10 NM											

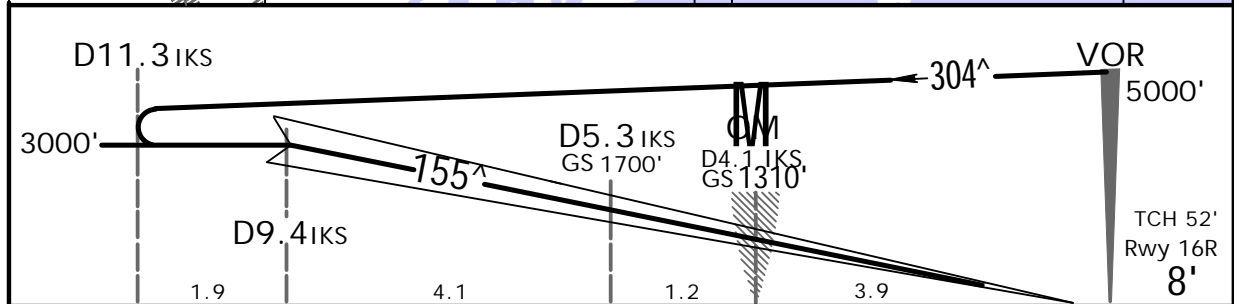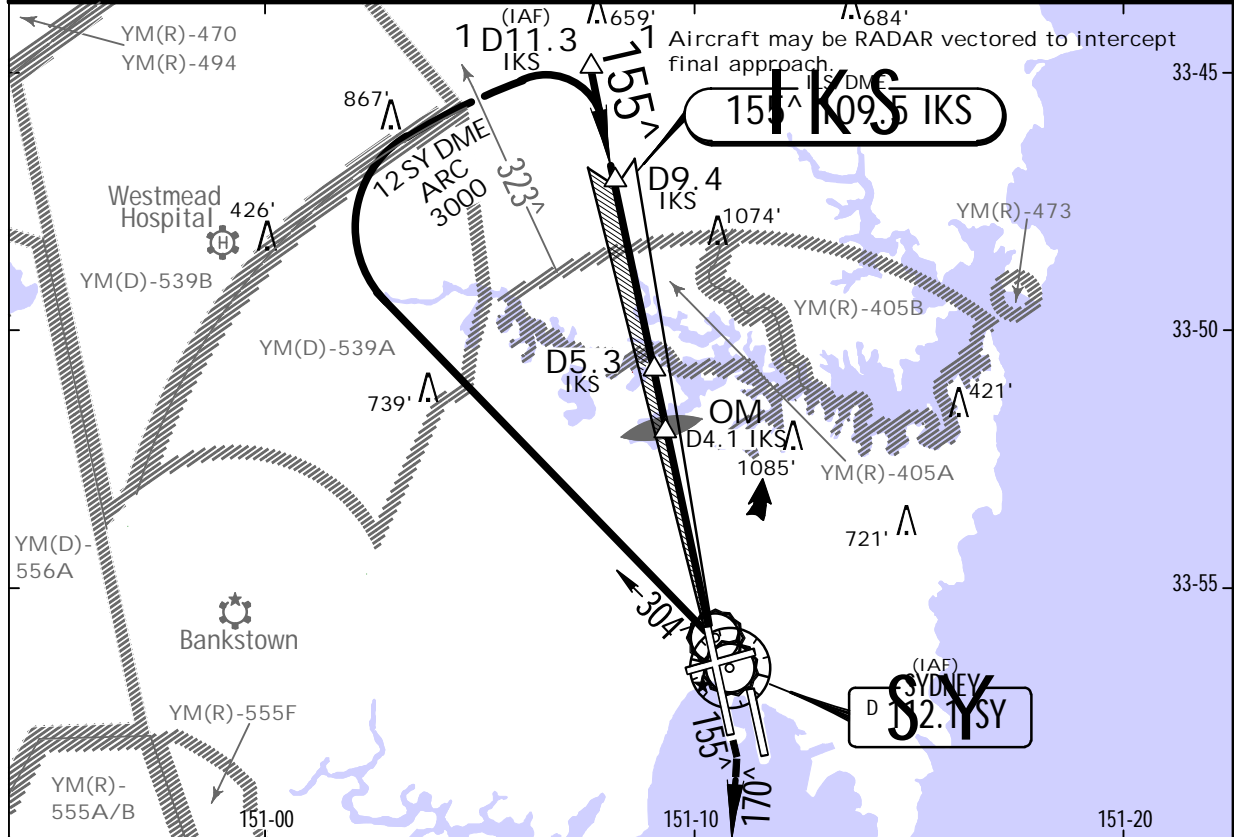

Gnd speed-Kts	70	90	100	120	140	160	ALSIF-II	MANDATORY	170^	3000'
GS	3.00^	372	478	531	637	743	PAPI	600'	RT	

STRAIGHT-IN LANDING RWY 16R
CAT II ILS
RA 101'
DA(H) 108' (100')

NS OPS

RVR 350m

YSSY/SYD

-(KINGSFORD SMITH) INTL

4 JUL 14

JEPPESEN

SYDNEY, NSW, AUSTRALIA

11-8A ILS-Z PRM Rwy 16R CAT II


CAUTION: SIMULTANEOUS CLOSE PARALLEL OPERATIONS

BRIEFING STRIP


SYDNEY TOWER

ATIS				SYDNEY Approach (R)				Director							
112.1		118.55		126.25		428		North 124.4		South 128.3		West 126.1		East 125.3	
SYDNEY Tower								MONITOR				Ground			
Rwy 16R/34L & 07/25		120.5		Rwy 16L/34R		124.7		PRM 119.45				West of Rwy 16R/34L 126.5		East of Rwy 16R/34L 121.7	
LOC IKS 109.5		Final Apch Crs 155^		GS OM 1310'		(1302')		CAT II ILS RA 101' DA(H) 108' (100')				Apt Elev 21' Rwy 16R 8'		<div>2700'</div>	
MISSED APCH: Track 155^, at MANDATORY 600' turn RIGHT, track 170^. Continue climb to 3000' or as directed by ATC.															
Alt Set: hPa Rwy Elev: 0 hPa Trans level: FL 110 Trans alt: 10000'															
1. SPECIAL AIRCREW AND AIRCRAFT CERTIFICATION REQUIRED. 2. Dual VHF communications required. 3. See 11-0 for "ILS PRM USER INSTRUCTIONS". 4. ATC Approach Speeds: At CATHY 185 - 160 KT, at 5NM from Threshold 160 - 150 KT. Advise Approach if unable to comply. 5. Holding as advised by ATC.															

MSA SY VOR
2100'
within 10 NM

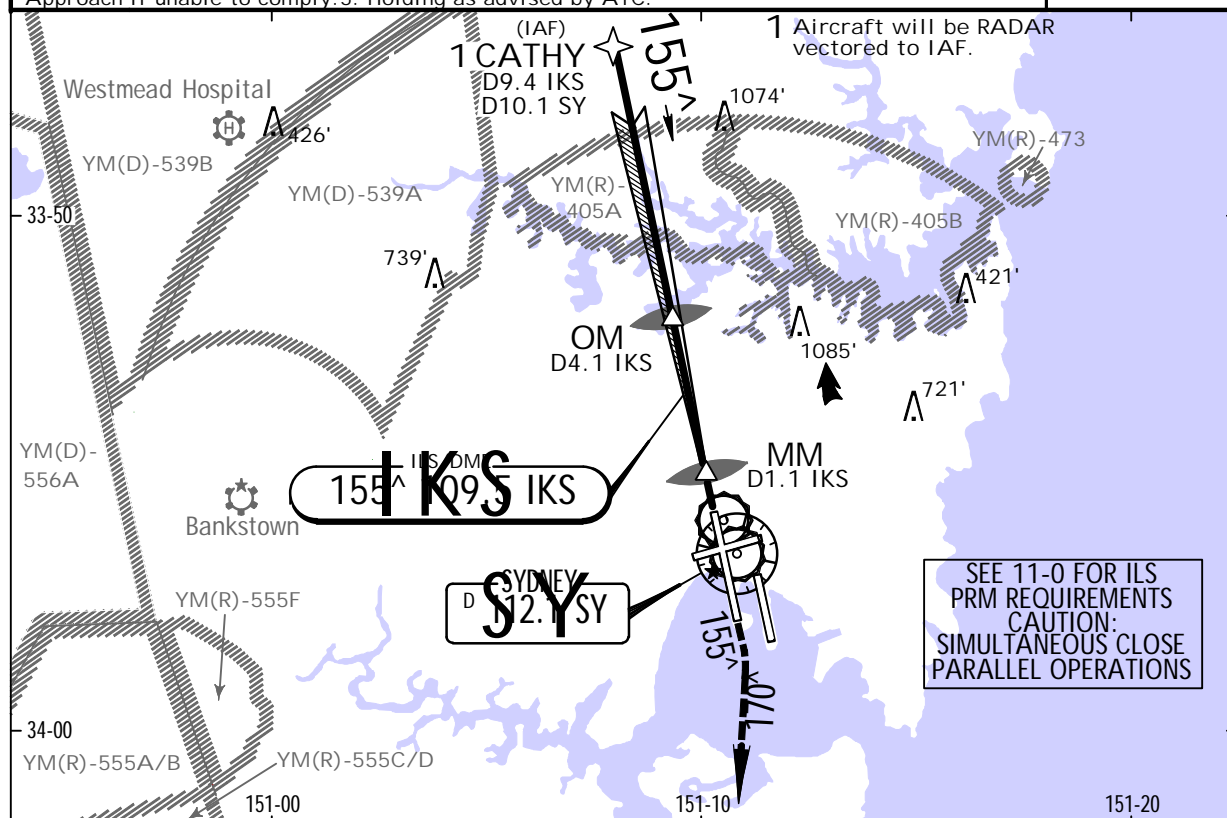

IKS DME	9.4	9.0	8.0	7.0	6.0	5.0	4.1	4.0	3.0	2.0	1.1	1.0	0.7
ALTITUDE	3000'	2870'	2560'	2240'	1920'	1600'	1310'	1280'	960'	640'	350'	330'	210'

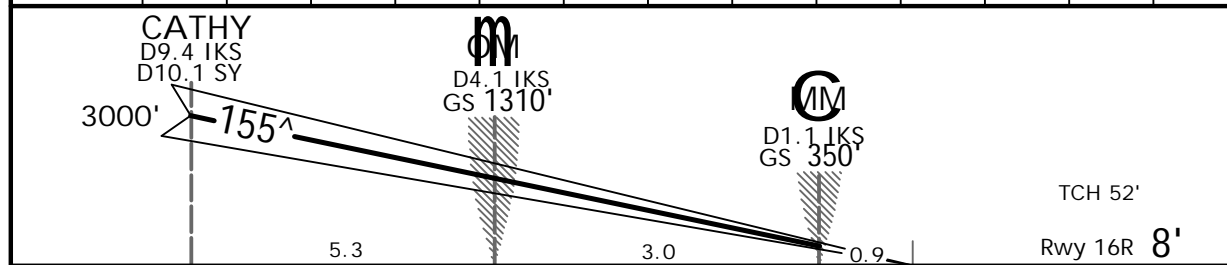

Gnd speed-Kts	70	90	100	120	140	160	ALSIF-II PAPI	155^	MANDATORY 600'	170^ RT	3000'
GS	3.00^	372	478	531	637	743	849				

STRAIGHT-IN LANDING RWY 16R
CAT II ILS
RA 101'
DA(H) 108' (100')

NS OPS

RVR 350m

YSSY/SYD


-(KINGSFORD SMITH) INTL

18 JUL 14 (11-9)


SYDNEY, NSW, AUSTRALIA
ILS-Y or LOC-Y Rwy 16R

BRIEFING STRIP


ATIS				SYDNEY Approach (R)				Director		
112.1 118.55 126.25 428				North 124.4 South 128.3		West 126.1 East 125.3				
SYDNEY Tower				Ground						
Rwy 16R/34L & 07/25 120.5 Rwy 16L/34R 124.7				West of Rwy 16R/34L 126.5 East of Rwy 16R/34L 121.7						
LOC IKS 109.5		Final Apch Crs 155^		GS D6.0 SY 1700' (1692')		ILS DA(H) 210' (202')		Apt Elev 21' Rwy 16R 8'		
MISSED APCH: Track 155^, at MANDATORY 600', turn RIGHT track 170^. Climb to 3000' or as directed by ATC.									<div>2700'</div>	
Alt Set: hPa Rwy Elev: 0 hPa Trans level: FL 110 Trans alt: 10000' 1. SY DME (LOC ONLY) REQUIRED. 2. GNSS permitted in lieu of DME. Reference waypoint SY VOR. 3. ATC Approach Speeds: At 10NM from THR 185 - 160 KT, at 5NM from THR 160 - 150 KT. Advise APP if unable to comply. 4. Holding as advised by ATC.										
MSA SY VOR 2100' within 10 NM										

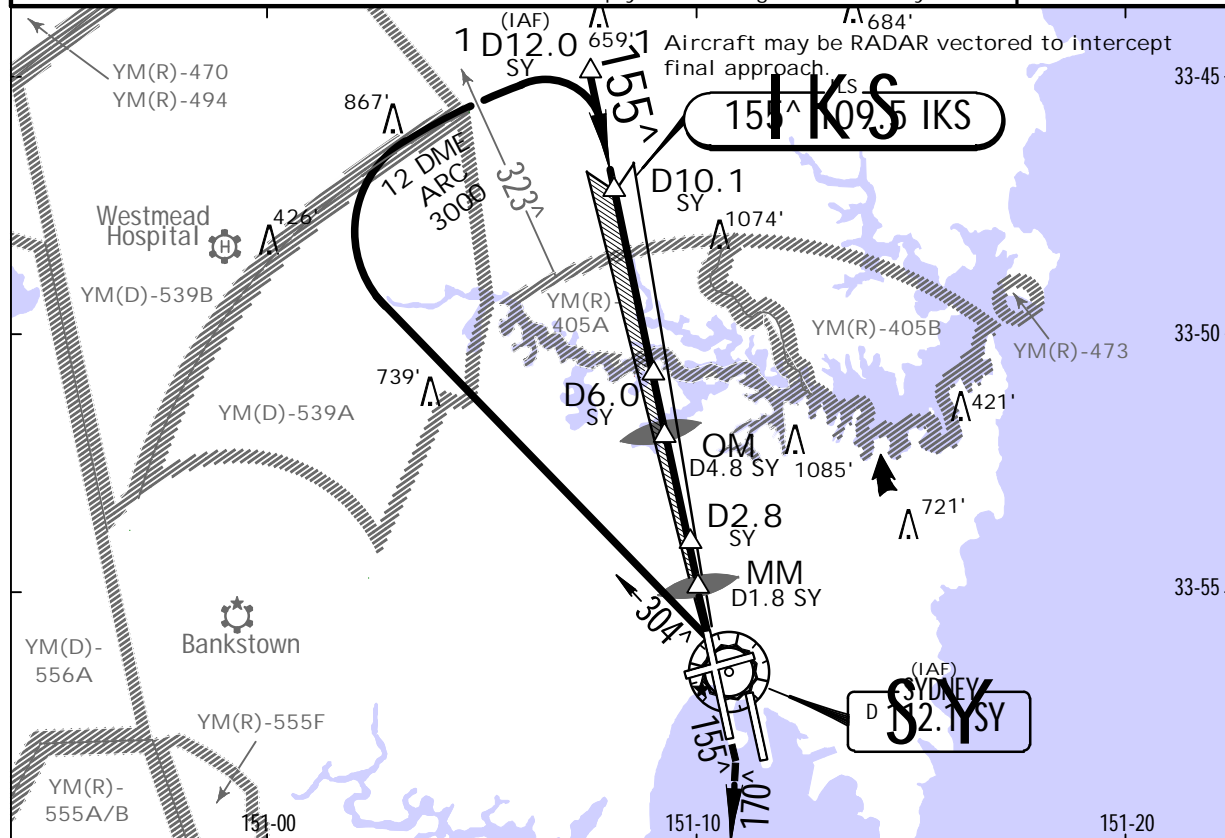

LOC (GS out)	SY DME	10.1	10.0	9.0	8.0	7.0	6.0	5.0	4.8	4.0	3.0	2.1
	ALTITUDE	3000'	2970'	2650'	2340'	2020'	1700'	1380'	1310'	1060'	740'	450'

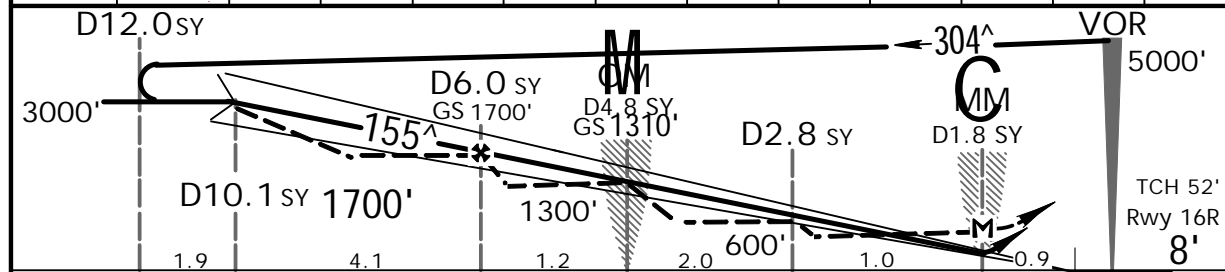

Gnd speed-Kts	70	90	100	120	140	160	ALSIF-II	MANDATORY	170^	3000'
GS	3.00^	372	478	531	637	743	PAPI	155^	600'	RT
MAP at MM/D1.8 SY										

STRAIGHT-IN LANDING RWY16R						CIRCLE-TO-LAND		<div>No Circling Beyond D3.0 SY VOR East of Rwy 16R & North of Rwy 25</div> 
ILS DA(H) 210' (202')			LOC (GS out) DME MDA(H) 460' (452')					
FULL		HIRL out	HIALS out			MDA(H)		
A	RVR 550m VIS 0.8 km	1.2 km	1.5 km	1.7 km	2.6 km	Max Kts		
B						100	710' (689')-2.4 km	
C						135	1000' (979')-4.0 km	
D						180	1000' (979')-5.0 km	
						205		

NS OPS


YSSY/SYD

-(KINGSFORD SMITH) INTL

18 JUL 14 (11-10)

CAUTION: SIMULTANEOUS CLOSE PARALLEL OPERATIONS

SYDNEY, NSW, AUSTRALIA
ILS-Y PRM Rwy 16R

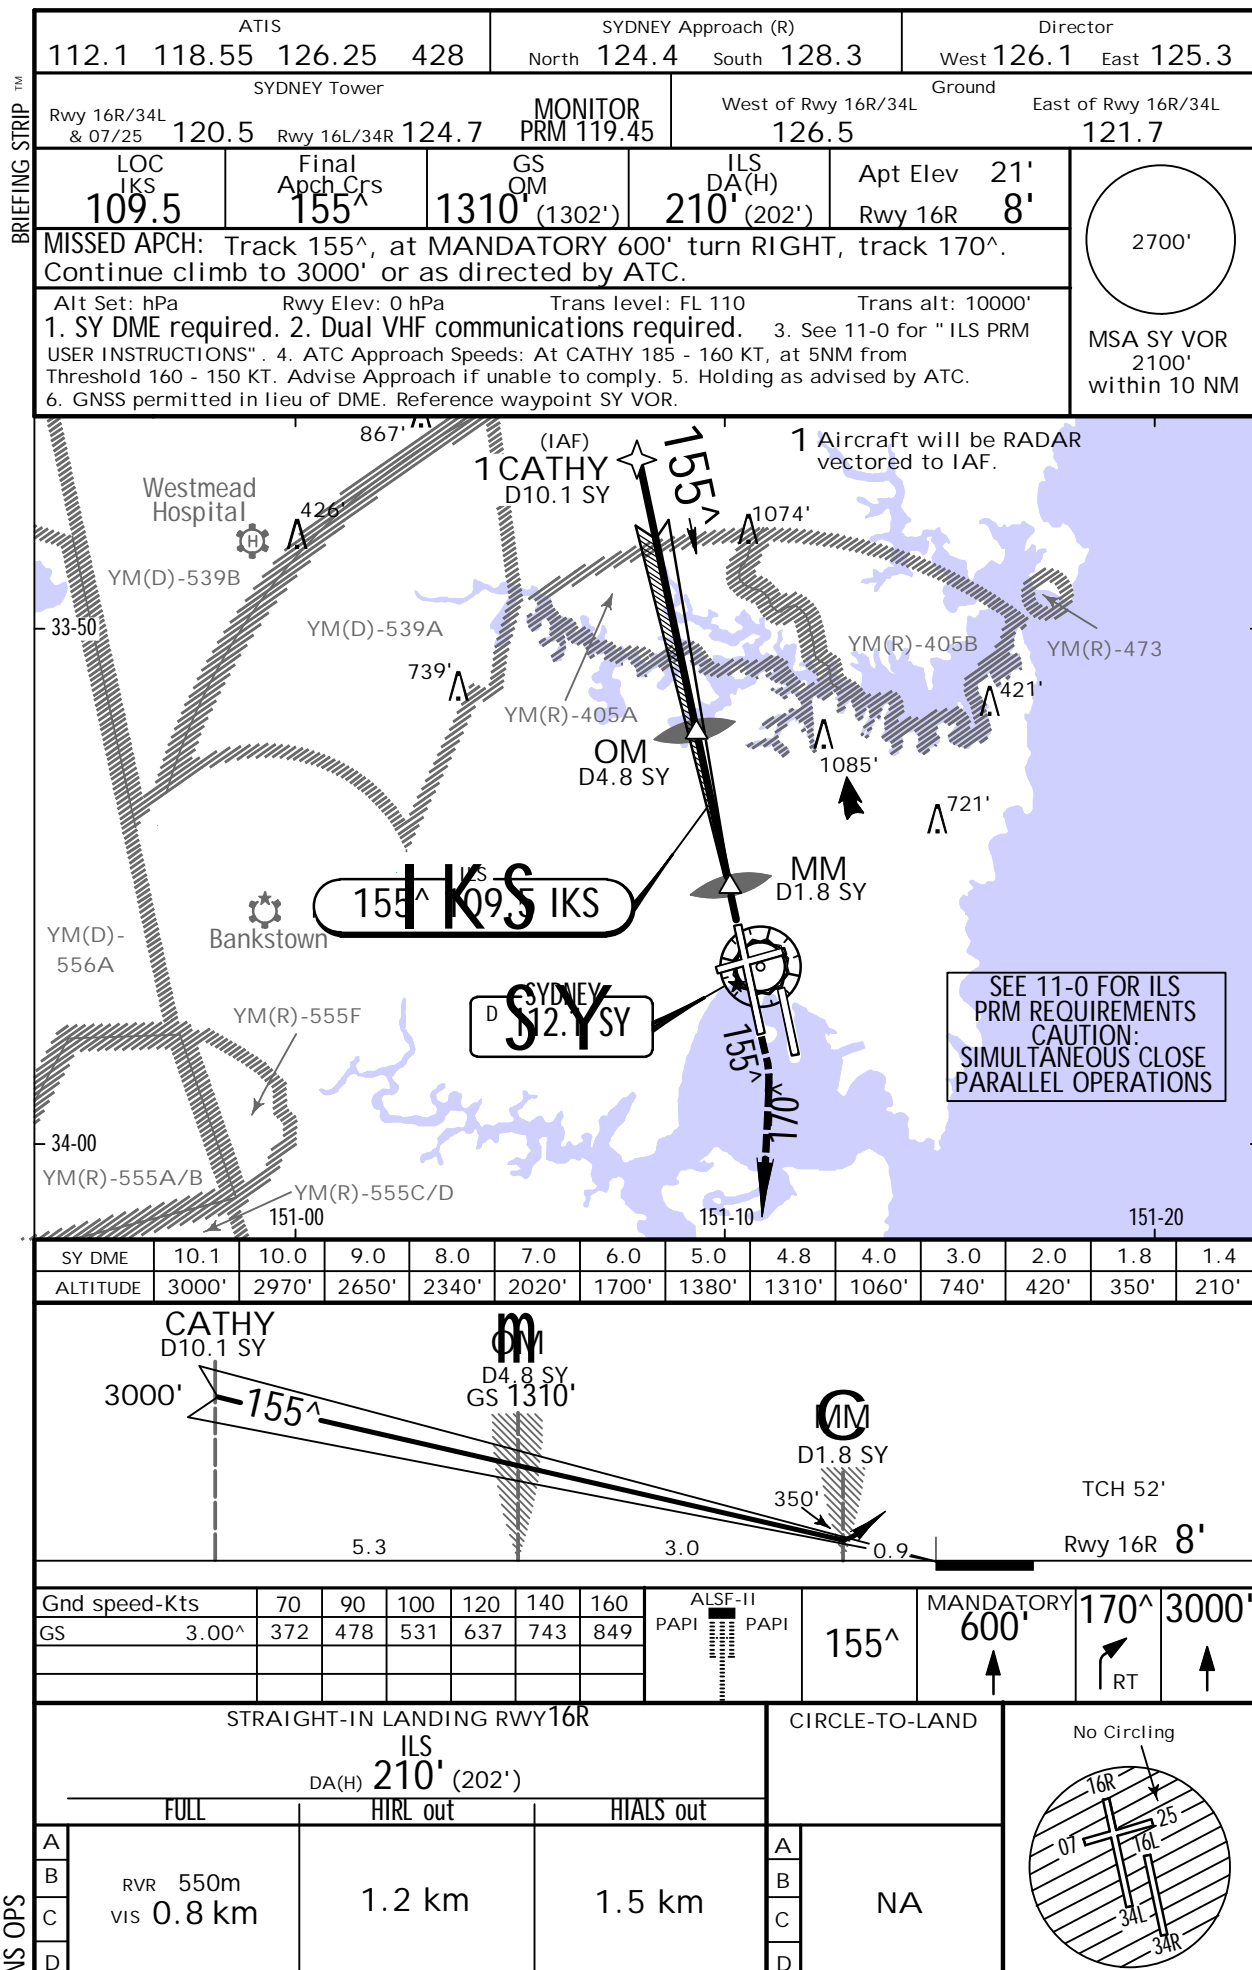

YSSY/SYD

-(KINGSFORD SMITH) INTL

4 JUL 14


(11-11)

JEPPESEN


SYDNEY, NSW, AUSTRALIA
ILS or LOC Rwy 25

BRIEFING STRIP™

ATIS 112.1 118.55 126.25 428				SYDNEY Approach (R) North 124.4 South 128.3		Director West 126.1 East 125.3	
SYDNEY Tower Rwy 16R/34L & 07/25 120.5 Rwy 16L/34R 124.7				Ground West of Rwy 16R/34L 126.5 East of Rwy 16R/34L 121.7			
LOC ISW 109.7	Final Apch Crs 242^	GS D5.0 ISW 1610' (1590')	ILS DA(H) 270' (250')	Apt Elev 21' Rwy 25 20'	<div>2700'</div>		
MISSED APCH: Track 242^. Climb to 3000' or as directed by ATC.							
Alt Set: hPa Rwy Elev: 1 hPa Trans level: FL 110 Trans alt: 10000' 1. ISW DME REQUIRED. 2. ATC Approach Speeds: At JELLI 185 - 160 KT, at 5NM from THR 160 - 150 KT. Advise Approach if unable to comply. 3. Holding as directed by ATC.							
						MSA SY VOR 2100' within 10 NM	

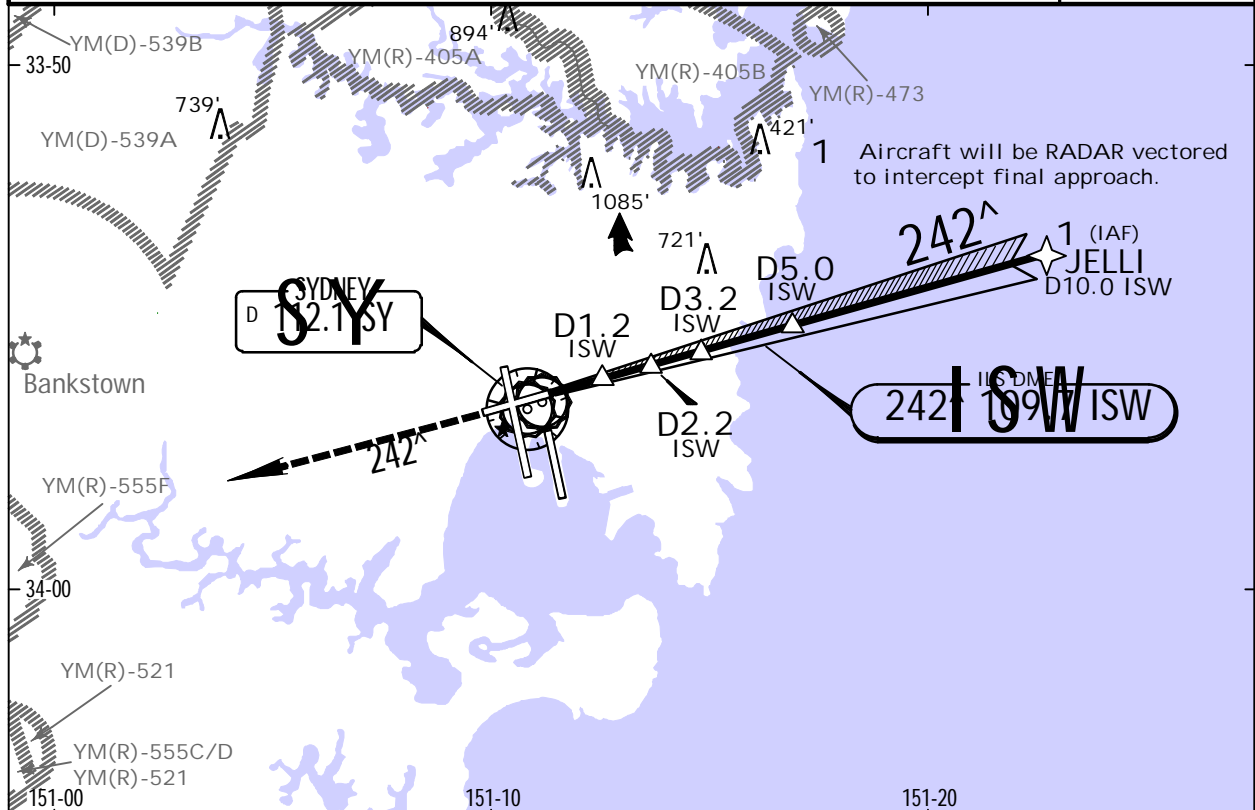


LOC (GS out)	ISW DME	1.8	2.0	2.2	3.0	3.2	4.0	5.0	6.0	7.0	8.0	9.0	9.4
	ALTITUDE	580'	650'	710'	970'	1030'	1290'	1610'	1920'	2240'	2560'	2880'	3000'

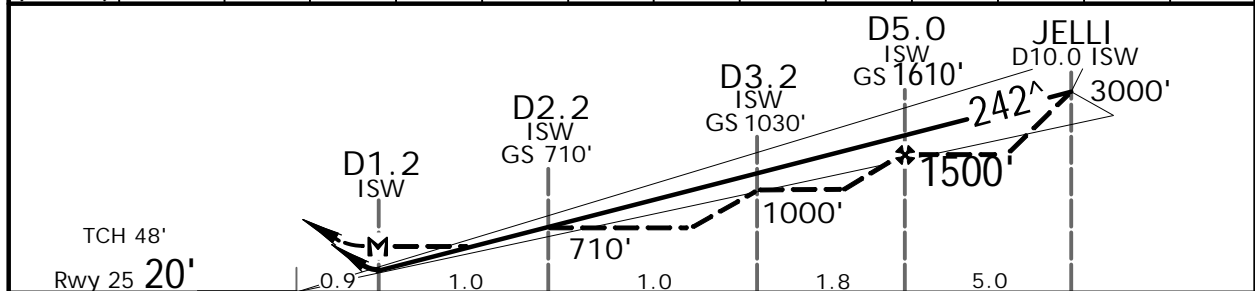

Gnd Speed-Kts	70	90	100	120	140	160		PAPI	242 [^]	3000' ↑
GS 3.00 [^]	372	478	531	637	743	849				
MAP at D1.2 ISW										

STRAIGHT-IN LANDING RWY 25			CIRCLE-TO-LAND		
ILS DME DA(H) 270' (250')		LOC (GS out) DME MDA(H) 580' (560')	Max Kts. MDA(H)		
1.5 km		3.2 km	100 135 180 205	710' (689') - 2.4 km	
				1000' (979') - 4.0 km	
				1000' (979') - 5.0 km	
				No Circling Beyond D3.0 SY East of Rwy 16R & North of Rwy 25	



YSSY/SYD

-(KINGSFORD SMITH) INTL


4 JUL 14

(11-12)


SYDNEY, NSW, AUSTRALIA
ILS-Z or LOC-Z Rwy 34L

BRIEFING STRIP™


ATIS 112.1 118.55 126.25 428				SYDNEY Approach (R) North 124.4 South 128.3				Director West 126.1 East 125.3			
SYDNEY Tower Rwy 16R/34L & Rwy 07/25 120.5 Rwy 16L/34R 124.7						Ground West of Rwy 16R/34L 126.5 East of Rwy 16R/34L 121.7					
LOC ISN 110.1		Final Apch Crs 335^		GS OM 1290' (1276')		ILS DA(H) 220' (206')		Apt Elev 21' Rwy 34L 14'		<div>2700'</div> <div>MSA SY VOR 2100' within 10 NM</div>	
MISSED APCH: Track 335^. At MANDATORY 500' turn LEFT track 320^. Climb to 3000' or as directed by ATC.											
Alt Set: hPa Rwy Elev: 1 hPa Trans level: FL 110 Trans alt: 10000'											
1. ISN DME REQUIRED. 2. ATC Approach Speeds: At 10NM from Threshold 185 - 160 KT, at 5NM from Threshold 160 - 150 KT. Advise Approach if unable to comply. 3. Holding as directed by ATC.											

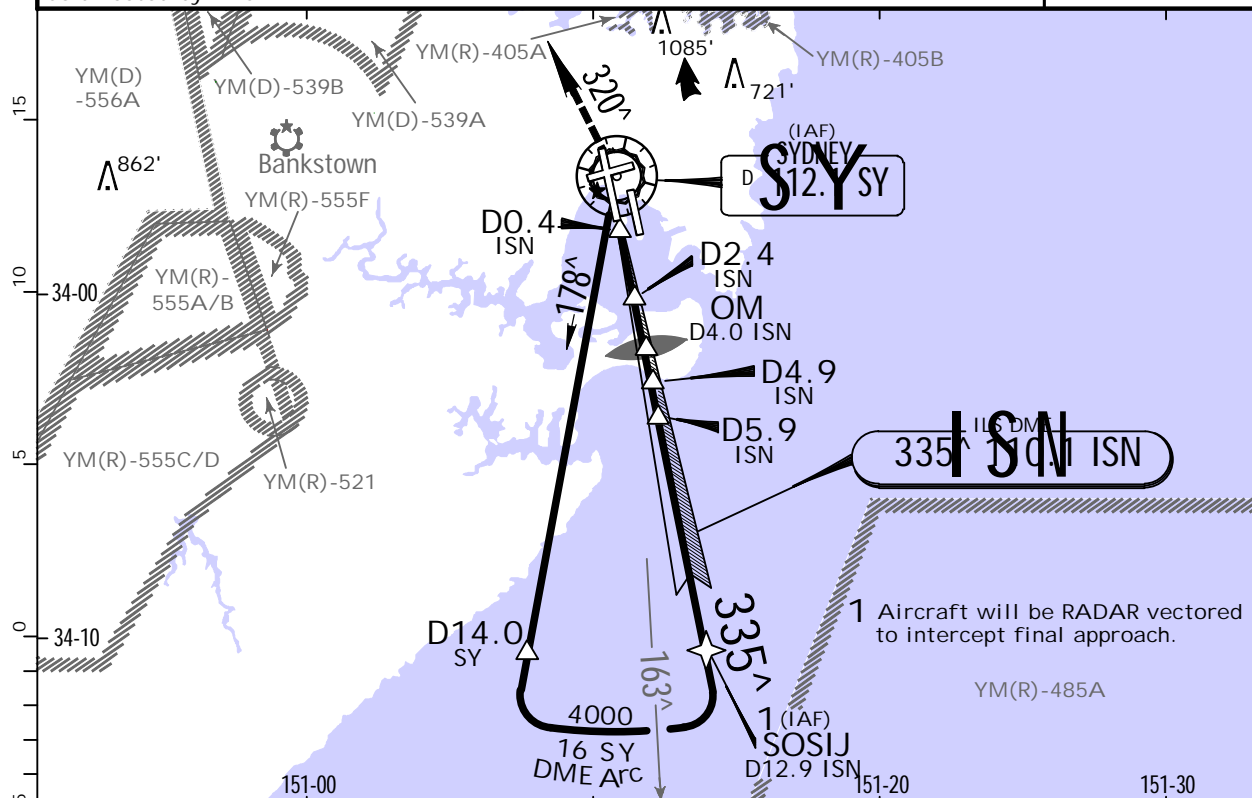


LOC (GS out)	ISN DME	1.2	2.0	2.4	3.0	4.0	4.9	5.0	5.9	6.0	7.0	8.0	10.0	11.0	12.0	12.5
ALTITUDE	400'	650'	780'	970'	1290'	1580'	1610'	1900'	1930'	2240'	2560'	3200'	3520'	3840'	4000'	

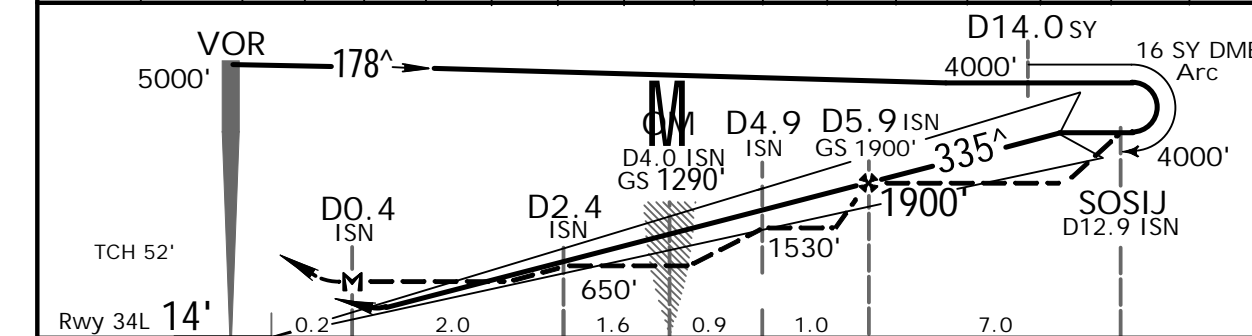

Gnd speed-Kts	70	90	100	120	140	160	ALSIF-II	MANDATORY	320^	3000'
GS	3.00^	372	478	531	637	743	PAPI	335^	500'	320^
MAP at D0.4 ISN										

STRAIGHT-IN LANDING RWY 34L						CIRCLE-TO-LAND		<div>No Circling Beyond D3.0 SY East of Rwy 16R & North of Rwy 25</div> 
ILS DME DA(H) 220' (206')				LOC (GS out) DME MDA(H) 400' (386')				
FULL				HIRL out		HIRLS out		
FULL				HIRL out		HIRLS out		
A						Max Kts	MDA(H)	
B	RVR 800m	1.2	1.5	1.7	2.6	100	710' (689') -2.4 km	
C	VIS 0.8 km	km	km	km	km	135	1000' (979') -4.0 km	
						180		



YSSY/SYD


-(KINGSFORD SMITH) INTL

4 JUL 14 11-12A


SYDNEY, NSW, AUSTRALIA
ILS-Z Rwy 34L CAT II

BRIEFING STRIP™

ATIS 112.1 118.55 126.25 428				SYDNEY Approach (R) North 124.4 South 128.3				Director West 126.1 East 125.3			
SYDNEY Tower Rwy 16R/34L & Rwy 07/25 120.5 Rwy 16L/34R 124.7				Ground West of Rwy 16R/34L 126.5 East of Rwy 16R/34L 121.7							
LOC ISN 110.1		Final Apch Crs 335^		GS OM 1290' (1276')		CAT II ILS RA 101' DA(H) 114' (100')		Apt Elev 21' Rwy 34L 14'		<div>2700'</div> <div>MSA SY VOR 2100' within 10 NM</div>	
MISSED APCH: Track 335^. At MANDATORY 500' turn LEFT track 320^. Climb to 3000' or as directed by ATC.											
Alt Set: hPa Rwy Elev: 1 hPa Trans level: FL 110 Trans alt: 10000' 1. SPECIAL AIRCREW & ACFT CERTIFICATION REQUIRED. 2. ISN DME REQUIRED. 3. ATC Approach Speeds: At 10NM from Threshold 185 - 160 KT, at 5NM from Threshold 160 - 150 KT. Advise Approach if unable to comply. 4. Holding as directed by ATC.											

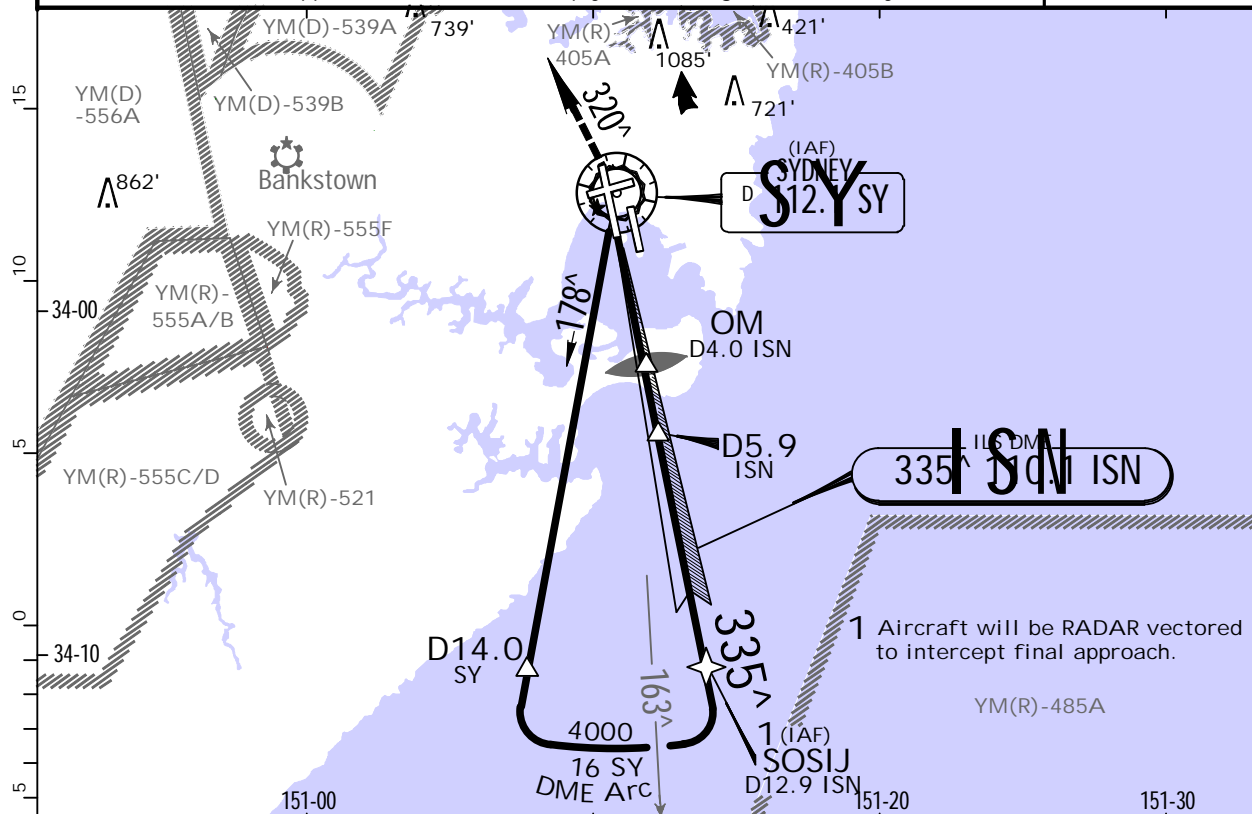

LOC (GS out)	ISN DME	1.2	2.0	2.4	3.0	4.0	4.9	5.0	5.9	6.0	7.0	8.0	10.0	11.0	12.0	12.5
	ALTITUDE	400'	650'	780'	970'	1290'	1580'	1610'	1900'	1930'	2240'	2560'	3200'	3520'	3840'	4000'

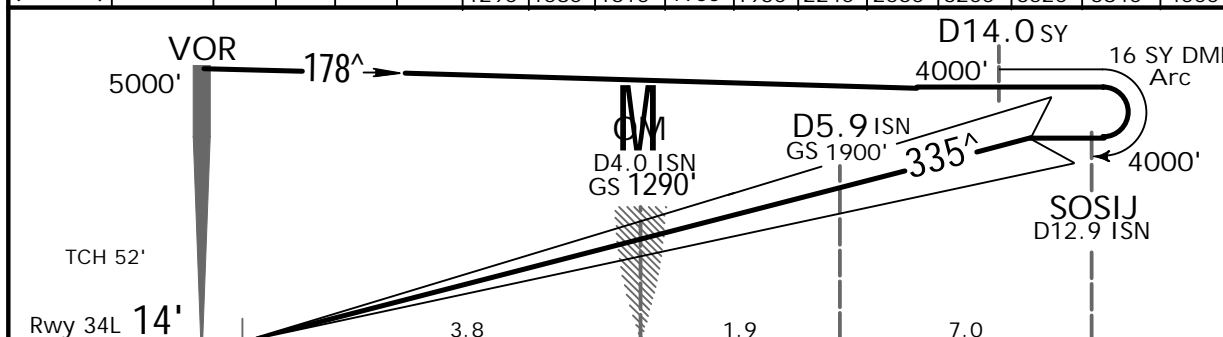

Gnd speed-Kts	70	90	100	120	140	160	ALSF-II	MANDATORY	320^	3000'
GS	3.00^	372	478	531	637	743	PAPI	500'	LT	
							PAPI	335^		

STRAIGHT-IN LANDING RWY 34L
CAT II ILS
RA 101'
DA(H) 114' (100')

VS OPS

RVR 350m

YSSY/SYD

JEPPesen SYDNEY, NSW, AUSTRALIA
4 JUL 14 11-13 ILS-Z PRM Rwy 34L

-(KINGSFORD SMITH) INTL


4 JUL 14

11-13


ILS-Z PRM Rwy 34L



CAUTION: SIMULTANEOUS CLOSE PARALLEL OPERATIONS

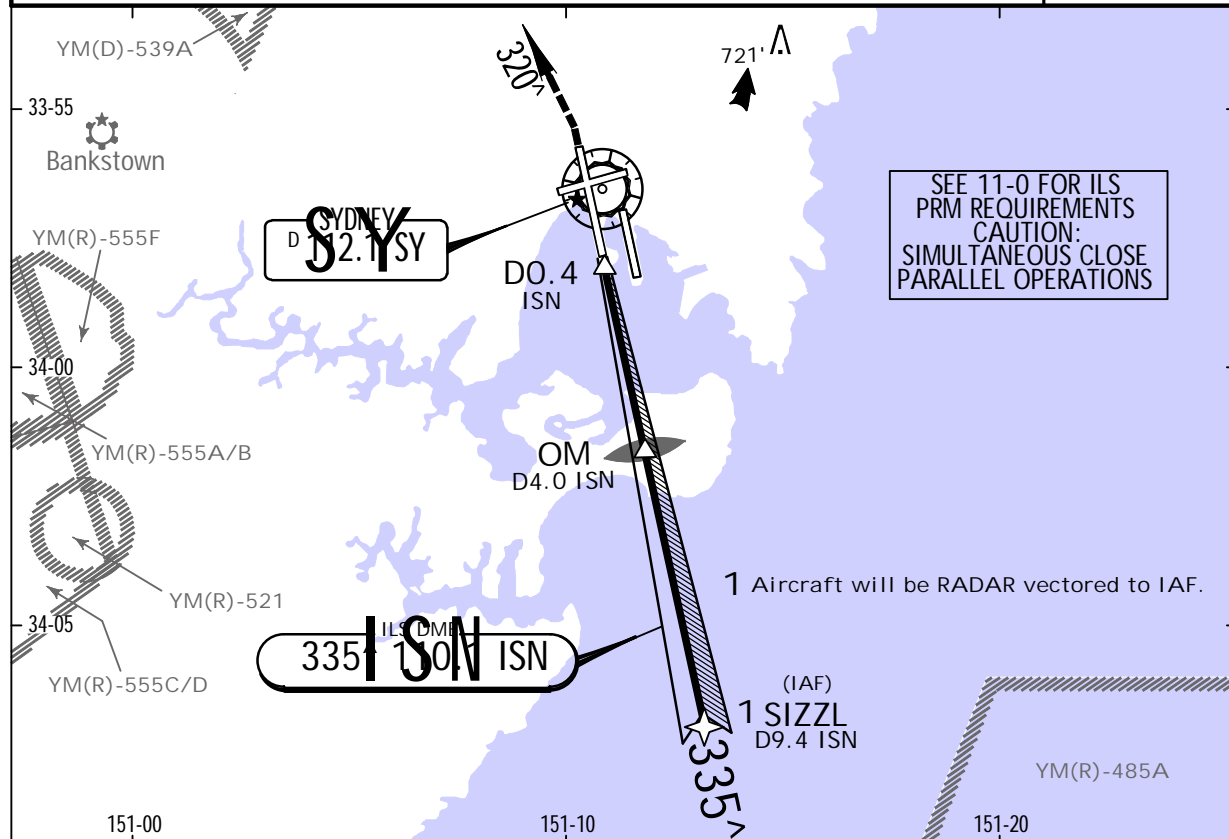
BRIEFING STRIP™	ATIS 112.1 118.55 126.25 428				SYDNEY Approach (R) North 124.4 South 128.3				Director West 126.1 East 125.3			
	SYDNEY Tower Rwy 16R/34L & Rwy 07/25 120.5 Rwy 16L/34R 124.7				MONITOR PRM 119.45				Ground West of Rwy 16R/34L 126.5 East of Rwy 16R/34L 121.7			
	LOC ISN 110.1		Final Apch Crs 335^		GS OM 1290' (1276')		ILS DA(H) 220' (206')		Apt Elev 21' Rwy 34L 14'		<div><div>2700'</div><div>MSA SY VOR 2100' within 10 NM</div></div>	
	MISSED APCH: Track 335^ . At MANDATORY 500' turn LEFT track 320^ . Climb to 3000' or as directed by ATC.											
	Alt Set: hPa Rwy Elev: 1 hPa Trans level: FL 110 Trans alt: 10000' 1. ISN DME REQUIRED. 2. Dual VHF communications required. 3. See 11-0 for " ILS PRM USER INSTRUCTIONS" . 4. ATC Approach Speeds: At SIZL 185 - 160 KT, at 5NM from Threshold 160 - 150 KT. Advise Approach if unable to comply. 5. Holding as directed by ATC.											

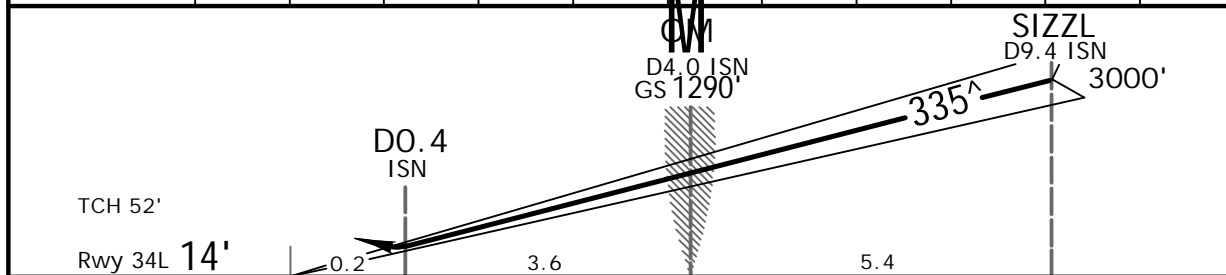

ISN DME	0.7	1.0	2.0	3.0	4.0	5.0	6.0	7.0	8.0	9.0	9.4
ALTITUDE	220'	330'	650'	970'	1290'	1610'	1930'	2240'	2560'	2880'	3000'



Gnd speed-Kts	70	90	100	120	140	160		335 [^]	MANDATORY 500' ↑		320 [^] LT	3000' ↑
GS 3.00 [^]	372	478	531	637	743	849						

STRAIGHT-IN LANDING RWY 34L				CIRCLE-TO-LAND		<div>No Circling</div> 
ILS DME						
DA(H) 220' (206')						
FULL		HIRL out	HALS out			
A				A		
B	RVR 800m	1.2 km	1.5 km	B	NOT AUTHORIZED	
C	VIS 0.8 km			C		

YSSY/SYD



JEPPESSEN

SYDNEY, NSW, AUSTRALIA

-(KINGSFORD SMITH) INTL

4 JUL 14


(11-13A)

ILS-Z PRM Rwy 34L CAT II


CAUTION: SIMULTANEOUS CLOSE PARALLEL OPERATIONS

BRIEFING STRIP

ATIS 112.1 118.55 126.25 428				SYDNEY Approach (R) North 124.4 South 128.3		Director West 126.1 East 125.3	
SYDNEY Tower Rwy 16R/34L & Rwy 07/25 120.5		MONITOR PRM 119.45		Ground West of Rwy 16R/34L 126.5 East of Rwy 16R/34L 121.7			
LOC ISN 110.1	Final Apch Crs 335^	GS OM 1290' (1276')	CAT II RA 101' DA(H) 114' (100')	Apt Elev 21' Rwy 34L 14'		<div>2700'</div>	
MISSED APCH: Track 335^. At MANDATORY 500' turn LEFT track 320^. Climb to 3000' or as directed by ATC.							
Alt Set: hPa Rwy Elev: 1 hPa Trans level: FL 110 Trans alt: 10000'							
1. SPECIAL AIRCREW & ACFT CERTIFICATION REQUIRED. 2. ISN DME REQUIRED. 3. DUAL VHF COMMUNICATIONS REQUIRED. 4. See 11-0 for " ILS PRM USER INSTRUCTIONS" . 5. ATC Approach Speeds: At SIZZL 185 - 160 KT, at 5NM from Threshold 160 - 150 KT. Advise Approach if unable to comply. 6. Holding as directed by ATC.							
						MSA SY VOR 2100' within 10 NM	

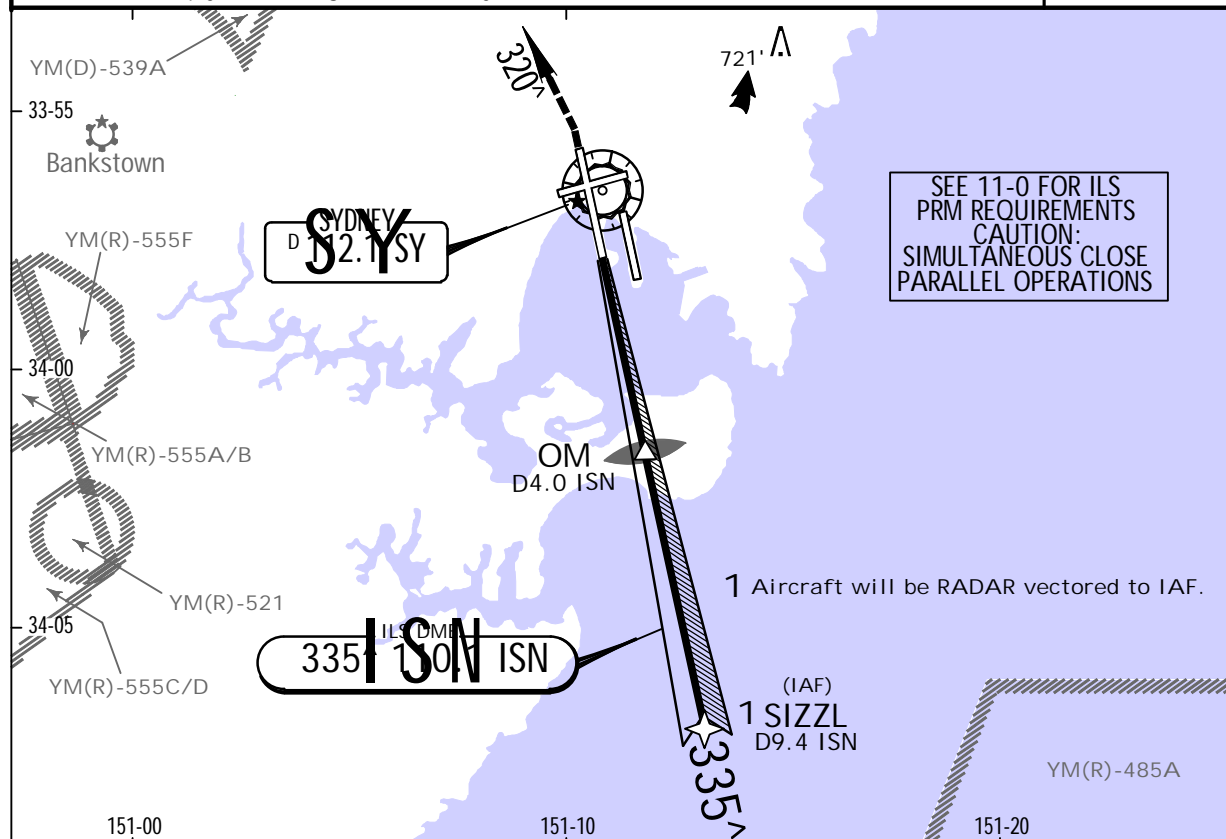

ISN DME	0.7	1.0	2.0	3.0	4.0	5.0	6.0	7.0	8.0	9.0	9.4
ALTITUDE	220'	330'	650'	970'	1290'	1610'	1930'	2240'	2560'	2880'	3000'

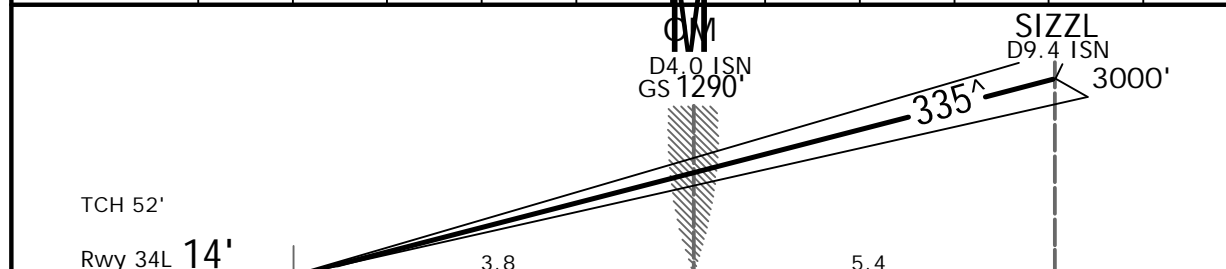

Gnd speed-Kts	70	90	100	120	140	160	ALSF-II	MANDATORY	320^	3000'
GS	3.00^	372	478	531	637	743	849	335^	500'	LT

STRAIGHT-IN LANDING RWY 34L
CAT II ILS
RA 101'
DA(H) 114' (100')

NS OPS


RVR 350m

YSSY/SYD

-(KINGSFORD SMITH) INTL

4 JUL 14 (11-14)

SYDNEY, NSW, AUSTRALIA
ILS-Y or LOC-Y Rwy 34L

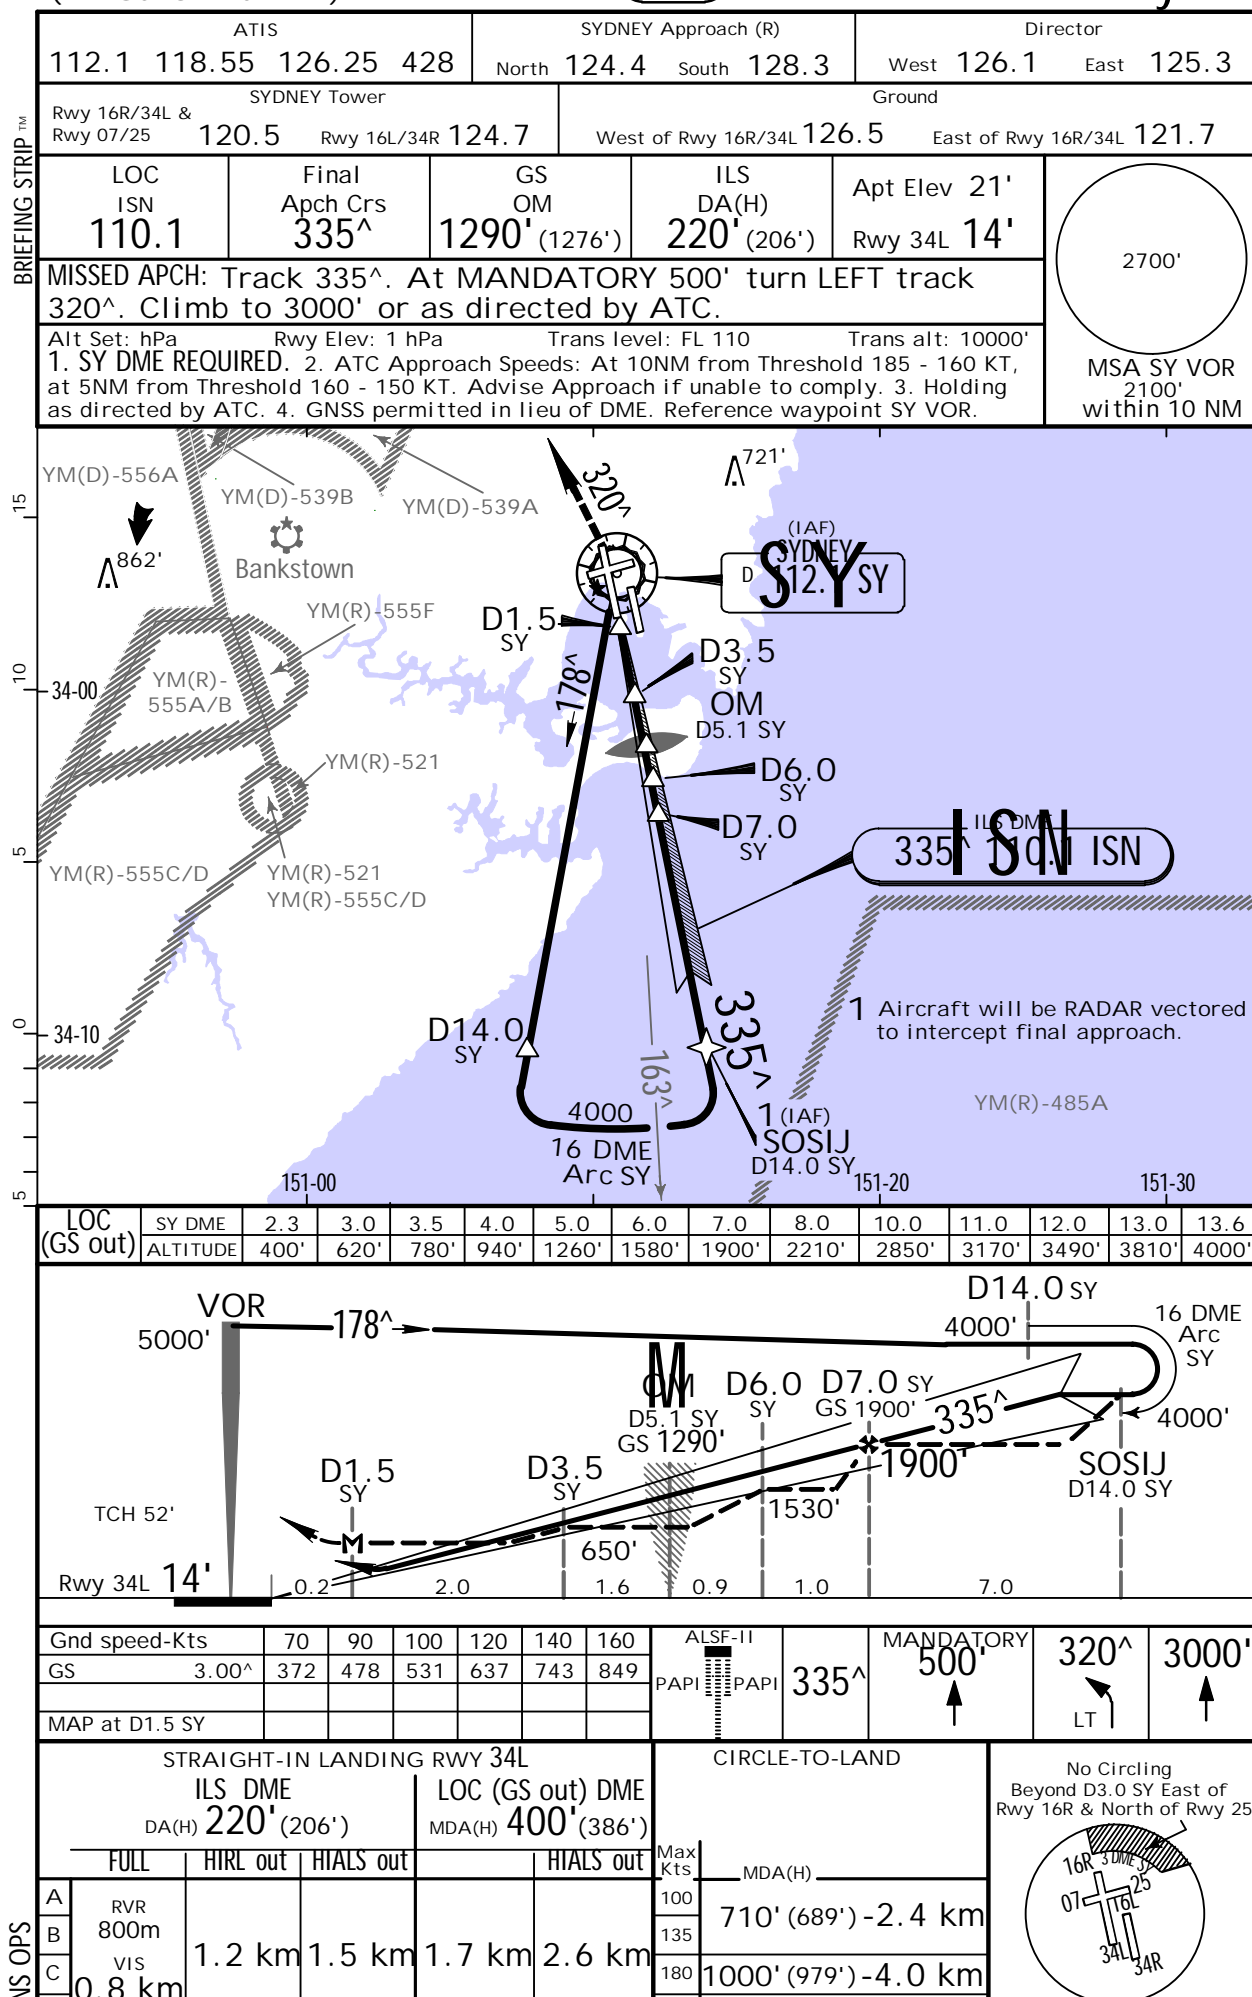

YSSY/SYD



JEPPESEN

SYDNEY, NSW, AUSTRALIA

-(KINGSFORD SMITH) INTL


4 JUL 14 (11-15)

ILS-Y PRM Rwy 34L


CAUTION: SIMULTANEOUS CLOSE PARALLEL OPERATIONS

BRIEFING STRIP

ATIS				SYDNEY Approach (R)				Director			
112.1 118.55 126.25 428				North 124.4 South 128.3				West 126.1 East 125.3			
SYDNEY Tower				MONITOR				Ground			
Rwy 16R/34L & Rwy 07/25 120.5 Rwy 16L/34R 124.7				PRM 119.45				West of Rwy 16R/34L 126.5 East of Rwy 16R/34L 121.7			
LOC ISN 110.1		Final Appch Crs 335^		GS OM 1290' (1276')		ILS DA(H) 220' (206')		Apt Elev 21' Rwy 34L 14'		<div>2700'</div> <div>MSA SY VOR 2100' within 10 NM</div>	
MISSED APCH: Track 335^. At MANDATORY 500' turn LEFT track 320^. Climb to 3000' or as directed by ATC.											
Alt Set: hPa Rwy Elev: 1 hPa Trans level: FL 110 Trans alt: 10000'											
1. SY DME REQUIRED. 2. Dual VHF communications required. 3. See 11-0 for " ILS PRM USER INSTRUCTIONS". 4. ATC Approach Speeds: At SIZZL 185 - 160 KT, at 5NM from Threshold 160 - 150 KT. Advise Approach if unable to comply. 5. Holding as directed by ATC. 6. GNSS permitted in lieu of DME. Reference waypoint SY VOR.											

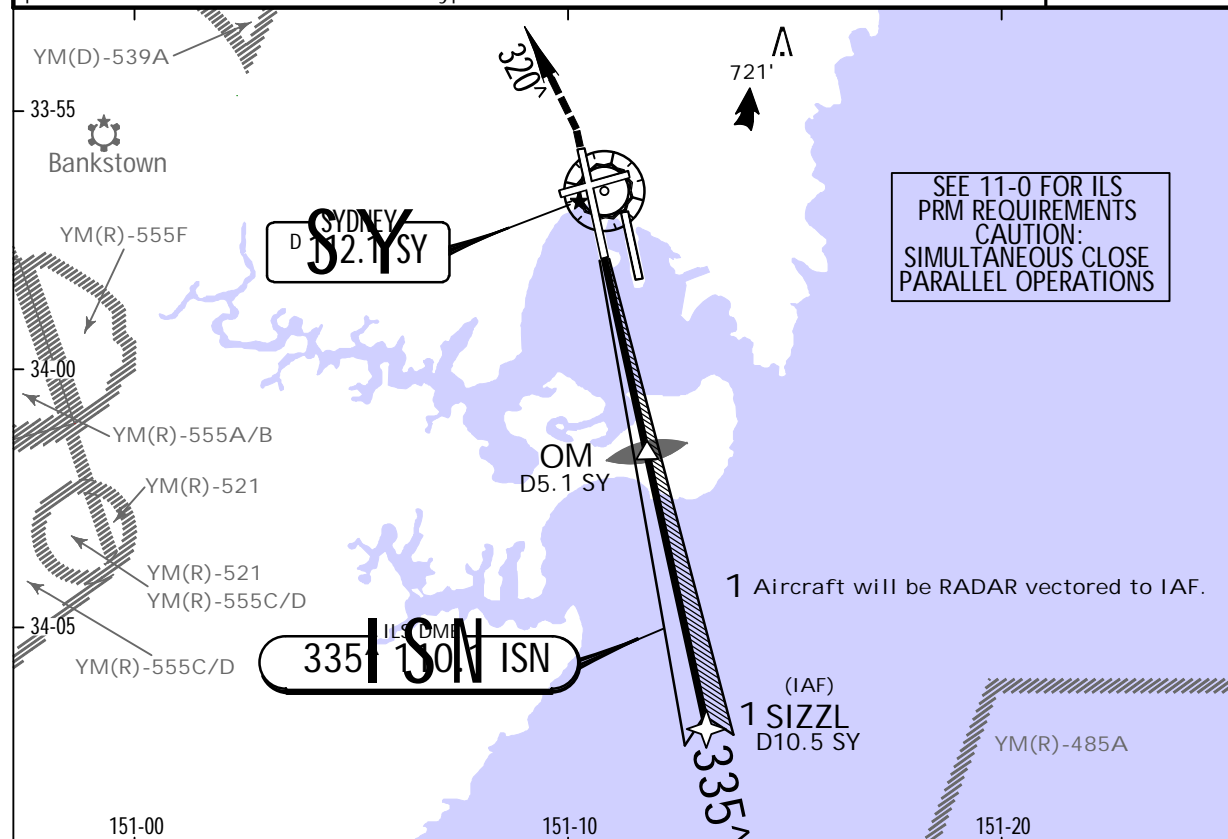

SY DME	1.8	2.0	3.0	4.0	5.0	6.0	7.0	8.0	9.0	10.0	10.5
ALTITUDE	220'	300'	620'	940'	1260'	1580'	1900'	2210'	2530'	2850'	3000'

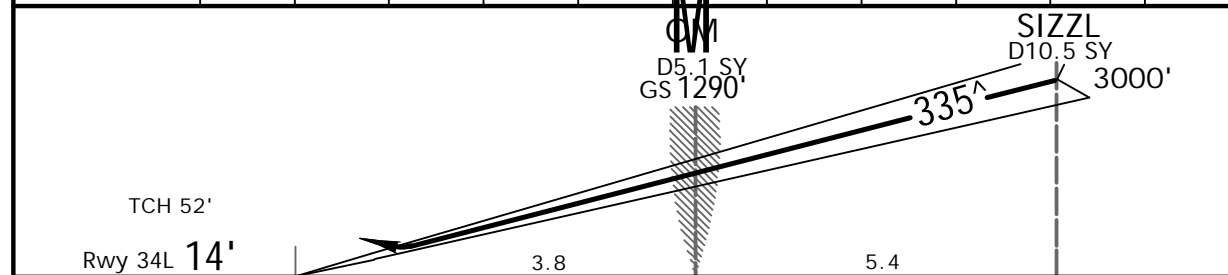

Gnd speed-Kts	70	90	100	120	140	160	ALSF-II	MANDATORY	320 [^]	3000'
GS	3.00 [^]	372	478	531	637	743	PAPI	335 [^]	500'	LT

STRAIGHT-IN LANDING RWY 34L ILS DME DA(H) 220' (206')				CIRCLE-TO-LAND		No Circling
FULL		HIRL out	HALS out			
A	RVR 800m VIS 0.8 km	1.2 km	1.5 km	A	NOT AUTHORIZED	
B				B		
C				C		

YSSY/SYD

-(KINGSFORD SMITH) INTL

4 JUL 14

11-16


SYDNEY, NSW, AUSTRALIA
ILS-Z or LOC-Z Rwy 34R

BRIEFING STRIP


ATIS		SYDNEY Approach (R)		Director	
112.1 118.55 126.25 428		North 124.4	South 128.3	West 126.1	East 125.3
SYDNEY Tower			Ground		
Rwy 16L/34R 124.7		Rwy 16R/34L & 07/25 120.5		West of Rwy 16R/34L 126.5 East of Rwy 16R/34L 121.7	
LOC IKN 109.3	Final Apch Crs 335^	GS D7.0 IKN 2240' (2227')	ILS DA(H) (CONDITIONAL) 270' (257')	Apt Elev 21' Rwy 34R 13'	<div>2700'</div>
MISSED APCH: Track 335^. At MANDATORY 600' turn RIGHT track 070^. Climb to 2000' or as directed by ATC.					
Alt Set: hPa Rwy Elev: 0 hPa Trans level: FL 110 Trans alt: 10000' 1. IKN DME REQUIRED. 2. ATC Approach Speeds: At SUZAN 185 - 160 KT, At 5NM from THR 160 - 150 KT. Advise Approach if unable to comply. 3. Holding as directed by ATC.					
					MSA SY VOR 2100' within 10 NM



LOC (GS out)	IKN DME	1.5	2.0	3.0	4.0	5.0	6.0	7.0	8.0	9.0	9.4
	ALTITUDE	500'	640'	960'	1280'	1600'	1920'	2240'	2560'	2870'	3000'

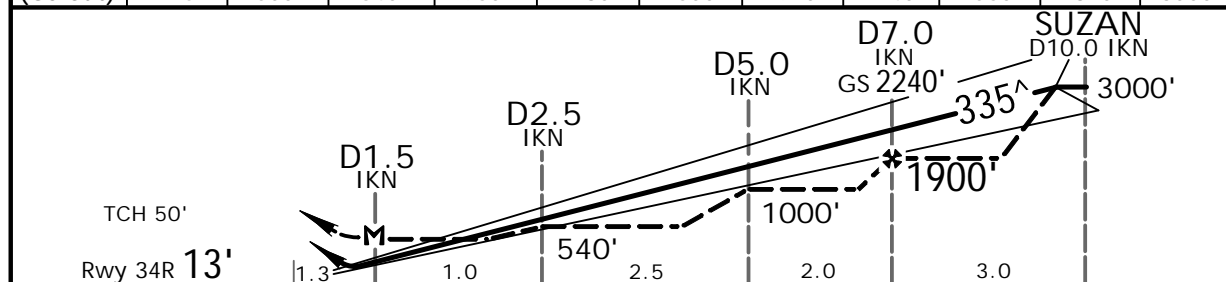

Gnd speed-Kts	70	90	100	120	140	160	REIL PAPI	335^	MANDATORY 600'	070^ RT	2000'
GS	3.00^	372	478	531	637	743					
MAP at D1.5 IKN											

STRAIGHT-IN LANDING RWY 34R				CIRCLE-TO-LAND		<div>No Circling</div> 
ILS DME		LOC (GS out) DME				
Missed approach requires a minimum climb gradient of 3.3%		Missed approach requires a minimum climb gradient of 2.5%				
DA(H) 270' (257')		DA(H) 460' (447')		MDA(H) 500' (487')		
A	1.5 km	2.5 km	2.7 km	A	NOT AUTHORIZED	
B				B		
C				C		

YSSY/SYD

-(KINGSFORD SMITH) INTL

4 JUL 14 11-17




JEPPESSEN

SYDNEY, NSW, AUSTRALIA

ILS-Z PRM Rwy 34R

CAUTION: SIMULTANEOUS CLOSE PARALLEL OPERATIONS

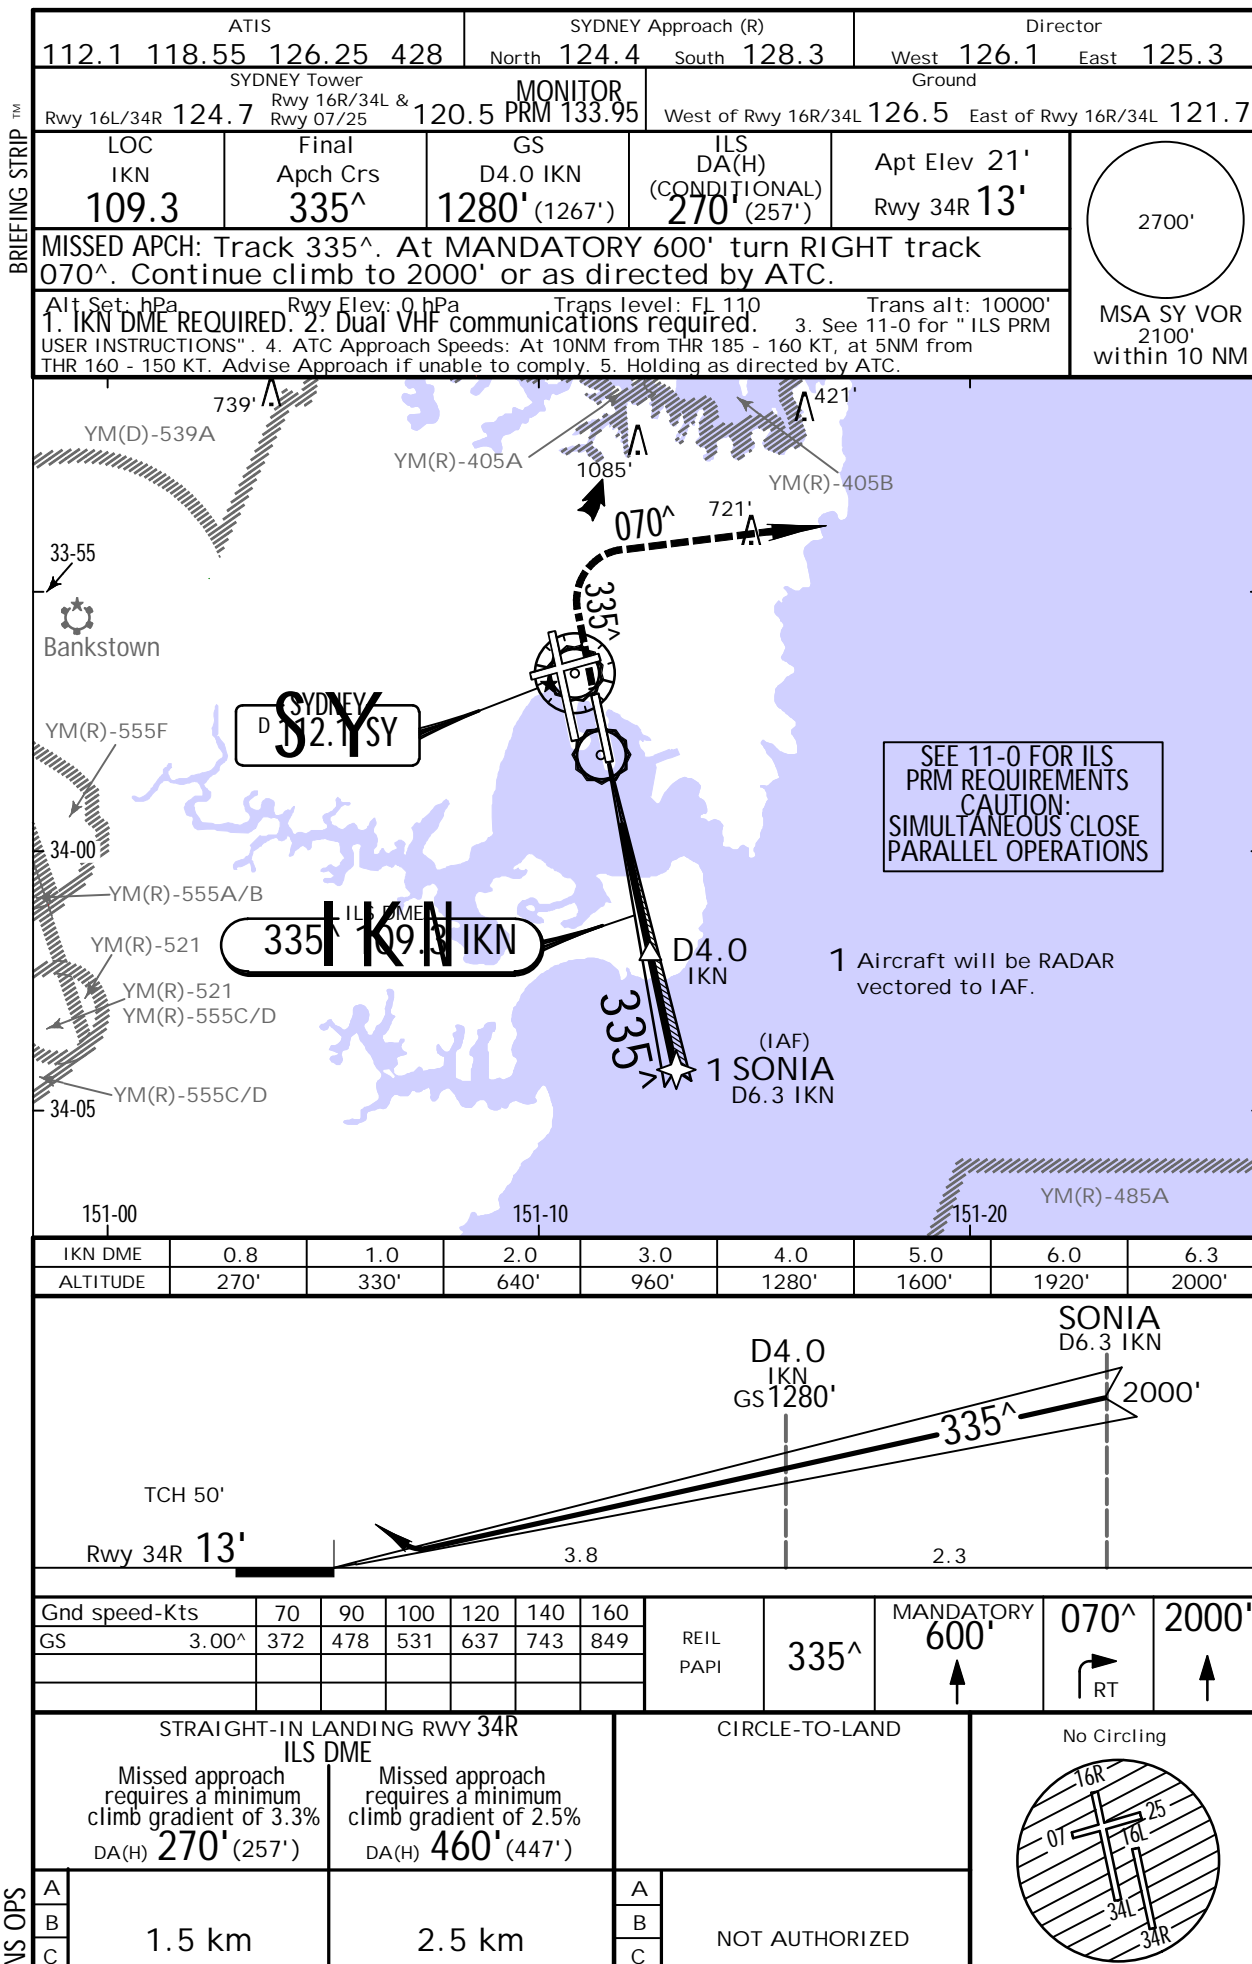

YSSY/SYD

-(KINGSFORD SMITH) INTL


4 JUL 14

11-18


SYDNEY, NSW, AUSTRALIA
ILS-Y or LOC-Y Rwy 34R

BRIEFING STRIP

ATIS			SYDNEY Approach (R)			Director			
112.1 118.55 126.25 428			North 124.4		South 128.3		West 126.1 East 125.3		
SYDNEY Tower					Ground				
Rwy 16L/34R 124.7			Rwy 16R/34L & 07/25 120.5		West of Rwy 16R/34L 126.5		East of Rwy 16R/34L 121.7		
LOC IKN 109.3		Final Apch Crs 335^		GS D8.6 SY 2240' (2227')		ILS DA(H) (CONDITIONAL) 270' (257')		Apt Elev 21' Rwy 34R 13'	
MISSED APCH: Track 335^. At MANDATORY 600' turn RIGHT track 070^. Climb to 2000' or as directed by ATC.									
Alt Set: hPa Rwy Elev: 0 hPa Trans level: FL 110 Trans alt: 10000' 1. SY DME REQUIRED. 2. GNSS permitted in lieu of DME. Reference waypoint SY VOR. 3. ATC Approach Speeds: At SUZAN 185 - 160 KT, at 5NM from Threshold 160 - 150 KT. Advise Approach if unable to comply. 4. Holding as directed by ATC.									
<div><div>2700'</div><div>MSA SY VOR 2100' within 10 NM</div></div>									

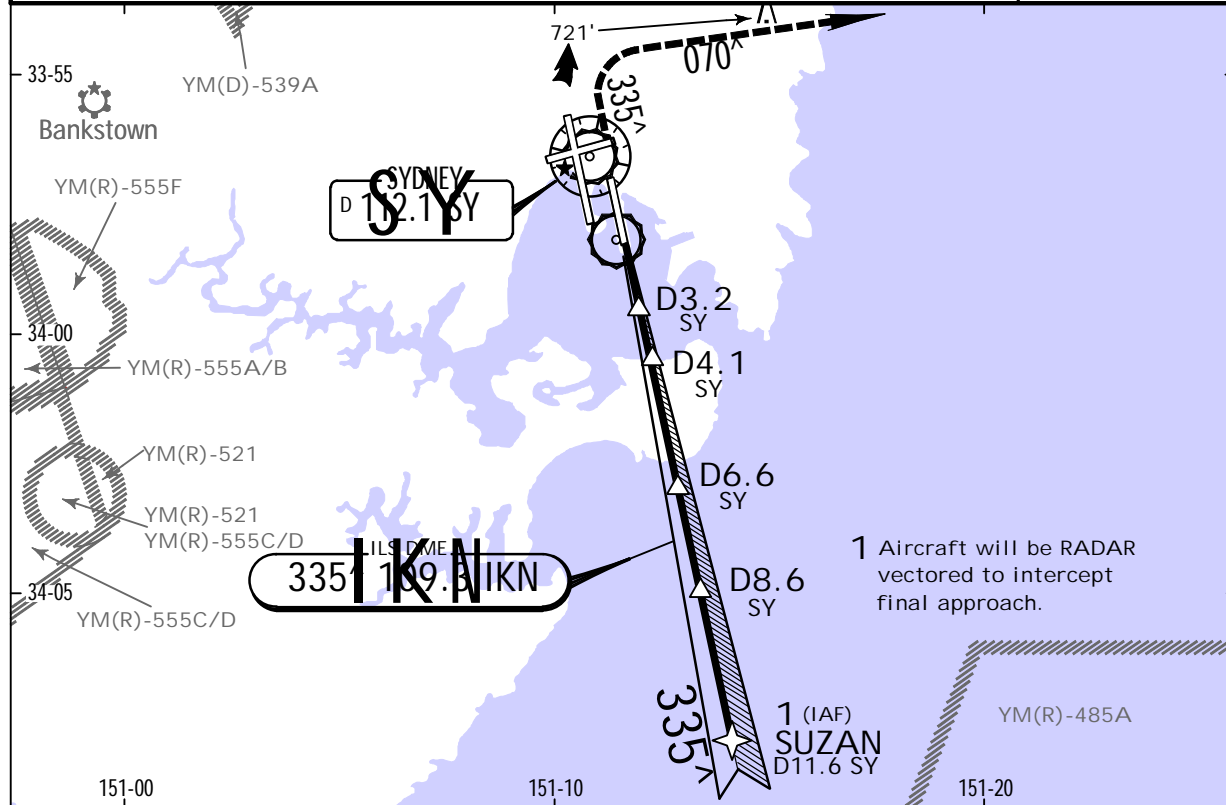


LOC (GS out)	SY DME	3.2	4.1	5.0	6.0	6.6	7.0	8.0	8.6	9.0	10.0	11.0
	ALTITUDE	500'	810'	1090'	1410'	1600'	1730'	2050'	2240'	2360'	2680'	3000'

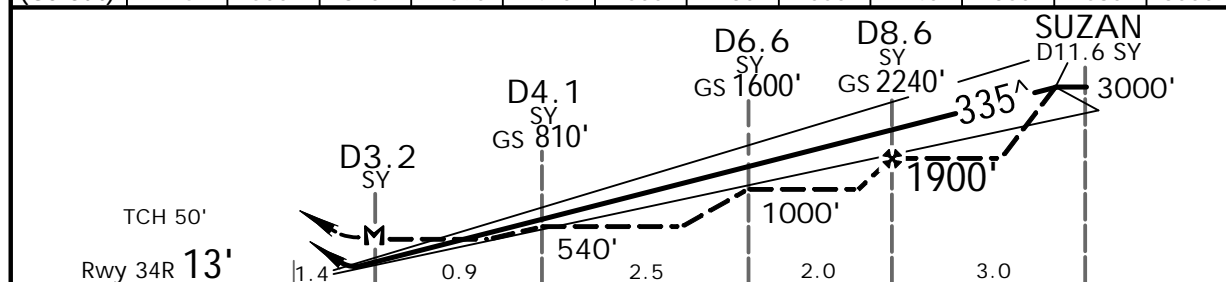

Gnd speed-Kts	70	90	100	120	140	160	REIL PAPI	335 [^]	MANDATORY 600' ↑	070 [^] ↗ RT	2000' ↑
GS 3.00 [^]	372	478	531	637	743	849					
MAP at D3.2 SY											

STRAIGHT-IN LANDING RWY 34R ILS DME				CIRCLE-TO-LAND No Circling	
Missed approach requires a minimum climb gradient of 3.3%		Missed approach requires a minimum climb gradient of 2.5%		LOC (GS out) DME	
DA(H) 270' (257')		DA(H) 460' (447')		MDA(H) 500' (487')	
A	1.5 km	2.5 km	2.7 km	A	NOT AUTHORIZED
B				B	
C				C	



YSSY/SYD

-(KINGSFORD SMITH) INTL

4 JUL 14


11-19



JEPPESEN

SYDNEY, NSW, AUSTRALIA
ILS-Y PRM Rwy 34R

CAUTION: SIMULTANEOUS CLOSE PARALLEL OPERATIONS

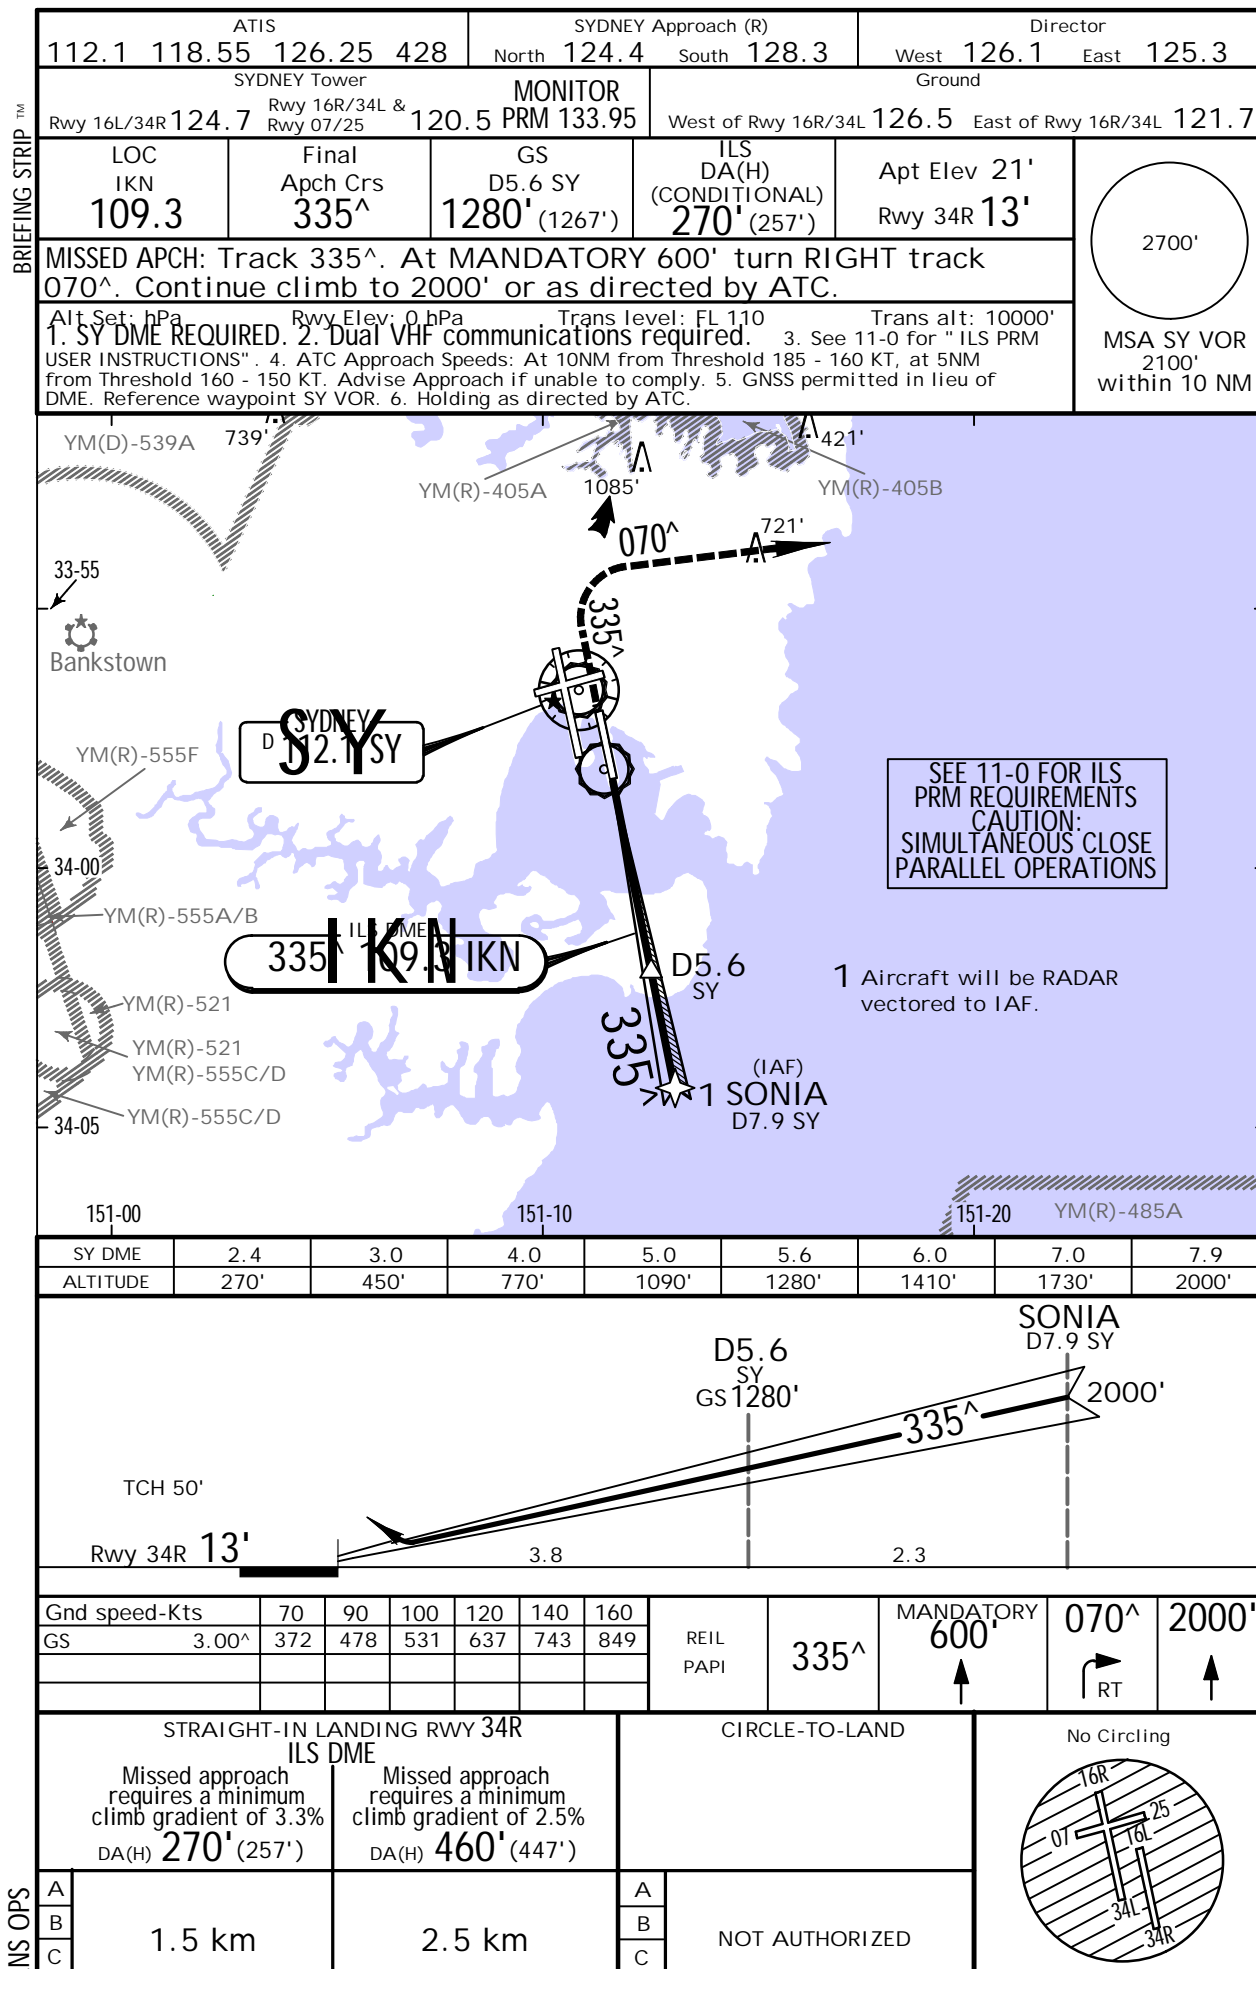

YSSY/SYD

-(KINGSFORD SMITH) INTL

JEPPESEN


4 JUL 14

(12-1)


SYDNEY, NSW, AUSTRALIA
RNAV-Z (GNSS) Rwy 07

BRIEFING STRIP


ATIS				SYDNEY Approach (R)		Director	
112.1	118.55	126.25	428	North	South	West	East
				124.4	128.3	126.1	125.3
SYDNEY Tower				Ground			
Rwy 16R/34L & 07/25		Rwy 16L/34R		West of Rwy 16R/34L		East of Rwy 16R/34L	
120.5		124.7		126.5		121.7	
RNAV	Final Apch Crs	Procedure Alt	SSYWF	MDA(H)	Apt Elev	2700'	
	062°	1330' (1314')		580' (564')	Rwy 07 16'		
MISSED APCH: Track direct to SSYWH, then track 062°. Climb to 2000' or as directed by ATC.							
Alt Set: hPa Rwy Elev: 1 hPa Trans level: FL 110 Trans alt: 10000'							MSA SY VOR
1. Max IAS for initial 210 Kts. 2. ATC Approach Speeds: At GLF NDB 185 - 160 KT, at 5NM from Threshold 160 - 150 KT. Advise Approach if unable to comply.							2100' within 10 NM

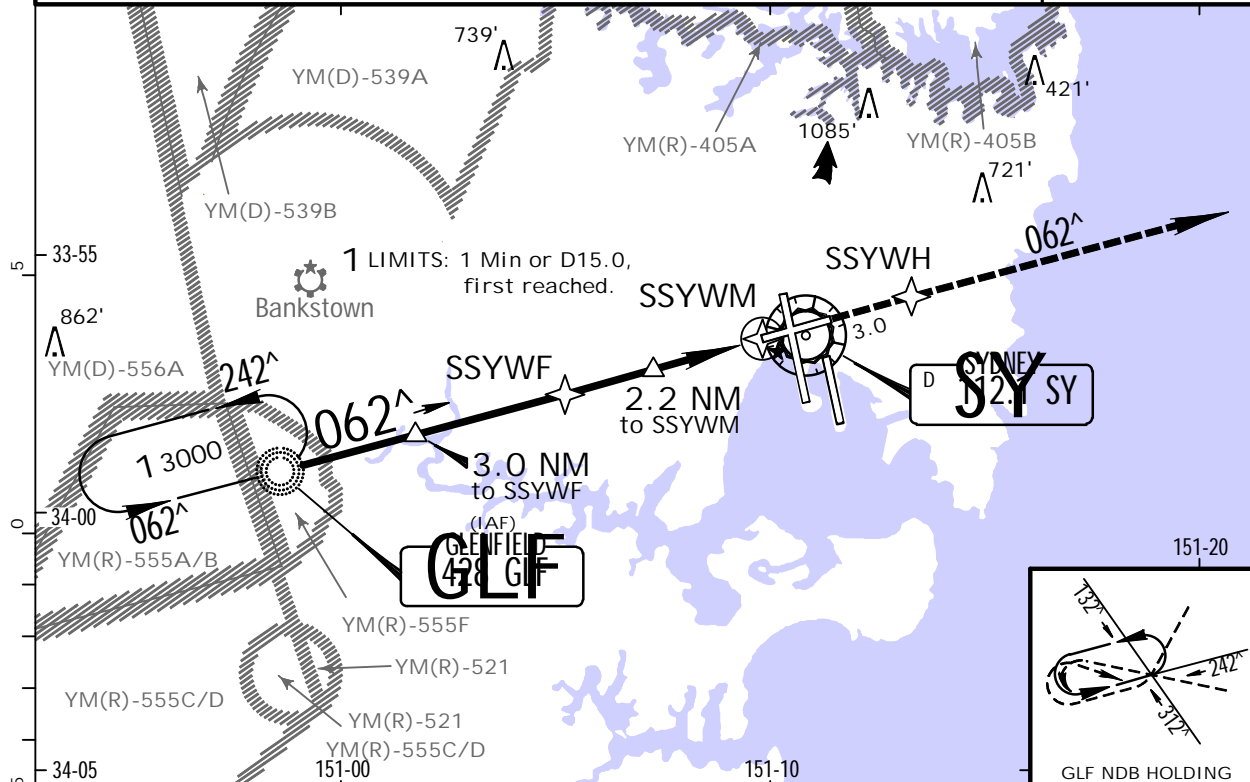

NM to NEXT WPT	5.2	4.0	3.0	2.0	1.0	SSYWF	3.0	2.2	1.6	SSYWM
ALTITUDE	3000'	2610'	2290'	1980'	1660'	1330'	1020'	770'	580'	

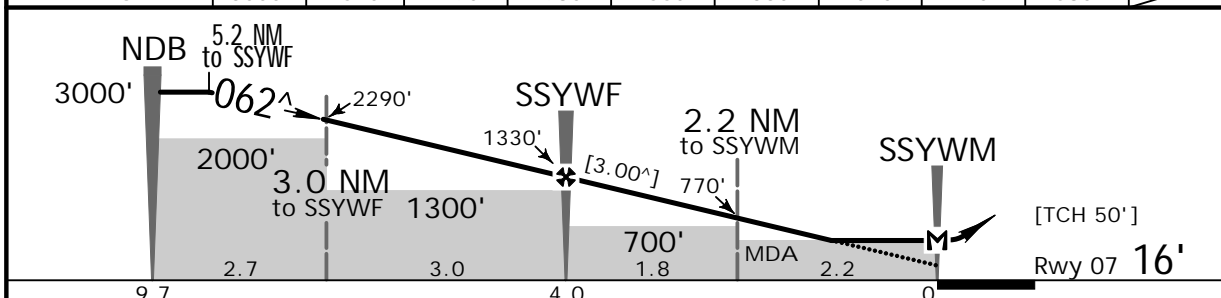

Gnd speed-Kts	70	90	100	120	140	160	REIL PAPI		SSYWH	
Descent Angle[3.00°]	372	478	531	637	743	849				
MAP at SSYWM										

STRAIGHT-IN LANDING RWY 07					CIRCLE-TO-LAND					No Circling Beyond D3.0 SY East of Rwy 16R & North of Rwy 25						
MDA(H) 580'(564')					MDA(H)											
A	3.2 km					Max Kts										
B						100	710'(689')-2.4 km									
C						135	1000'(979')-4.0 km									
D						205	1000'(979')-5.0 km									

YSSY/SYD

-(KINGSFORD SMITH) INTL


4 JUL 14

(12-2)


SYDNEY, NSW, AUSTRALIA
RNAV-Z (GNSS) Rwy 16L

BRIEFING STRIP

ATIS				SYDNEY Approach (R)		Director	
				North	South	West	East
112.1	118.55	126.25	428	124.4	128.3	126.1	125.3
SYDNEY Tower				Ground			
Rwy 16L/34R		Rwy 16R/34L & 07/25		West of Rwy 16R/34L		East of Rwy 16R/34L	
124.7		120.5		126.5		121.7	
RNAV	Final Apch Crs 155^	Procedure Alt SSYNF 1930' (1914')	MDA(H) 480' (464')	Apt Elev 21' Rwy 16L 16'		<div>2700'</div>	
MISSED APCH: Track 155^, at MANDATORY 600' turn LEFT, track direct to SSYNH, then track 125^.							
Climb to 3000' or as directed by ATC.							
Alt Set: hPa Rwy Elev: 1 hPa Trans level: FL 110 Trans alt: 10000'							
1. Max IAS for initial 210 Kts. 2. ATC Approach Speeds: At 10NM from Threshold 185 - 160 KT, at 5NM from Threshold 160 - 150 KT. Advise Approach if unable to comply. 3. Holding as directed by ATC.							
MSA SY VOR 2100' within 10 NM							

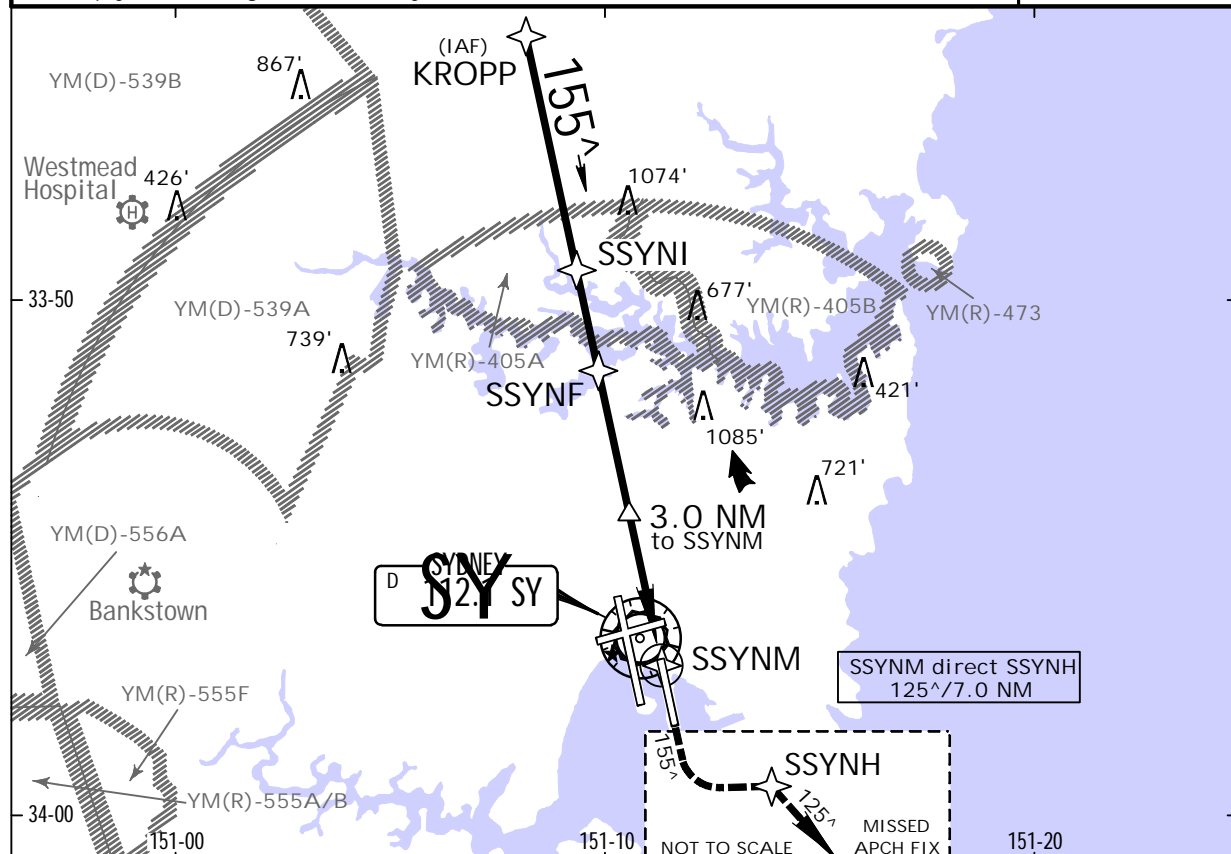

NM to NEXT WPT	4.4	4.0	3.0	2.0	1.0	SSYNI	1.0	SSYNF	5.0	4.0	3.0	2.0	1.3	SSYNM
ALTITUDE	4000'	3840'	3520'	3200'	2880'	2560'	2240'	1930'	1660'	1340'	1020'	700'	480'	

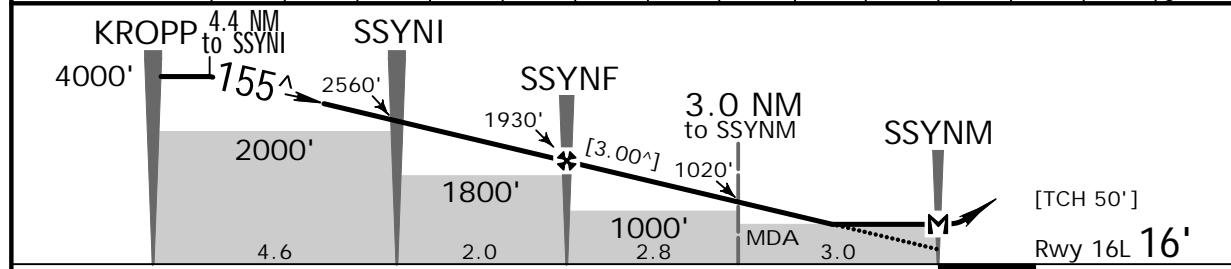

Gnd speed-Kts	70	90	100	120	140	160	HIALS	155^	MANDATORY	600'	LT	SSYNH
Descent Angle [3.00^]	372	478	531	637	743	849	PAPI					
MAP at SSYNM												

STRAIGHT-IN LANDING RWY 16L						CIRCLE-TO-LAND					
MDA(H) 480' (464')											
HIALS out											

A	2.6 km						A	NOT AUTHORIZED					
B							B						
C							C						

YSSY/SYD

-(KINGSFORD SMITH) INTL

4 JUL 14

(12-3)




JEPPESEN


SYDNEY, NSW, AUSTRALIA
RNAV-Z (GNSS) Rwy 16R

BRIEFING STRIP™


ATIS				SYDNEY Approach (R)		Director	
112.1 118.55 126.25 428				North 124.4	South 128.3	West 126.1	East 125.3
SYDNEY Tower Rwy 16R/34L & 07/25 120.5				Rwy 16L/34R 124.7	Ground West of Rwy 16R/34L 126.5		
			East of Rwy 16R/34L 121.7				
RNAV	Final Apch Crs 155^	Procedure Alt SYDNF 1700' (1692')	MDA(H) 520' (512')	Apt Elev 21' Rwy 16R 8'	<div>2700'</div> <div>MSA SY VOR 2100' within 10 NM</div>		
MISSED APCH: Track 155^, at MANDATORY 600' turn RIGHT, track direct to SYDNH, then track 170^ . Climb to 3000' or as directed by ATC.							
Alt Set: hPa Rwy Elev: 0 hPa Trans level: FL 110 Trans alt: 10000'							
1. Max IAS for initial 210 Kts. 2. ATC Approach Speeds: At CATHY 185 - 160 KT, at 5NM from Threshold 160 - 150 KT. Advise Approach if unable to comply. 3. Holding as directed by ATC.							

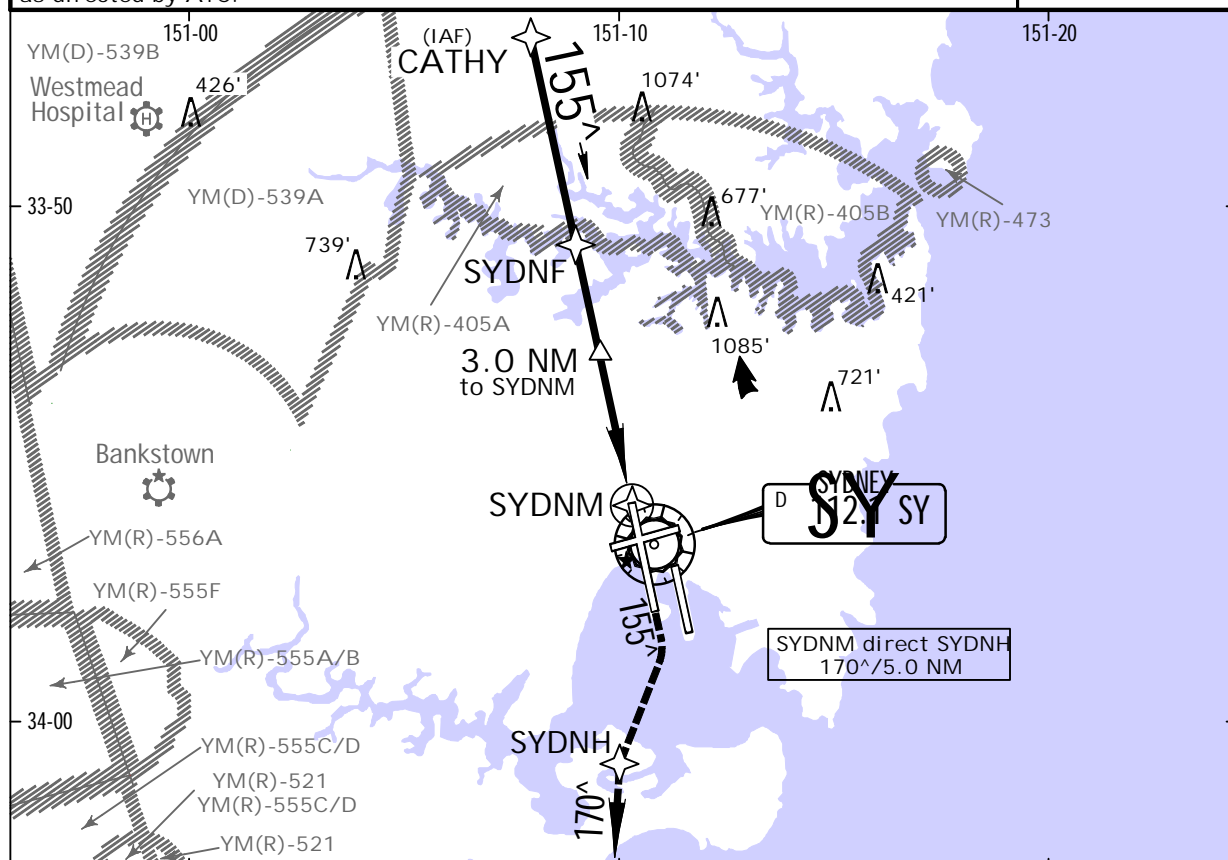

NM to NEXT WPT	4.1	4.0	3.0	2.0	1.0	SYDNF	5.0	4.0	3.0	2.0	1.4	SYDNM
ALTITUDE	3000'	2980'	2660'	2340'	2020'	1700'	1650'	1330'	1010'	700'	520'	

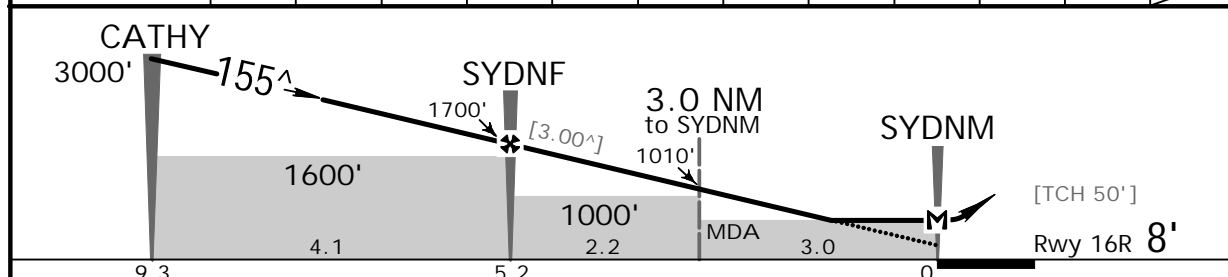

STRAIGHT-IN LANDING RWY 16R				CIRCLE-TO-LAND			
MDA(H) 520' (512')				MDA(H)			
HIALS out				710' (689') - 2.4 km			
2.9 km				1000' (979') - 4.0 km			
A				Max Kts			
B				100			
C				135			
D				180			

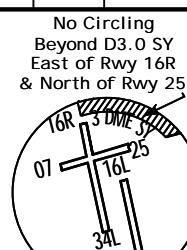

YSSY/SYD

-(KINGSFORD SMITH) INTL


4 JUL 14

(12-4)


SYDNEY, NSW, AUSTRALIA
RNAV-Z (GNSS) Rwy 25

BRIEFING STRIP


ATIS				SYDNEY Approach (R)		Director	
				North	South	West	East
112.1	118.55	126.25	428	124.4	128.3	126.1	125.3
SYDNEY Tower					Ground		
Rwy 16R/34L & 07/25			Rwy 16L/34R		West of Rwy 16R/34L		East of Rwy 16R/34L
120.5			124.7		126.5		121.7
RNAV	Final Apch Crs 242^		Procedure Alt SSYEF 1590' (1570')		MDA(H) 520' (500')	Apt Elev 21' Rwy 25 20'	<div>2700'</div>
MISSED APCH: Track direct to SSYEH, thence track 242^ . Climb to 3000' or as directed by ATC.							
Alt Set: hPa Rwy Elev: 1 hPa Trans level: FL 110 Trans alt: 10000'							
1. Max IAS for initial 210 Kts. 2. ATC Approach Speeds: At JELLI 185 - 160 KT, at 5NM from Threshold, 160 - 150 KT. Advise Approach if unable to comply. 3. Holding as directed by ATC.							
MSA SY VOR 2100' within 10 NM							

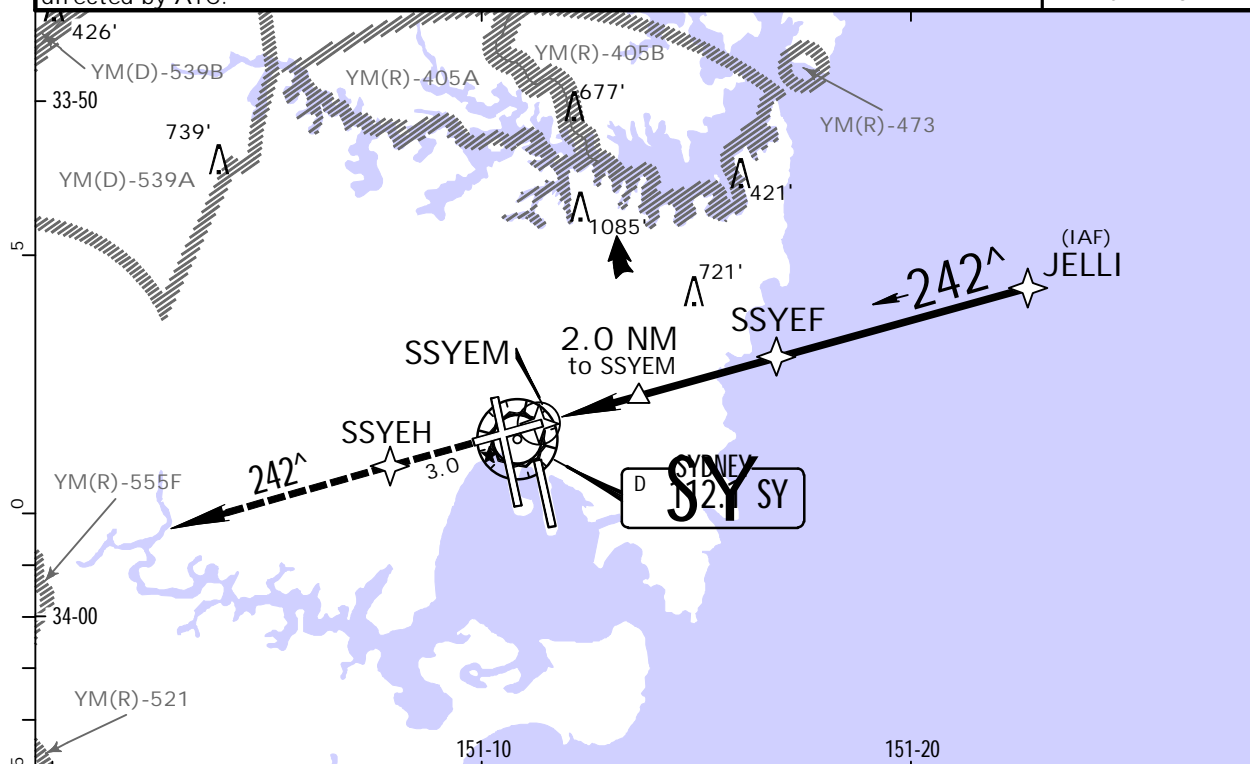

NM to NEXT WPT	SSYEM	1.4	2.0	3.0	4.0	SSYEF	1.0	2.0	3.0	4.0	4.4
ALTITUDE		520'	710'	1030'	1340'	1590'	1920'	2240'	2550'	2870'	3000'

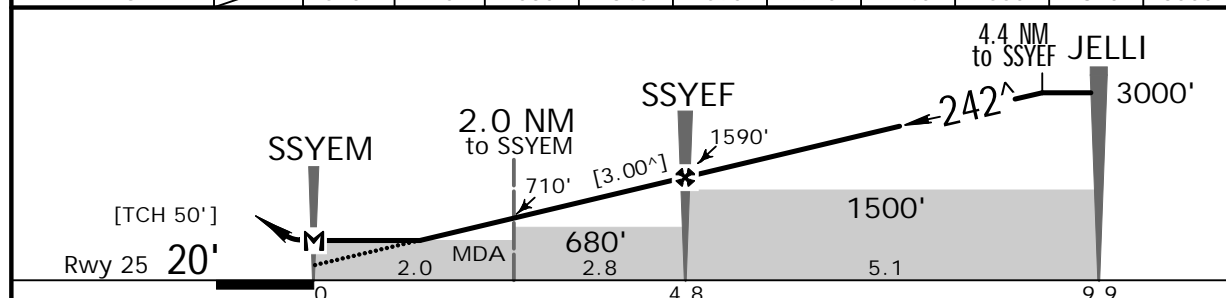

Gnd speed-Kts	70	90	100	120	140	160	PAPI		SSYEH	
Descent angle [3.00^]	372	478	531	637	743	849				
MAP at SSYEM										

STRAIGHT-IN LANDING RWY 25			CIRCLE-TO-LAND			<div>No Circling Beyond D3.0 SY East of Rwy 16R & North of Rwy 25</div> 
MDA(H) 520'(500')			Max Kts	MDA(H)		
A			100	710'(689')-2.4 km		
B			135			
C	2.8 km		180	1000'(979')-4.0 km		
D			205	1000'(979')-5.0 km		

IS OPS

YSSY/SYD

-(KINGSFORD SMITH) INTL

4 JUL 14

(12-5)




JEPPESSEN


SYDNEY, NSW, AUSTRALIA
RNAV-Z (GNSS) Rwy 34L

BRIEFING STRIP


ATIS				SYDNEY Approach (R)				Director	
112.1 118.55 126.25 428				North 124.4		South 128.3		West 126.1 East 125.3	
SYDNEY Tower						Ground			
Rwy 16R/34L & 07/25				Rwy 16L/34R		West of Rwy 16R/34L		East of Rwy 16R/34L	
120.5				124.7		126.5		121.7	
RNAV		Final Apch Crs 335^		Procedure Alt SYDSF 1900'(1886')		MDA(H) 450'(436')		Apt Elev 21' Rwy 34L 14'	
MISSED APCH: Track 335^, at MANDATORY 500' turn LEFT, track direct to SYDSH, then track 320^. Climb to 3000' or as directed by ATC.									<div><div></div><div>2700'</div></div>
Alt Set: hPa Rwy Elev: 1 hPa Trans level: FL 110 Trans alt: 10000'									
1. Max IAS for initial 210 Kts. 2. ATC Approach Speeds: At 10NM from Threshold 185 - 160 KT, at 5NM from Threshold 160 - 150 KT. Advise Approach if unable to comply. 3. Holding as directed by ATC.									
MSA SY VOR 2100' within 10 NM									

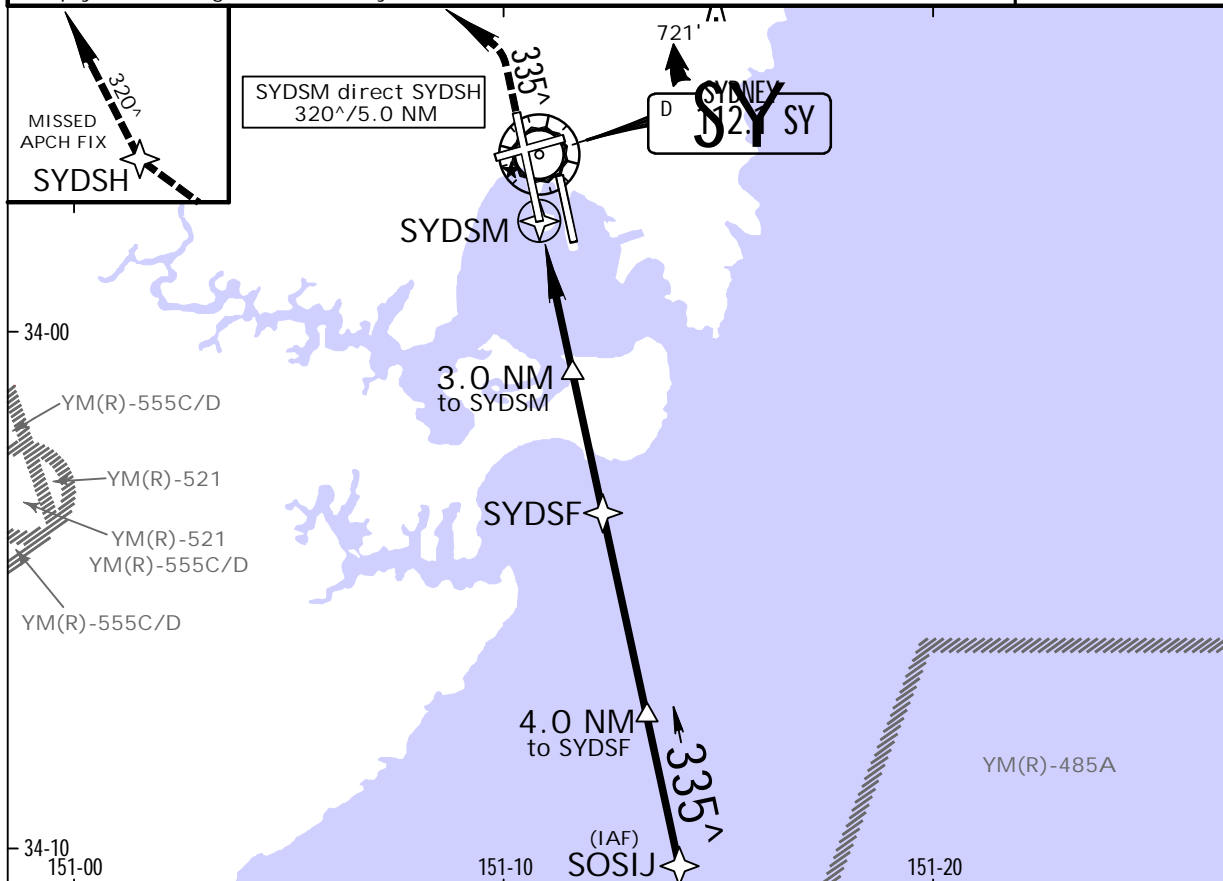

NM to NEXT WPT	SYDSM	1.2	2.0	3.0	4.0	5.0	SYDSF	1.0	2.0	3.0	4.0	5.0	6.0	6.6
ALTITUDE		450'	700'	1020'	1340'	1660'	1900'	2220'	2540'	2860'	3180'	3500'	3820'	4000'

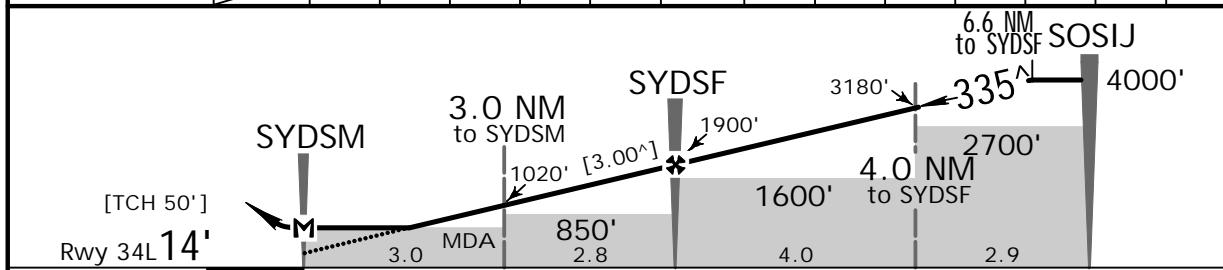

Gnd speed-Kts	70	90	100	120	140	160	<div style="display: flex; align-items: center;"> <div style="margin-right: 10px;"> HIALS PAPI PAPI </div> <div> MANDATORY 335[^] 500' </div> </div>	<div style="display: flex; align-items: center;"> <div style="margin-right: 10px;"> LT </div> <div> D SYDSH </div> </div>
Descent Angle[3.00 [^]]	372	478	531	637	743	849		
MAP at SYDSM								

STRAIGHT-IN LANDING RWY 34L		CIRCLE-TO-LAND		<div>No Circling Beyond D3.0 SY East of Rwy 16R & North of Rwy 25</div> 
MDA(H) 450'(436')		Max Kts	MDA(H)	
A	2.4 km	100	710'(689')-2.4 km	
B		135		
C		180	1000'(979')-4.0 km	

IS OPS

YSSY/SYD

-(KINGSFORD SMITH) INTL

4 JUL 14

(12-6)


SYDNEY, NSW, AUSTRALIA
RNAV-Z (GNSS) Rwy 34R

BRIEFING STRIP™

ATIS 112.1 118.55 126.25 428				SYDNEY Approach (R) North 124.4 South 128.3		Director West 126.1 East 125.3			
SYDNEY Tower Rwy 16L/34R 124.7				Rwy 16R/34L & 07/25 120.5		Ground West of Rwy 16R/34L 126.5		East of Rwy 16R/34L 121.7	
RNAV		Final Apch Crs 335^		Procedure Alt SSYSF 2240' (2227')		MDA(H) 550' (537')		Apt Elev 21' Rwy 34R 13'	
MISSED APCH: Track 335^, at MANDATORY 600' turn RIGHT, track direct to SSYSH, then track 070^. Climb to 2000' or as directed by ATC.								<div>2700'</div> <div>MSA SY VOR 2100' within 10 NM</div>	
Alt Set: hPa		Rwy Elev: 0 hPa		Trans level: FL 110		Trans alt: 10000'			
1. Max IAS for initial 210 Kts, for missed approach: 190 Kts. 2. ATC Approach Speeds: At SUZAN 185 - 160 KT, at 5NM from Threshold 160 - 150 KT. Advise Approach if unable to comply. 3. Holding as directed by ATC									



NM to NEXT WPT	SSYSM	1.5	2.0	3.0	4.0	5.0	6.0	SSYSF	1.0	2.0	2.4
ALTITUDE		550'	700'	1020'	1340'	1660'	1970'	2240'	2560'	2880'	3000'

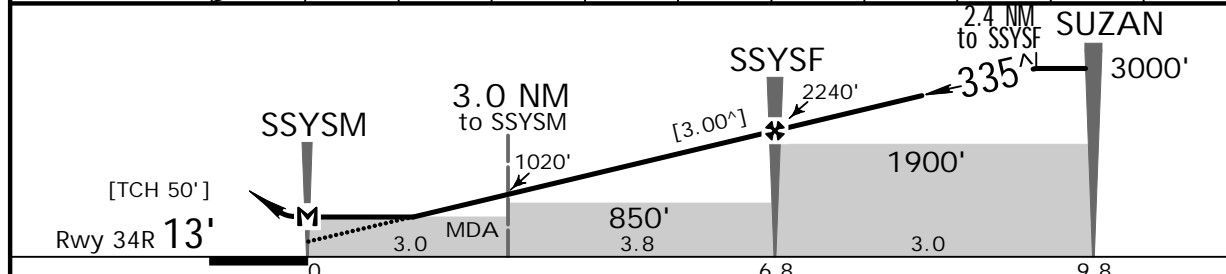

Gnd speed-Kts	70	90	100	120	140	160	REIL PAPI	335 [^]	MANDATORY 600'	RT	SSYSH
Descent Angle [3.00 [^]]	372	478	531	637	743	849					
MAP at SSYSM											

STRAIGHT-IN LANDING RWY 34R MDA(H) 550' (537')						CIRCLE-TO-LAND					
---	--	--	--	--	--	----------------	--	--	--	--	--

IS OPS

A	3.0 km	A	NOT AUTHORIZED
B		B	
C		C	

YSSY/SYD

-(KINGSFORD SMITH) INTL



JEPPESSEN

SYDNEY, NSW, AUSTRALIA


GLS Rwy 07

26 SEP 14


(12-40)

BRIEFING STRIP

ATIS				SYDNEY Approach (R)		Director	
				North	South	West	East
112.1	118.55	126.25	428	124.4	128.3	126.1	125.3
SYDNEY Tower				Ground			
Rwy 16R/34L & 07/25		Rwy 16L/34R		West of Rwy 16R/34L		East of Rwy 16R/34L	
120.5		124.7		126.5		121.7	
LAAS Ch 22790 G-07A	Final Apch Crs 062^	Minimum Alt NDB 3000' (2984')	GLS DA(H) 270' (254')	Apt Elev 21' Rwy 07 16'		<div>2700'</div>	
MISSED APCH: Track 062^. Climb to 2000' or as directed by ATC.							
Alt Set: hPa Rwy Elev: 1 hPa Trans level: FL 110 Trans alt: 10000'							
1. ATC Approach Speeds: At 10NM from Threshold 185 - 160 KT, at 5NM from Threshold 160 - 150 KT. Advise Approach if unable to comply.							
MSA SY VOR 2100' within 10 NM							

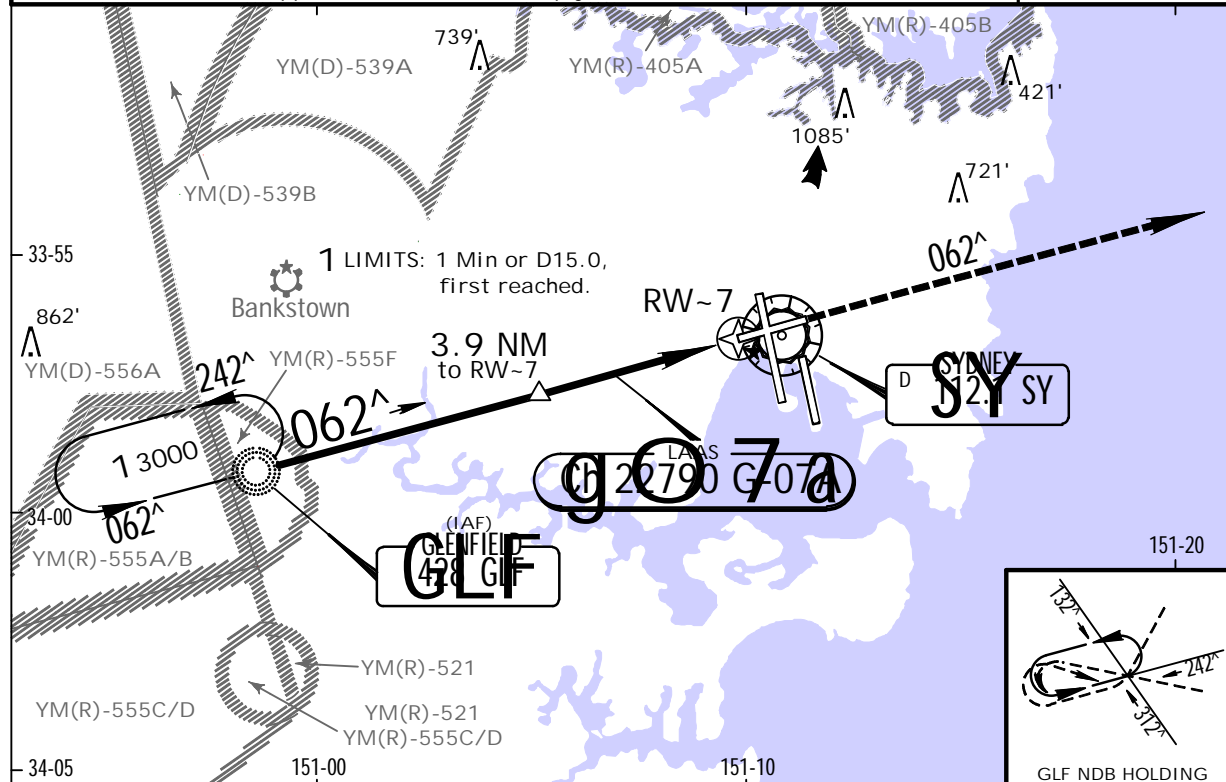


NM to RW-7	9.2	9.0	8.0	7.0	6.0	5.0	3.9	3.0	2.0	1.0	0.6
ALTITUDE	3000'	2930'	2610'	2300'	1980'	1660'	1300'	1020'	700'	390'	270'

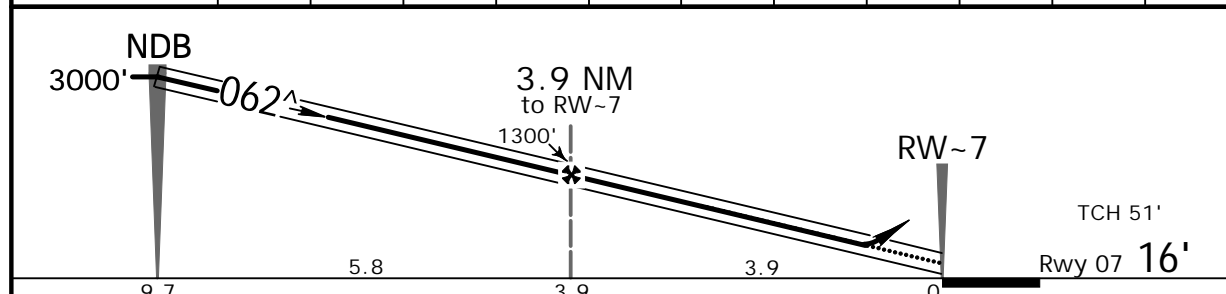

Gnd speed-Kts	70	90	100	120	140	160	REIL PAPI		062° 2000'	
Glide Path Angle	3.00°	372	478	531	637	743				
MAP at DA										

STRAIGHT-IN LANDING RWY 07		CIRCLE-TO-LAND		<div>No Circling Beyond D3.0 SY East of Rwy 16R & North of Rwy 25</div>
GLS		MDA(H)		
DA(H) 270'(254')		Max Kts		
1.5 km		100	710'(689')-2.4 km	
		135		
A		180	1000'(979')-4.0 km	
B		205	1000'(979')-5.0 km	



YSSY/SYD

-(KINGSFORD SMITH) INTL



JEPPESSEN

SYDNEY, NSW, AUSTRALIA


GLS Rwy 16L

26 SEP 14


12-41

BRIEFING STRIP

ATIS 112.1 118.55 126.25 428				SYDNEY Approach (R) North 124.4 South 128.3		Director West 126.1 East 125.3	
SYDNEY Tower Rwy 16L/34R 124.7 Rwy 16R/34L & 07/25 120.5				Ground West of Rwy 16R/34L 126.5		East of Rwy 16R/34L 121.7	
LAAS Ch 20735 G-16B	Final Apch Crs 155^	Minimum Alt KROPP 4000' (3984')	GLS DA(H) 220' (204')	Apt Elev 21'	<div>2700'</div>		
Rwy 16L 16'							
MISSED APCH: Track 155^. At MANDATORY 600' turn LEFT, track 125^.							
Climb to 3000' or as directed by ATC.							
Alt Set: hPa		Rwy Elev: 1 hPa	Trans level: FL 110	Trans alt: 10000'	MSA SY VOR 2100' within 10 NM		
1. ATC Approach Speeds: At 10NM from Threshold 185 - 160 KT, at 5NM from Threshold 160 - 150 KT. Advise Approach if unable to comply. 2. Holding as advised by ATC.							

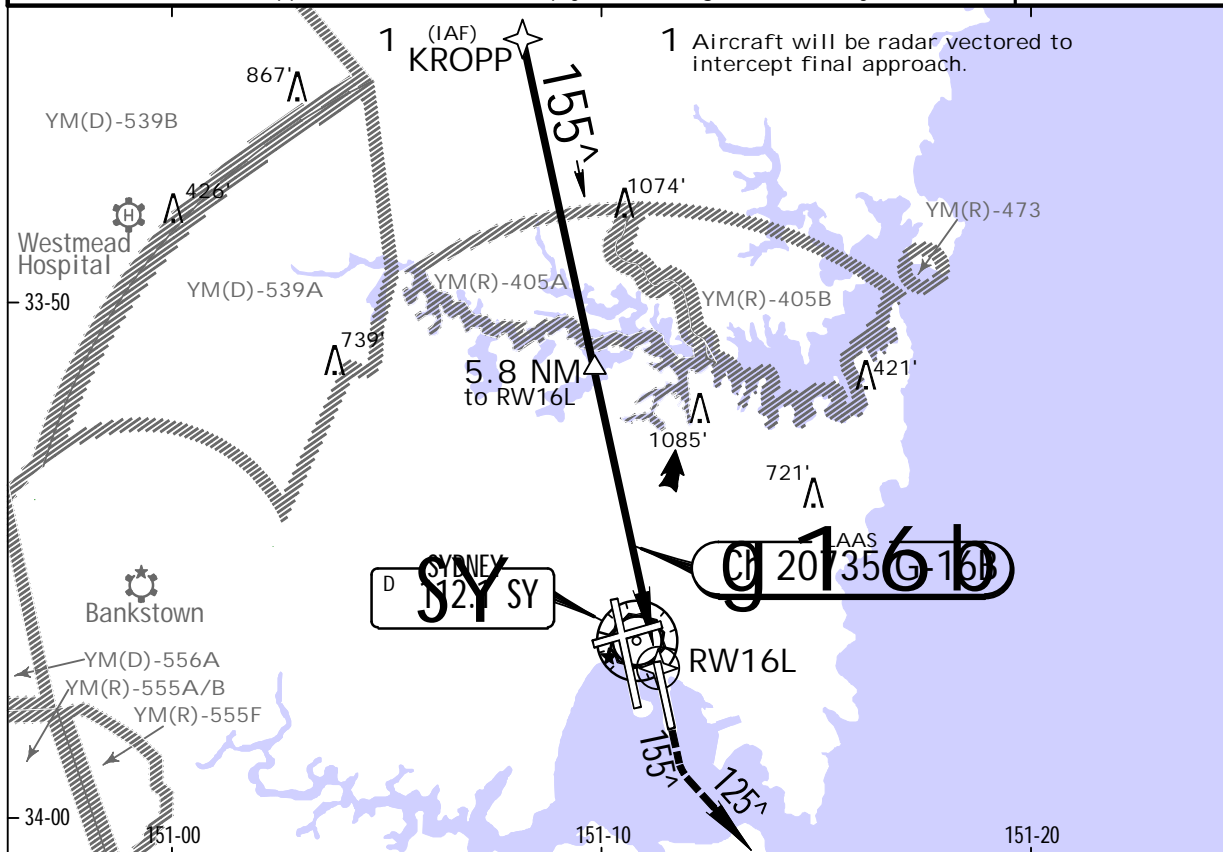

NM to RW16L	12.4	11.0	10.0	9.0	8.0	7.0	5.8	5.0	4.0	3.0	2.0	1.0	0.5
ALTITUDE	4000'	3570'	3250'	2930'	2610'	2300'	1920'	1660'	1340'	1020'	700'	390'	220'

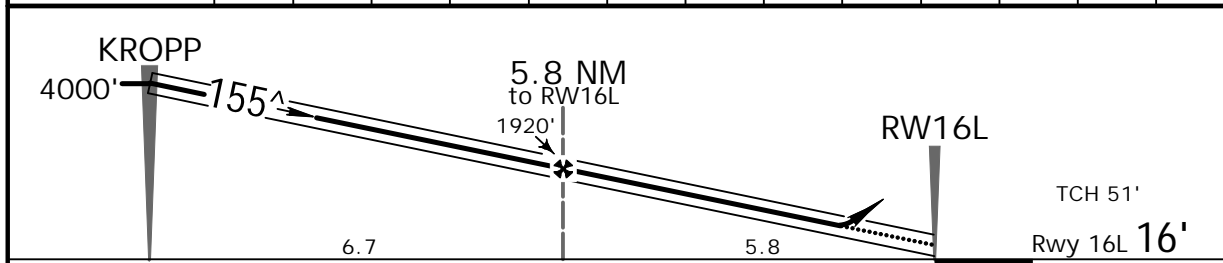

12.5							5.8							0							
Gnd speed-Kts	70	90	100	120	140	160	<div><div>HIALS</div><div>PAPI</div><div>PAPI</div></div>							<div><div>155[^]</div><div>MANDATORY</div><div>600</div><div>LT</div><div>125[^]</div></div>							
Glide Path Angle	3.00 [^]	372	478	531	637	743	849														
MAP at DA																					

STRAIGHT-IN LANDING RWY 16L			CIRCLE-TO-LAND		
GLS					
DA(H) 220' (204')					
FULL	HIRL out	HIALS out			

A				A			
B				B			
C	RVR 550m vis 0.8 km	1.2 km	1.5 km	C	NOT AUTHORIZED		

IS OPS

YSSY/SYD

-(KINGSFORD SMITH) INTL



JEPPESSEN

SYDNEY, NSW, AUSTRALIA


GLS Rwy 16R

26 SEP 14


(12-42)

BRIEFING STRIP

ATIS				SYDNEY Approach (R)				Director			
112.1 118.55 126.25 428				North 124.4		South 128.3		West 126.1		East 125.3	
SYDNEY Tower						Ground					
Rwy 16R/34L & 07/25				Rwy 16L/34R		West of Rwy 16R/34L			East of Rwy 16R/34L		
120.5				124.7		126.5			121.7		
LAAS Ch 21146 G-16A		Final Apch Crs 155^		Minimum Alt CATHY 3000' (2992')		GLS DA(H) 210' (202')		Apt Elev 21'		<div>2700'</div>	
G-16A								Rwy 16R 8'			
MISSED APCH: Track 155^. At MANDATORY 600' turn RIGHT, track 170^. Climb to 3000' or as directed by ATC.											
Alt Set: hPa		Rwy Elev: 0 hPa		Trans level: FL 110		Trans alt: 10000'					
1. ATC Approach Speeds: At 10NM from Threshold 185 - 160 KT, at 5NM from Threshold 160 - 150 KT. Advise Approach if unable to comply. 2. Holding as advised by ATC.											
MSA SY VOR 2100' within 10 NM											

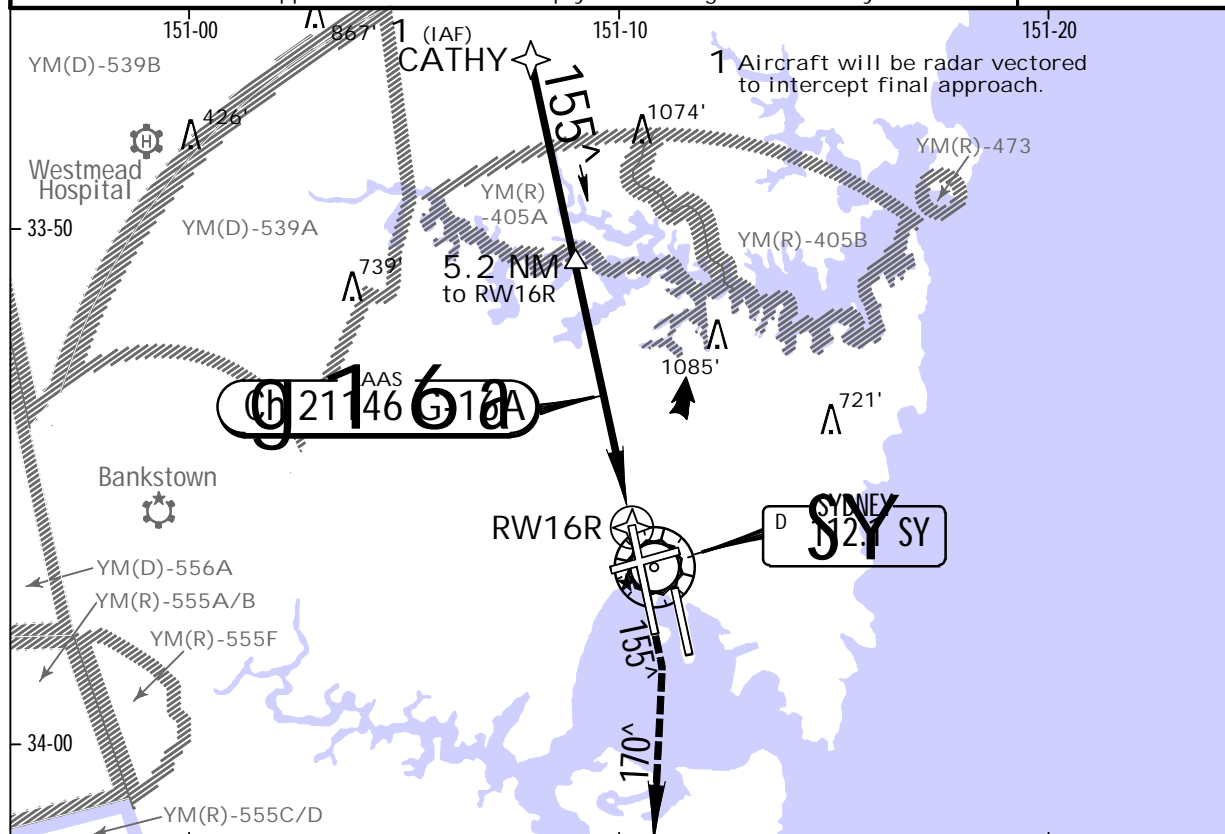


NM to RWY 16R	9.2	9.0	8.0	7.0	6.0	5.2	4.0	3.0	2.0	1.0	0.5
ALTITUDE	3000'	2920'	2610'	2290'	1970'	1700'	1330'	1010'	690'	380'	210'

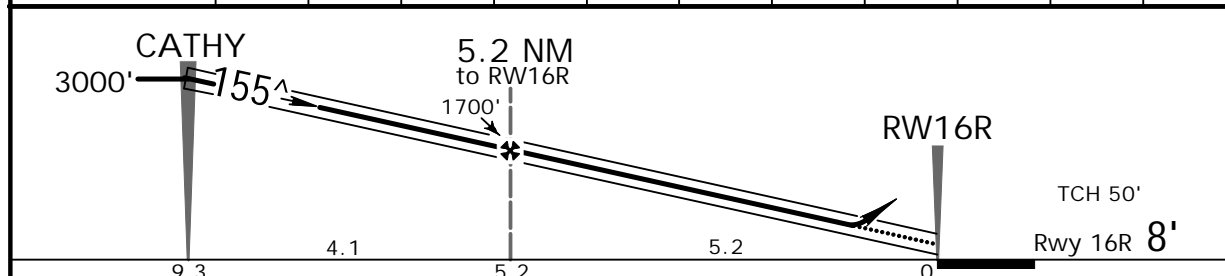

Gnd speed-Kts	70	90	100	120	140	160	ALSIF-II PAPI	155 [^]	MANDATORY 600' RT	170 [^]
Glide Path Angle	3.00 [^]	372	478	531	637	849				
MAP at DA										

STRAIGHT-IN LANDING RWY 16R				CIRCLE-TO-LAND		<div>No Circling Beyond D3.0 SY East of Rwy 16R & North of Rwy 25</div>
GLS						
DA(H) 210' (202')						
FULL		HIRL out	HIALS out	Max Kts	MDA(H)	
A	RVR 550m VIS 0.8 km	1.2 km	1.5 km	100	710'(689')-2.4 km	
B						
C						
				135	1000'(979')-4.0 km	
				180		

IS OPS



YSSY/SYD

- (KINGSFORD SMITH) INTL

26 SEP 14

(12-44)


JEPPesen SYDNEY, NSW, AUSTRALIA
26 SEP 14 12-44 GLS Rwy 34L

GLS Rwy 34L

ATIS 112.1 118.55 126.25 428				SYDNEY Approach (R) North 124.4 South 128.3				Director West 126.1 East 125.3							
SYDNEY Tower Rwy 16R/34L & 07/25 120.5				Rwy 16L/34R 124.7				Ground West of Rwy 16R/34L 126.5				East of Rwy 16R/34L 121.7			
LAAS Ch 21968 G-34A		Final Apch Crs 335^		Minimum Alt SOSIJ 4000' (3986')		GLS DA(H) 220' (206')		Apt Elev 21' Rwy 34L 14'		<div><div></div><div>2700'</div></div>					
MISSED APCH: Track 335^. At MANDATORY 500' turn LEFT, track 320^. Climb to 3000' or as directed by ATC.															
Alt Set: hPa Rwy Elev: 1 hPa Trans level: FL 110 Trans alt: 10000' 1. ATC Approach Speeds: At 10NM from Threshold 185 - 160 KT, at 5NM from Threshold 160 - 150 KT. Advise Approach if unable to comply. 2. Holding as advised by ATC.															
										MSA SY VOR 2100' within 10 NM					



NM to RW34L	0.5	1.0	2.0	3.0	4.0	5.0	5.8	7.0	8.0	9.0	10.0	11.0	12.0	12.4
ALTITUDE	220'	380'	700'	1020'	1340'	1660'	1900'	2300'	2610'	2930'	3250'	3570'	3890'	4000'

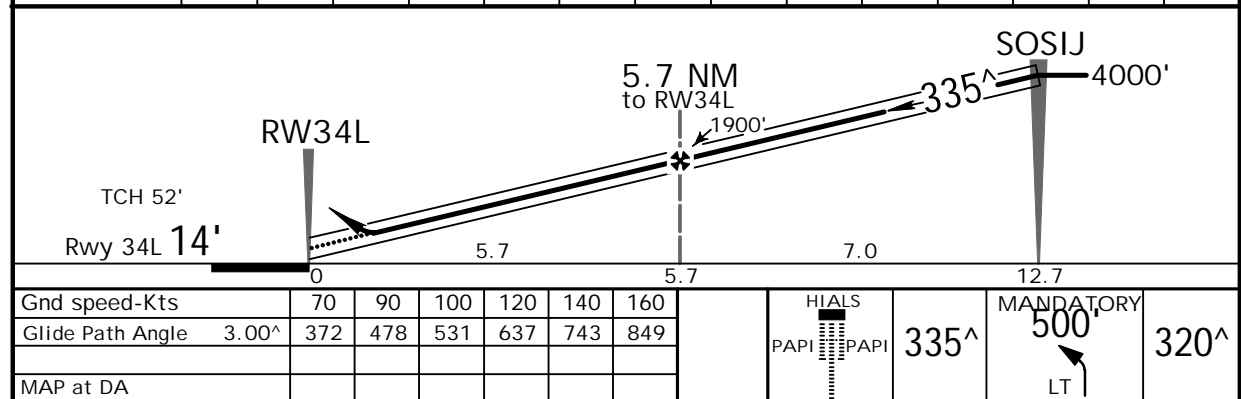

STRAIGHT-IN LANDING RWY 34L				CIRCLE-TO-LAND		<div>No Circling Beyond D3.0 SY East of Rwy 16R & North of Rwy 25</div>
GLS						
DA(H) 220' (206')				MDA(H)		
FULL		HIRL out	HIALS out	Max Kts		
A				100	710'(689')-2.4 km	
B				135		
C	RVR 550m vis 0.8 km	1.2 km	1.5 km	180	1000'(979')-4.0 km	
D						
E						

YSSY/SYD

-(KINGSFORD SMITH) INTL



JEPPESEN

SYDNEY, NSW, AUSTRALIA


GLS Rwy 34R


26 SEP 14

(12-45)


BRIEFING STRIP™

DATE/TIME START

ATIS				SYDNEY Approach (R)				Director			
112.1 118.55 126.25 428				North 124.4		South 128.3		West 126.1		East 125.3	
SYDNEY Tower						Ground					
Rwy 16L/34R		Rwy 16R/34L & 07/25				West of Rwy 16R/34L		East of Rwy 16R/34L			
124.7		120.5				126.5		121.7			
LAAS Ch 22379 G-34B		Final Apch Crs 335 [^]		Minimum Alt SUZAN 3000' (2987')		GLS DA(H) (CONDITIONAL) 270' (257')		Apt Elev 21' Rwy 34R 13'			
MISSED APCH: Track 335 [^] . At MANDATORY 600' turn RIGHT, track 070 [^] . Climb to 2000' or as directed by ATC.											
Alt Set: hPa Rwy Elev: 0 hPa Trans level: FL 110 Trans alt: 10000'											
1. ATC Approach Speeds: At 10NM from Threshold 185 - 160 KT, at 5NM from Threshold 160 - 150 KT. Advise Approach if unable to comply. 2. Holding as advised by ATC.											
MSA SY VOR 2100' within 10 NM											

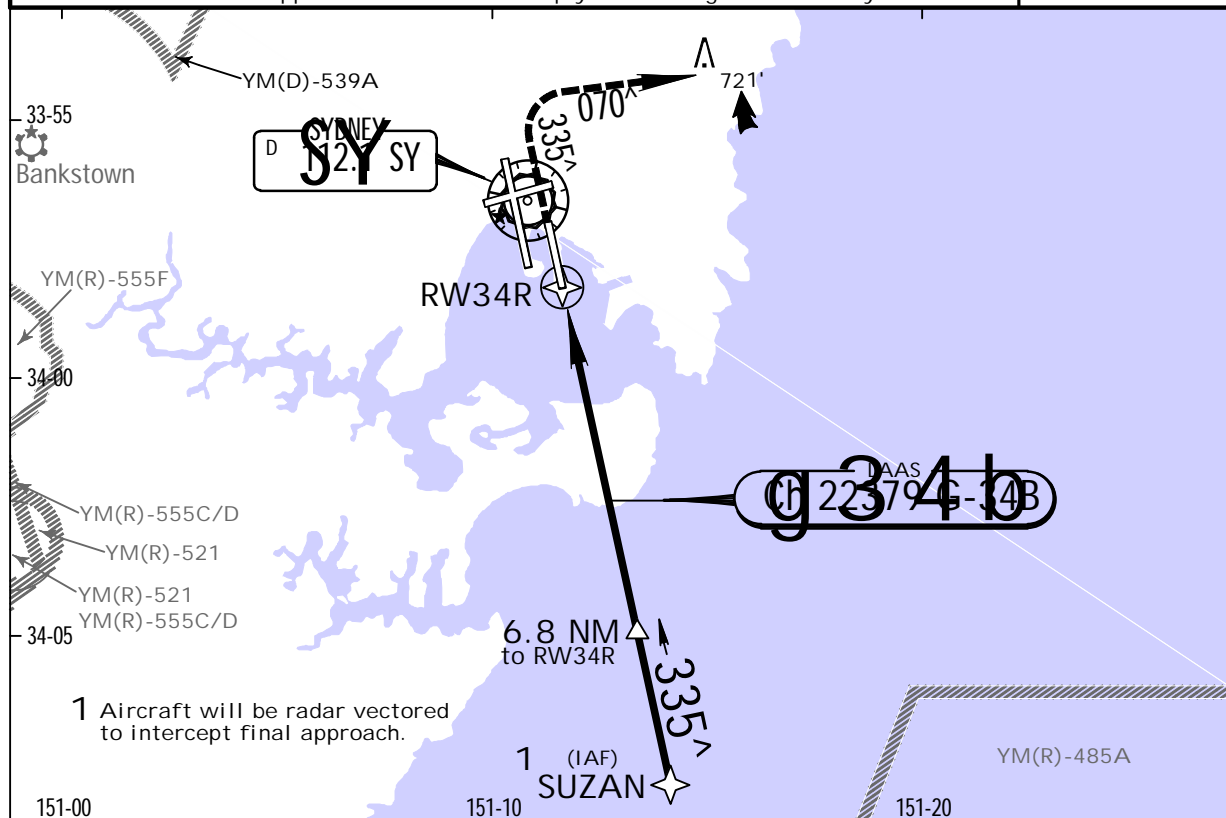

NM to RW34R	0.7	1.0	1.2	2.0	3.0	4.0	5.0	6.0	6.8	8.0	9.0	9.2
ALTITUDE	270'	380'	460'	700'	1020'	1340'	1660'	1970'	2240'	2610'	2930'	3000'

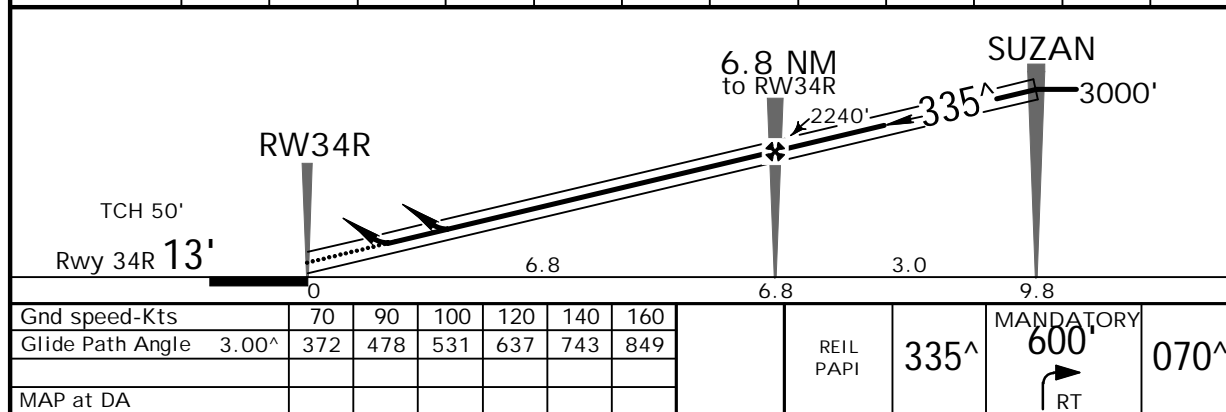

STRAIGHT-IN LANDING RWY 34R Missed approach climb gradient 3.3% DA(H) 270' (257')				CIRCLE-TO-LAND Missed approach climb gradient 2.5% DA(H) 460' (447')			
Gnd speed-Kts 70 90 100 120 140 160				REIL PAPI 335 [^] MANDATORY 600' 070 [^]			
Glide Path Angle 3.00 [^] 372 478 531 637 743 849				MAP at DA			

A	1.5 km		2.5 km		A	NOT AUTHORIZED	
B					B		
C					C		

IS OPS

YSSY/SYD

- (KINGSFORD SMITH) INTL

4 JUL 14

13-1


**JEPPESEN**

SYDNEY, NSW, AUSTRALIA


VOR Rwy 07

BRIFFING STRIP™

ATIS 112.1 118.55 126.25 428				SYDNEY Approach (R) North 124.4 South 128.3		Director West 126.1 East 125.3	
SYDNEY Tower Rwy 16R/34L & 07/25 120.5			Rwy 16L/34R 124.7	Ground West of Rwy 16R/34L 126.5		East of Rwy 16R/34L 121.7	
VOR SY 112.1	Final Apch Crs 062^	Procedure Alt D7.0 2030' (2014')		MDA(H) 650' (634')	Apt Elev 21' Rwy 07 16'		<div>2700'</div> <div>MSA SY VOR 2100' within 10 NM</div>
MISSED APCH: Track 062^. Climb to 2000' or as directed by ATC .							
Alt Set: hPa Rwy Elev: 1 hPa Trans level: FL 110 Trans alt: 10000'							
1. SY DME REQUIRED. 2. GNSS permitted in lieu of DME. Reference waypoint SY VOR. 3. ATC Approach Speeds: At 10NM from Threshold 185 - 160 KT, at 5NM from Threshold 160 - 150 KT. Advise Approach if unable to comply.							

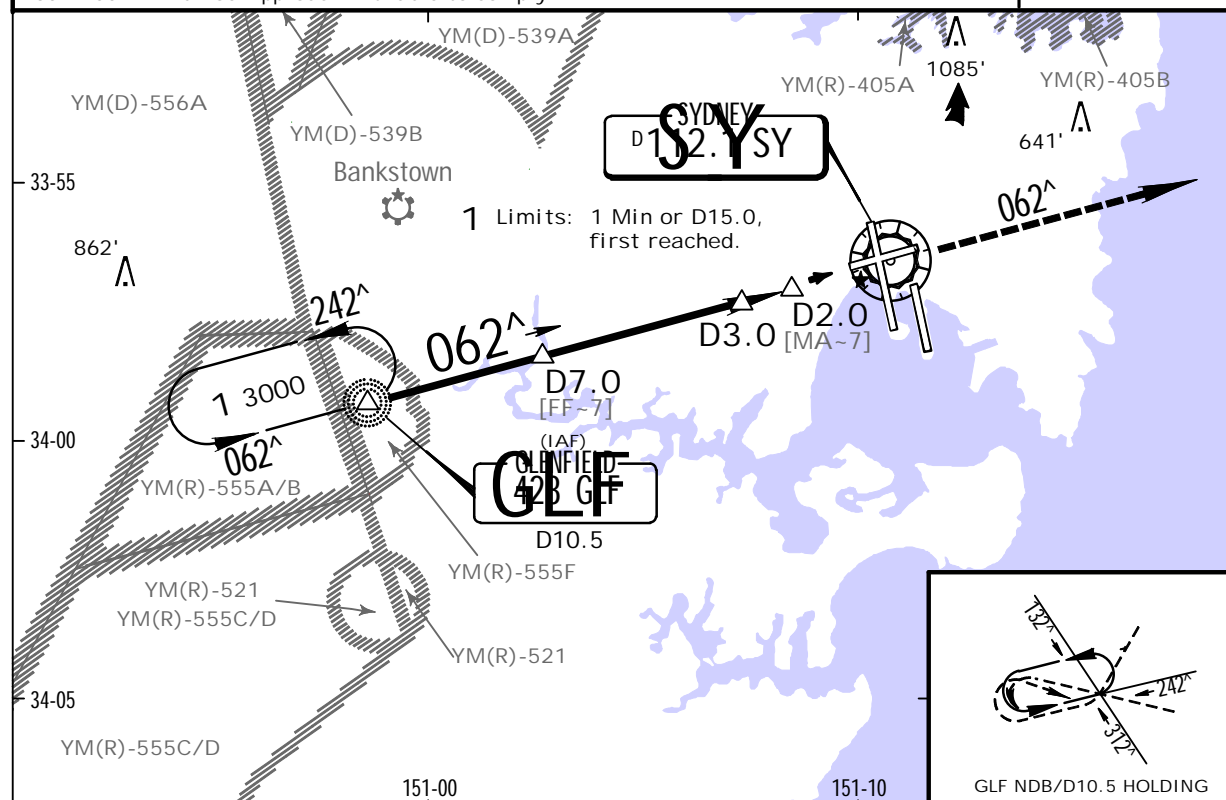

SY DME	10.0	9.0	8.0	7.0	6.0	5.0	4.0	3.0	2.7
ALTITUDE	3000'	2670'	2350'	2030'	1710'	1400'	1080'	760'	650'

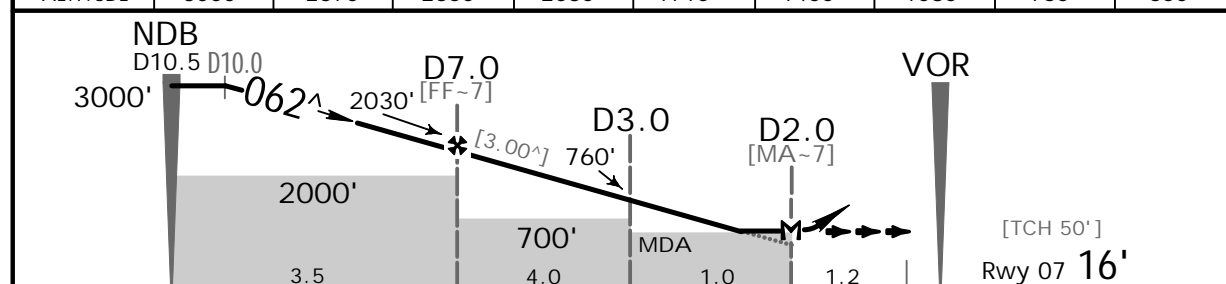

Gnd speed-Kts	70	90	100	120	140	160	REIL PAPI	062^	2000' ↑
Descent angle [3.00^]	372	478	531	637	743	849			
MAP at D2.0									

STRAIGHT-IN LANDING RWY 07

VOR DMF

MDA(H) 650' (634')

3.6 km

CIRCLE-TO-LAND


Max
Kts

2000-2001

710'(689')-2.4 km

1000' (979')-4.0 km

No Circling
Beyond D3.0 SY
East of Rwy 16R
& North of Rwy 25



JS OPS

YSSY/SYD


-(KINGSFORD SMITH) INTL

4 JUL 14 (13-2)


SYDNEY, NSW, AUSTRALIA
VOR Rwy 25

BRIEFING STRIP


ATIS				SYDNEY Approach (R)				Director			
112.1 118.55 126.25 428				North 124.4		South 128.3		West 126.1		East 125.3	
SYDNEY Tower						Ground					
Rwy 16R/34L & 07/25 120.5 Rwy 16L/34R 124.7						West of Rwy 16R/34L 126.5			East of Rwy 16R/34L 121.7		
VOR SY 112.1		Final Apch Crs 236^		Procedure Alt D7.0 2130' (2110')		MDA(H) 580' (560')		Apt Elev 21' Rwy 25 20'		<div>2700'</div>	
MISSED APCH: Track 236^, climb to 3000' or as directed by ATC .											
Alt Set: hPa		Rwy Elev: 1 hPa		Trans level: FL 110		Trans alt: 10000'					
1. SY DME REQUIRED. 2. Max IAS for initial: 210 kts. 3. GNSS permitted in lieu of DME. Reference waypoint SY VOR. 4. ATC Approach Speeds: At 10NM from Threshold 185 - 160 KT, at 5NM from Threshold 160 - 150 KT. Advise Approach if unable to comply.											
										MSA SY VOR 2100' within 10 NM	

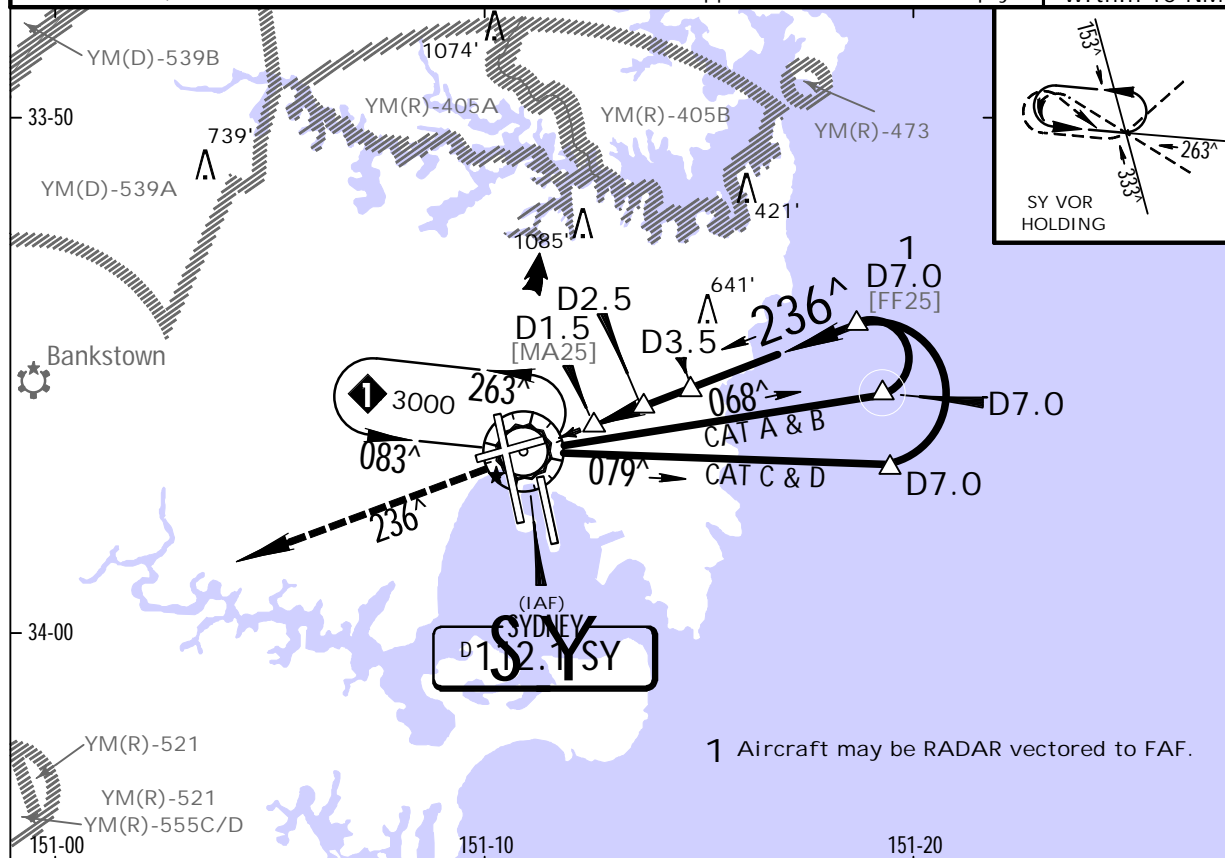

SY DME	2.1	3.0	4.0	5.0	6.0	7.0
ALTITUDE	580'	860'	1180'	1500'	1810'	2130'

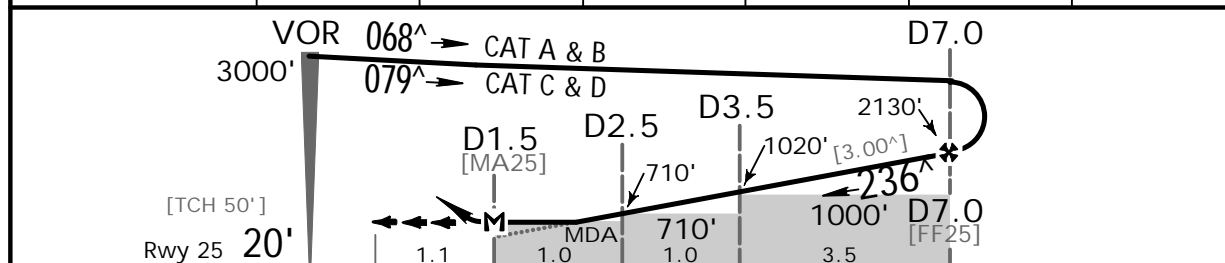

Gnd speed-Kts	70	90	100	120	140	160	PAPI	236 [^]	3000'
Descent angle [3.00 [^]]	372	478	531	637	743	849			
MAP at D1.5									

STRAIGHT-IN LANDING RWY 25			CIRCLE-TO-LAND			<div>No Circling Beyond D3.0 SY East of Rwy 16R & North of Rwy 25</div> 		
VOR DME								
MDA(H) 580' (560')			MDA(H)					
3.2 km								
A			Max Kts.					
B			100	710' (689')-2.4 km				
C			135					
			180	1000' (979')-4.0 km				

YSSY/SYD

-(KINGSFORD SMITH) INTL

4 JUL 14

(13-3)




JEPPESEN

SYDNEY, NSW, AUSTRALIA


VOR Rwy 34L

BRIEFING STRIP™


ATIS 112.1 118.55 126.25 428				SYDNEY Approach (R) North 124.4 South 128.3		Director West 126.1 East 125.3	
SYDNEY Tower Rwy 16R/34L & 07/25 120.5 Rwy 16L/34R 124.7				Ground West of Rwy 16R/34L 126.5 East of Rwy 16R/34L 121.7			
VOR SY 112.1	Final Apch Crs 340^	Procedure Alt D7.0 1890' (1876')	MDA(H) 410' (396')	Apt Elev 21' RWY 34L 14'	<div>2700'</div> <div>MSA SY VOR 2100' within 10 NM</div>		
MISSED APCH: Turn LEFT, track 320^. Climb to 3000' or as directed by ATC.							
Alt Set: hPa Rwy Elev: 1 hPa Trans level: FL 110 Trans alt: 10000'							
1. SY DME REQUIRED. 2. Holding as directed by ATC. 3. GNSS permitted in lieu of DME. Reference waypoint SY VOR. 4. ATC Approach Speeds: At 10NM from Threshold 185 - 160 KT, at 5NM from Threshold 160 - 150 KT. Advise Approach if unable to comply.							

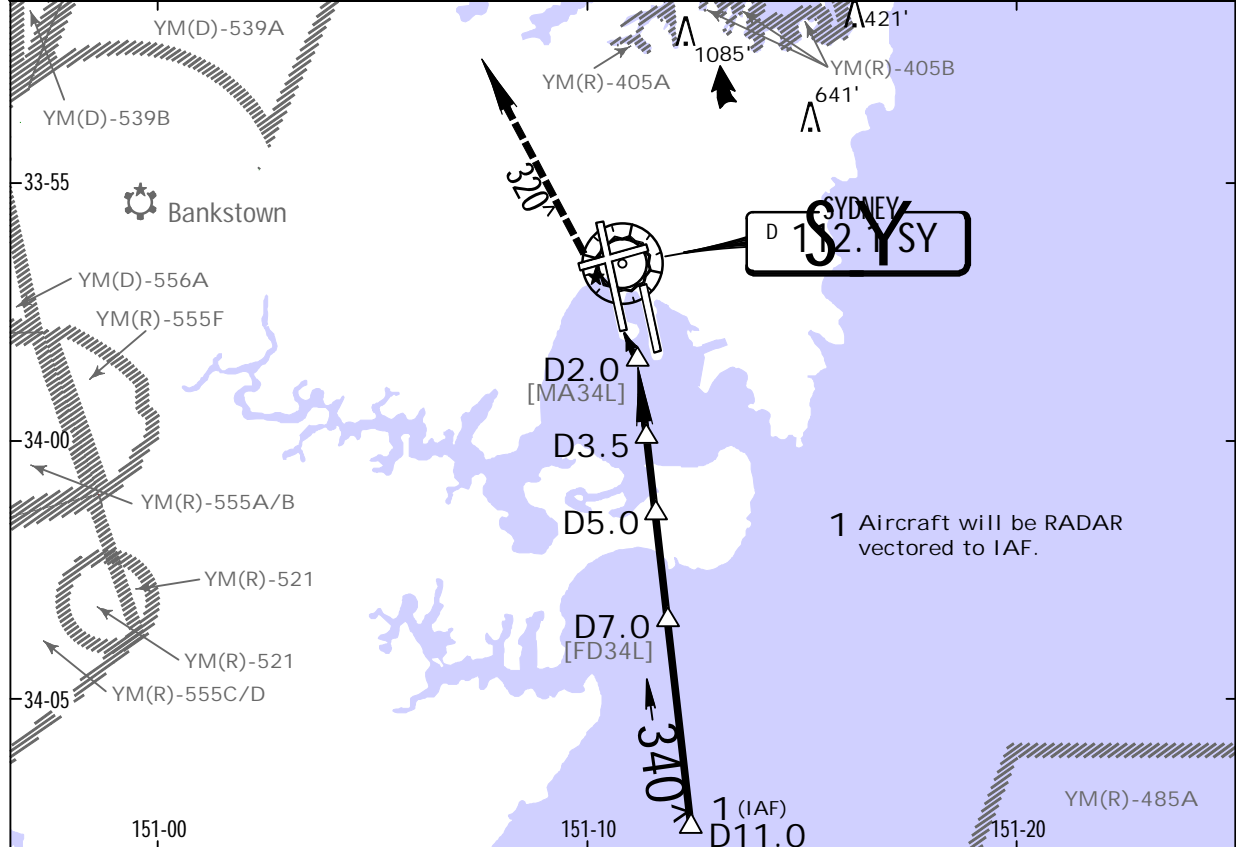

SY DME	2.2	3.0	3.5	4.0	5.0	6.0	7.0	8.0	9.0	10.0	10.5
ALTITUDE	410'	610'	770'	930'	1250'	1570'	1890'	2210'	2530'	2840'	3000'

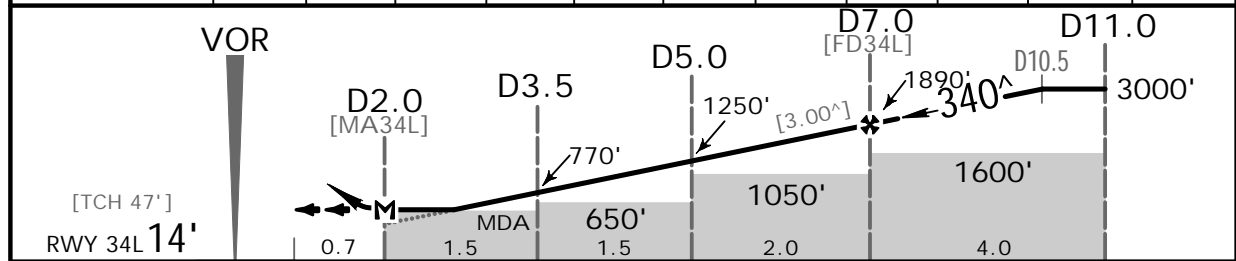

Gnd speed-Kts	70	90	100	120	140	160	PAPI		LT		320^		3000'	
Descent angle [3.00^]	372	478	531	637	743	849								
MAP at D2.0														

STRAIGHT-IN LANDING RWY 34L VOR DME MDA(H) 410' (396')			CIRCLE-TO-LAND			<div>No Circling Beyond D3.0 SY East of Rwy 16R & North of Rwy 25</div> 
A	2.1 km		Max Kts	MDA(H)		
100			710' (689')-2.4 km			
135						
180			1000' (979')-4.0 km			
C						

VS OPS

2.1 km

YSSY/SYD

-(KINGSFORD SMITH) INTL

4 JUL 14


(13-4)

JEPPESSEN


SYDNEY, NSW, AUSTRALIA
VOR-N

BRIEFING STRIP™

ATIS 112.1 118.55 126.25 428				SYDNEY Approach (R) North 124.4 South 128.3		Director West 126.1 East 125.3	
SYDNEY Tower Rwy 16R/34L & 07/25 120.5 Rwy 16L/34R 124.7				Ground West of Rwy 16R/34L 126.5 East of Rwy 16R/34L 121.7			
VOR SY 112.1	Final Apch Crs 146^	Procedure Alt D6.0 1700' (1679')	MDA(H) Refer to Minimums		Apt Elev 21'		<div>2700'</div> <div>MSA SY VOR 2100' within 10 NM</div>
MISSED APCH: Turn RIGHT track 170^ climb to 3000' or as directed by ATC.							
Alt Set: hPa Rwy Elev: 0 hPa Trans level: FL 110 Trans alt: 10000' 1. SY DME REQUIRED. 2. Holding as directed by ATC. 3. GNSS permitted in lieu of DME. Reference waypoint SY VOR. 4. ATC Approach Speeds: At 10NM from Threshold 185 - 160 KT, at 5NM from Threshold 160 - 150 KT. Advise Approach if unable to comply.							

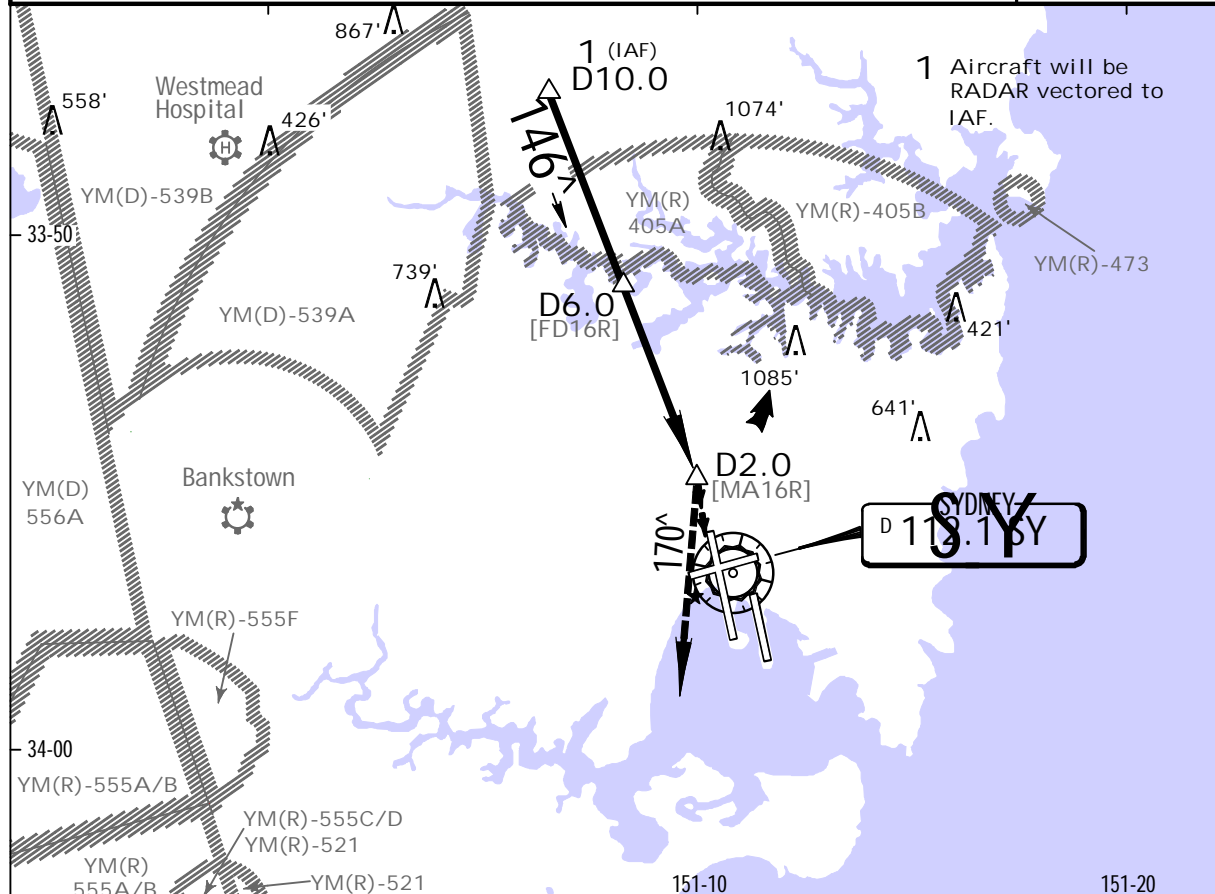

SY DME	10.0	9.0	8.0	7.0	6.0	5.0	4.0	3.8	3.0	2.9
ALTITUDE	3000'	2650'	2330'	2010'	1700'	1380'	1060'	1000'	740'	710'

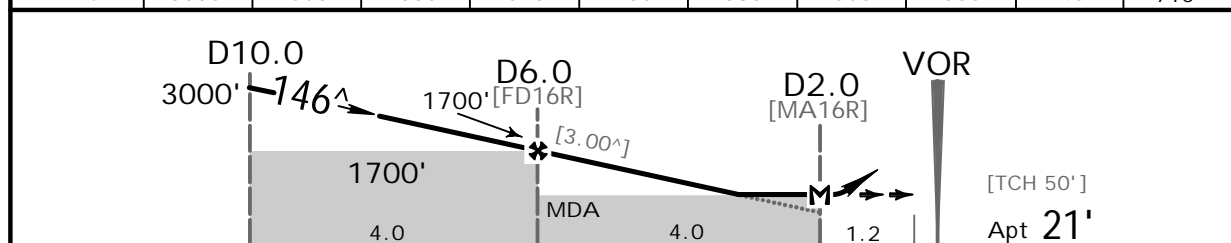

Gnd speed-Kts	70	90	100	120	140	160	Lighting - Refer to Airport Chart	RT	170°	3000'
Descent angle [3.00°]	372	478	531	637	743	849				
MAP at D2.0										

NS OPS

				CIRCLE-TO-LAND		No Circling Beyond D3.0 SY East of Rwy 16R & North of Rwy 25
				Max Kts	MDA(H)	
				A 100	710' (689')-2.4 km	
				B 135	1000' (979')-4.0 km	
				C 180	1000' (979')-4.0 km	
				D 205	1000' (979')-5.0 km	